



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines


Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

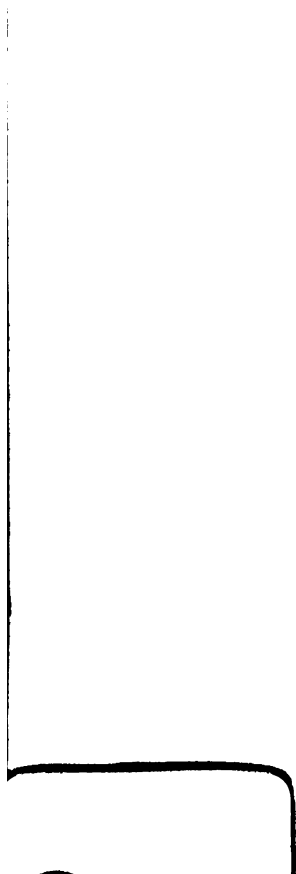

**K.F. WENDT LIBRARY
UW COLLEGE OF ENGR.
215 N. RANDALL AVENUE
MADISON, WI 53706**

(

PO

Lc

HANDY BOOK

FOR THE CALCULATION OF

STRAINS IN GIRDERS

AND SIMILAR STRUCTURES, AND THEIR STRENGTH;

CONSISTING OF

FORMULÆ AND CORRESPONDING DIAGRAMS,

WITH

NUMEROUS DETAILS FOR PRACTICAL APPLICATION,

ETC., ETC.

By WILLIAM HUMBER, Assoc. Inst. C.E.


**AUTHOR OF "A PRACTICAL TREATISE ON CAST AND WROUGHT IRON
BRIDGE CONSTRUCTION," "A RECORD OF THE PROGRESS
OF MODERN ENGINEERING,"
ETC., ETC.**

SECOND EDITION.

LONDON:

LOCKWOOD & CO., 7, STATIONERS' HALL COURT.

1872.



8374

SP

.H88

6261285

PREFACE.

NOTWITHSTANDING that the subject of Strains has been ably treated of again and again, it is difficult in submitting this little work to the public to avoid the almost stereotyped expression that "the design has been to supply a want long felt in the profession;" for the numerous volumes which have appeared on the subject have not, principally on account of their elaborate investigations, been calculated to afford that ready assistance which in the ordinary run of office and other work is being continually needed, while on the other hand, most of the general Engineering Pocket-books, not having been able to afford sufficient space to do justice to the subject, have been compelled to leave its treatment incomplete. It is hoped, therefore, that by devoting a small work, in a handy form, entirely to Bridge and Girder Calculations, without giving more than is absolutely necessary for the complete solution of practical problems, both the above obstacles to quick and satisfactory manipulation may be overcome.

One of the chief features of the present work is the extensive application of simply constructed *diagrams* to the calculation of the strains on bridges and girders, the advantages of which as a system, most undeniably far outweigh its disadvantages. The parabola (anything but a troublesome figure to draw) and a few right lines are all that are required.

There is, again, a more general application of the Moments of Rupture, and Shearing Forces, to open-webbed girders of all kinds, than has hitherto been attempted.

It was originally intended to divide the *whole* work into three sections or chapters, similar to those actually adopted only for the middle portion (pp. 24 to 60), which chapters should correspond with the various processes in the design of a bridge, thus making the very arrangement of the work a general guide. But it was afterwards deemed advisable, as will be seen, to place the Moments of Rupture, and Shearing Forces, by themselves at the commencement, as a basis upon which the remainder is principally founded.

In the following pages will be found, almost necessarily, many omissions, but care has been taken as far as possible to avoid inaccuracies. It will be observed that attention has been paid to the arrangement of the matter in different types, so as to facilitate as far as possible the manipulation of the contents. The work is not advanced with the pretensions of a treatise, as no *investigations* whatever are given, but merely their *results*; and these, it is hoped, in an intelligible and practical form, suited to the wants of the Engineer, Architect, Draughtsman, or Builder.

CONTENTS.

STRAINS IN BEAMS.

PARAGRAPH	PAGE
1. INTRODUCTORY.—Stability of a loaded beam	1
MOMENTS OF RUPTURE.	
2, 3. Abbreviations	1
4. Positive and negative moments	2
5, 6. Diagrams of the moments	2
7. Semi-beam loaded at extremity	2
8. Semi-beam loaded at several points	2
9. Semi-beam uniformly loaded	3
10. Semi-beam uniformly loaded for part of its length only	3
11. Semi-beam uniformly loaded, and also with a weight at its extremity	3
12. Beam loaded at the centre	4
13. Beam loaded at any other point	4
14. Beam loaded with several weights	4
15. Beam loaded with two equal weights equidistant about the centre	5
16. Beam loaded with four equal weights symmetrical from the centre	5
17. Beam loaded with a concentrated rolling-weight	6
18. Beam loaded with two concentrated rolling-weights	6
19. Beam uniformly loaded	6
20, 21. Beams with a load uniformly distributed over part of their lengths	7
22. Beam with a distributed rolling load	8
23. Points of contrary flexure	8
24. Beam of uniform section, or uniform strength, fixed at both ends and loaded at centre	9
25. Beam of uniform section, fixed at both ends, and uniformly loaded	9
26. Beam of uniform strength, fixed at both ends, and uniformly loaded	10
27. Beam of uniform section, uniformly loaded, the ends being subject to known moments of rupture	10
28. Beam of uniform section, fixed at one end only, and uniformly loaded	11

PARAGRAPH	PAGE
29. Beam of uniform strength, fixed at one end only, and uniformly loaded	11
30. Continuous beam, with uniformly distributed stationary load	12
31. Continuous beams with varying loads	12
32. Beam continuous over one pier, subject to a stationary, and also a moving load	12
33. Beam continuous over two or more piers, subject to a stationary, and also a moving load	14

SHEARING FORCES.

34, 35. Abbreviations and diagrams	16
36. General rule for the shearing force	16
37. Semi-beam loaded in any manner	16
38. Semi-beam uniformly loaded	17
39. Semi-beam loaded uniformly, and with a concentrated weight	17
40. Beam loaded at centre	17
41. Beam loaded at any point	17
42. Beam loaded with a concentrated rolling weight	17
43. Diagram of the shearing forces produced by a concentrated weight on a beam	18
44. Beam uniformly loaded	18
45. Beam with distributed moving load	18
46. General formulæ for the shearing forces in continuous beams	19
47. Beam fixed at both ends, and uniformly loaded	19
48. Beam of uniform strength, fixed at one end only, uniformly loaded	19
49. Beam of uniform section, fixed at one end only, uniformly loaded	20
50. Continuous beams with uniformly distributed stationary loads	20
51. Beam continuous over one pier, subject to a stationary, and also a moving load.	20
52. Beam continuous over two or more piers, subject to a stationary, and also a moving load	21

WELDED GIRDERS, ARCHES, AND SUSPENSION BRIDGES.

53. Processes in the design of a bridge	24
---	----

SECTION I.—DETERMINATION OF THE NATURE, PRINCIPAL DIMENSIONS, ETC., OF THE STRUCTURE.

54, 55. Kind of bridge and general cross-section	24
56—59. General proportions	25

SECTION II.—CALCULATION OF THE STRAINS ON THE VARIOUS PARTS.

60, 61. Approximate estimation of the weight of the structure	25
---	----

FLANGED GIRDERS WITH THIN CONTINUOUS WEBS.

PARAGRAPH	PAGE
62. Distinct functions of the flanges and the web	26
63—65. Strains in the flanges generally	26
66. Strains in the web generally	27

Girders with Parallel Straight Flanges.

67—71. Flanges	27
72—74. Web	28

Girders with Curved or Oblique Flanges.

75—78. Flanges	28
79—83. Web	28

GIRDERS WITH WEBS OF OPEN BRACING.

GENERAL RULES.

84—87. Booms	30
88—95. Web	30

CALCULATION BY MEANS OF THE MOMENTS OF RUPTURE AND SHEARING FORCES.

96. Loads concentrated at apices	31
--	----

Girders with Parallel Straight Booms.

97, 98. Notes	31
99. Warren girder, loaded on one boom	31
100, 101. Counter strains in the web	32
102. Warren girder, both booms loaded	32
103. Girder with vertical struts and inclined ties	32
104. Warren girder with scalene bracing, loaded on one boom	33
105, 106. Method of applying the diagrams	33
107. Lattice girder loaded on one boom	34
108. Lattice semi-girder loaded on one boom	35
109, 109A. Lattice, whole or semi, girder loaded equally on both booms	36
110. Concentrated loads on lattice girders	36

Girders with Curved or Oblique Booms.

111. Curved or oblique whole or semi-girder, single-triangular web, loaded on one boom	37
112. Curved or oblique whole or semi-girder, single-triangular web, loaded equally on both booms	37
113, 113A. Continuous girders	38
114. Fixing the points of inflection in continuous girders	38
115. Continuous girders with varying depths	38

CALCULATION BY THE COMPOSITION AND RESOLUTION OF FORCES.

116. Method	38
117. Reaction of supports	39
118, 119. Composition and resolution of forces—parallelogram—triangle	39
120. More than one concentrated load on a girder	39

PARAGRAPH	PAGE
<i>Example—strains in a bent girder (roof principal)</i>	
121. Calculation by the moments of rupture and shearing forces	39
122. Calculation by the composition and resolution of forces	41
METHODS OF CALCULATION FOUNDED ON THE PARALLELOGRAM OF FORCES.	
123. General law of the strains in the booms	41
124. Note on General Rules for booms and bracing	42
125. Concentration of loads at the apices	42
126. Trigonometrical functions	42
127. Straight semi-girder, loaded in any manner	42
128. Example	42
129. Straight Warren semi-girder, loaded at extremity	43
130. Straight Warren semi-girder, loaded uniformly on one boom	43
131. Straight Warren girder, loaded at any point	43
132. Same, with weight at centre	44
133. Straight Warren girder, with a concentrated rolling load	44
134. Any straight Warren or lattice girder, with any load symmetrically disposed about the centre	44
135. Any straight Warren or lattice girder, with a uniformly distributed moving load	45
136. Example	45
137. Dead and live loads on girders	46
138. Any straight Warren, lattice, or other girder, with an unsymmetrical load	46
139. Lattice girders with the bars fixed at their intersection	46
140. Simple truss; central load	46
141. Same; load not at centre	47
142. Note on the above two cases	47
143. Simple truss; load distributed	47
144. Compound truss	47
ARCH BRIDGES.	
ARCHES WITH SPANDRIL BRACING.	
145. Uniform horizontal load	48
146. Moving load	48
UNBRACED ARCHES.	
147. Neutral surface or curve	49
148. Line of pressures	49
149—154. Stability of arches	49
154A. Arched bridge of several spans	50
SUSPENSION BRIDGES.	
155. Suspension bridge of one span, uniform horizontal load	51
156. Suspension bridge of more than one span, uniform hori- zontal load	51
157. Suspension bridge with sloping rods, uniform horizontal load	52
158—161c. Suspension bridges with moving loads	52
162. Abutments and Piers	53

SECTION III.—DISTRIBUTION OF MATERIAL TO RESIST THE CALCULATED STRAINS.

PARAGRAPH	PAGE
163, 164. Strength of structures	53
165. Uniform strength	54
166. Units	54

PRINCIPAL STRAINS TO BE MET, ETC.

167. Tension	54
168. Compression	54
169. Breaking weights of columns	55
170. Long struts	56
171. Shearing	56
172. Coefficients of safety	56
173. Modulus of elasticity	56

JOINTS.

174, 175. General rules	57
-----------------------------------	----

IRON JOINTS AND FASTENINGS.

176. Rivets	57
177, 178. Bolts	57
179. Pin joints in tension bars	57

Riveted Joints in Tension.

180, 181. Effective section, &c., of a plate	58
182. Lap-joints	58
183. Fish-joints	59

Riveted Joints in Compression.

184. Lap-joints	59
185. Butt-joints	59
186. Gibs and cotters	59

JOINTS IN TIMBER STRUCTURES.

187. General note	59
188. Joints in tension—fished and scarfed	59
189. Joints in compression	6
190. Shouldered tenon for attaching cross to main beams	6

BEAMS OF VARIOUS SECTIONS.

191. General remarks	60
192—195. Designing a beam	60
196. Stability of a loaded beam	61
197. Abbreviations	61
198, 199. Neutral axis	61
200, 201. Notes	61
202. Curved beams	61
203. Modulus of rupture	62

MOMENTS OF INERTIA AND RESISTANCE OF BEAMS OF
VARIOUS SECTIONS.

PARAGRAPH	PAGE
204. Beam of solid rectangular section	62
205. Beam of hollow rectangular section	62
206. Beam of solid circular section	62
207. Beam of hollow circular section	63
208. Beam of solid elliptical section	63
209. Beam of hollow elliptical section	63
210. Beam with one flange	63
211. Beam with two equal flanges	64
212. Beam with two unequal flanges	64
213. Beam of any section	64
214. Similar beams	64
215—218. Beams of rectangular section and of uniform strength	65
219. How to cut the strongest and stiffest beam from a cylindrical log	66
220. To find the centre of gravity of any cross section	65

DEFLECTION.

221. Definition	66
222. Camber	66
223. Girders of uniform section	66
224. Flanged girders of uniform strength	66
225. Flanged semi-girders of uniform strength	67
226. Continuous girders and whole girders fixed at one or both ends	67

BREAKING AND SAFE LOADS FOR BRIDGES AND
GIRDERS.

227, 228. Breaking or safe load found from amount of material, span, &c.	67
229. Example I.—Flanged girder	68
230. Example II.—Semi-beam of rectangular section	68
231. Table of the strength and elasticity of materials	68
232. Methods of constructing parabolas	70

Directions to Binder.

Plate I. to form	<i>Frontispiece.</i>
„ II. to face	Page 58
„ III. to face	„ 70

FORMULÆ AND DIAGRAM

FOR THE

CALCULATION OF GIRDERS, &c.

STRAINS IN BEAMS.

1. THE STABILITY OF A LOADED BEAM or girder is founded on the equality that must always exist between the resultants of all the various external forces tending to cause its rupture, and the sum of the molecular reactions which resist the same. The former may be resolved—(1) *horizontally* into strains, depending for their value upon what are known as *Moments of Rupture*, or *Bending Moments*, tending to cause the failure of the beam, by tearing asunder its fibres in one part and crushing them together in another (4) : and (2) *vertically* into what are known as *Shearing Forces*, due to the transmission of the vertical pressure of the load to the points of support, and tending to cause contiguous vertical sections in the beam to slide over each other (171). The values of the molecular reactions are the *Moments of Resistance*, for which see (204—214).

MOMENTS OF RUPTURE.

2. Abbreviations adopted in the Formulæ.

- M_x = moment of rupture at any point (x).
 M_A, M_B = „ at points of support (A, B).
 M_G = „ at centre of span.
 l = length of clear span = distance between supports in a whole beam = distance between W and support in a semi-beam loaded with W. Where used in any other way explanation will be made.
 x = horizontal distance between the left abutment (except where otherwise stated) and the point at which M is to be found.
W = concentrated load at any point (61).
 w = distributed stationary or dead load per unit of length.
 w' = „ moving or live „ „ (61).
Def. = maximum deflection (221) for a beam of uniform section (223).
I = moment of inertia of the section of the beam (for value see 204—214).
E = modulus of elasticity (173) ; for value see 231.
Other abbreviations will be explained as they occur.

3. NOTE. l , x , and other horizontal distances when occurring in the same case, must be all of the same denomination ; and so also must w and w' .

4. NOTE.—The value of a formula being $\left(\begin{smallmatrix} \text{positive (+)} \\ \text{negative (-)} \end{smallmatrix}\right)$ shows that the action of the load makes, or tends to make the upper surface of the beam $\left(\begin{smallmatrix} \text{concave,} \\ \text{convex,} \end{smallmatrix}\right)$ and therefore compresses together the fibres in the $\left(\begin{smallmatrix} \text{upper} \\ \text{lower} \end{smallmatrix}\right)$ part, and stretches them in the $\left(\begin{smallmatrix} \text{lower} \\ \text{upper} \end{smallmatrix}\right)$ part.

5. In the DIAGRAMS, the ordinates (the vertical distances from the horizontal, or other lines) to the curves, &c., as shown thereon, correspond to the values of the formulæ accompanying them. If the diagram be drawn to scale in the manner directed, the Moments of Rupture may be obtained by *direct measurement*.

Fig. A.




Fig. B.



The vertical lines, as in fig. A, correspond to positive, and those as in fig. B to negative values in the formulæ (4).

6. When a diagram is used in the calculation of the moments, it should be drawn immediately under, or over, and to the same horizontal scale as the outline sketch (53, III., and 59) of the girder itself, so that the ordinates in the diagram will correspond with the several points in the length of the girder to which they apply.

7. Semi-Beam Fixed at One End, and Loaded with a Concentrated Weight at the Other.

Fig. 1.



$$M_A = -Wl \quad . \quad . \quad . \quad (4.)$$

$$M_x = -W(l-x) \quad . \quad . \quad . \quad (4.)$$

$$\text{Def.} = \frac{Wl^3}{3EI}.$$

DIAGRAM.—Let AB be the beam (5, 6). Draw AC = Wl. Join C to B. Then the vertical distances between A B and C B will give the moments of rupture.

8. Semi-Beam Fixed at One End, and Loaded with several Concentrated Weights, W, W₁, W₂ (37).

Fig. 2.



$$M_A = -(Wl + W_1 l_1 + W_2 l_2) \quad . \quad . \quad . \quad (4.)$$

$$M_x = -\{W(l-x) + W_1(l_1-x) + W_2(l_2-x)\} \quad (4.)$$

When $(l-x)$ or (l_1-x) , or so on, is negative, it is to be omitted.

DIAGRAM.—Let AB be the beam (5, 6). Draw AD = W₂ l₂, DC = W₁ l₁, and AE = Wl. Join D to B, E to W, and C to F, in the manner shown. Then the vertical distances between C F B and E W B will give the moments of rupture.

9. Semi-Beam Fixed at One End, and Loaded Uniformly its Entire Length (38).

$M = -\frac{wl^2}{2}$; one-half that due to the same load (wl) concentrated at the end.

$$M_x = -\frac{w}{2}(l-x)^2 \quad \dots (4.)$$

$$\text{Def.} = \frac{wl^4}{8EI}.$$

Fig. 3.



DIAGRAM.—Let AB be the beam (5, 6). Draw $AC = \frac{wl^2}{2}$. Draw the parabola CB , whose vertex is at B (232). Then the vertical distances between $A B$ and $C B$ will give the moments of rupture.

10. Semi-Beam Fixed at One End, with a Load Uniformly Distributed over Part of its Length.

Let z = the length of the load ;—

$$M_A = -wz \left(l - \frac{z}{2} \right).$$

When x is less than or equal to $(l - z)$, then

$$M_x = -wz \left(l - \frac{z}{2} - x \right).$$

When x is greater than $(l - z)$, then

$$M_x = -\frac{w}{2}(l-x)^2. \quad \dots (4.)$$

Fig. 4.



DIAGRAM.—Let AB be the beam (5, 6). At A erect $AC = wz \left(l - \frac{z}{2} \right)$. Join C to a point in AB at the mid length of the load z (as in the Fig.). Draw the semi-parabola DB (232) the same as for a beam of the length z , fully loaded (9). The vertical distances between $A B$ and CDB will give the moments of rupture.

11. Semi-Beam Fixed at One End, and Loaded with a Uniformly Distributed Load, and also a Concentrated Load at its Extremity (39).

$$M_A = - \left(W + \frac{wl}{2} \right) l. \quad \dots (4.)$$

$$M_x = - \left(W(l-x) + \frac{w}{2}(l-x)^2 \right) \quad (4.)$$

$$\text{Def.} = \frac{l^3}{EI} \left(\frac{W}{3} + \frac{wl}{8} \right).$$

Fig. 5.



DIAGRAM.—Let AB be the beam (5, 6). Draw $AC = \frac{wl^2}{2}$, and $AD = Wl$. Draw the parabola CB (as in 9) with its vertex at B (232). Then the vertical distances between DB and $C B$ will give the moments of rupture. This is but a combination of (7) and (9).

$M_x = \frac{1}{l} (W a x + W_1 a_1 x + W_2 b_2 x)$, having regard to the note in (13).

$$M_A = M_B = 0.$$

DIAGRAM.—Let AB be the beam (5, 6). Draw ACB , ADB , and AEB as for three separate cases, by (13). Produce WC till $WL = WF + WG + WC$. Produce W_1D till $W_1N = W_1H + W_1I + W_1D$; and so on for the weight W_2 , making $W_2P = W_2K + W_2J + W_2E$. Join A to L , L to N , N to P , and P to B . Then the ordinates from AB to the polygonal figure $ALNPB$ will give the moments of rupture.

NOTE. If the weights be all equal, the verticals at the weights representing the moments produced there by those weights (as WC , W_1D , W_2E) will all be ordinates to a parabola (232) drawn as for (17).

The following cases (15, 16) are adaptations of the above scheme to conditions frequently met with in practice.

15. Beam Supported at Both Ends, and Loaded with Two Equal Weights placed Equidistant from the Centre.*


The moment for any point between the weights is a constant quantity

$$= \frac{W(l - \delta)}{2} = Wa = Wb.$$

Between the weights and the supports $M_x = W_x$. $M_A = M_B = 0$.

DIAGRAM.—Let AB be the beam (5, 6). At the weights erect WC and WD each equal to (Wa) . Join A to C , C to D , and D to B . Then the vertical distances between AB and $ACDB$ will give the moments of rupture.

Fig. 9.



16. Beam Supported at Both Ends, and Loaded with Four Equal Weights symmetrically disposed about the Centre.†


M at $W_1 = M$ at $W_2 = W(2a + a')$; constant from W_1 to W_2 .

M at $W = M$ at $W_3 = 2Wa$.

$$M_A = M_B = 0.$$

DIAGRAM.—Let AB be the beam (5, 6). At W and W_3 erect WC and W_3F , each equal to $(2Wa)$; and at W_1 and W_2 erect W_1D and W_2E , each equal to $W(2a + a')$. Join A to C , C to D , D to E , E to F , and F to B . Then the vertical distances between AB and $ACDEFB$ will give the moments of rupture.

Fig. 10.



* As in the case of a cross girder carrying a single line of railway.

† Case of a cross girder carrying a double line of railway.

17. Beam Supported at Both Ends, Loaded with a Concentrated Rolling Weight (42).

Fig. 11.



The maximum moment at any point—

$$M_x = \frac{W x (l-x)}{l}.$$

$$M_A = M_B = 0.$$

DIAGRAM.—Let A B be the beam (5, 6). Draw the parabola A D B

(232), whose ordinate at centre (C D) = $\frac{W l}{4}$. Then the vertical distances between A B and the parabola A D B will give the maximum moments of rupture.

18. Beam Supported at Both Ends, and Loaded with Two Weights moving simultaneously in either direction over the Beam.*

Fig. 12.



Let w and w_1 be the two weights. The value of the maximum moment produced at any point is

$$M_x = \frac{x}{l} \{ (w + w_1) (l-x) - w_1 \delta \}$$

x being measured from the nearest pier. The position of w causing the greatest moment is when $x = \frac{l}{2} \pm \frac{w_1 \delta}{2(w + w_1)}$. Or if the two weights be equal; when $x = \frac{l}{2} \pm \frac{\delta}{4}$.

$$M_A = M_B = 0.$$

DIAGRAM.—Let A B be the beam (5, 6). Draw the parabola A C B (232), whose ordinate at centre = $\frac{(w + w_1) l}{4}$. At A and B erect A D and B E = $w_1 \delta$. Join A to E and D to B. Then the vertical distances between A F B and the parabola A C B will give the maximum moments of rupture.

19. Beam Supported at Both Ends, and Loaded uniformly its entire length (44).

Fig. 13.



$$M_x = \frac{w x}{2} (l-x). \quad M_c = \frac{w l^2}{8}.$$

$$M_A = M_B = 0.$$

$$\text{Def.} = \frac{5 w l^4}{384 E I};—$$

one half the moment at centre, and $\frac{5}{8}$ the deflection produced by the same load concentrated at the centre.

DIAGRAM.—Let A B be the beam (5, 6). On A B draw the parabola

* As in the coupled driving wheels of a locomotive.

A C B (232) whose ordinate at centre $= \frac{w l^2}{8}$. Then the vertical distances between A B and the parabola A C B will give the moments of rupture.

20. Beam supported at Both Ends, subject to a Load uniformly Distributed over a certain Length from one Support (45).

Fig. 14.

Let z equal the length of the load, and let x be measured from the abutment from which the load advances.

The greatest moment produced by a given length of load will be at its extremity, or when $x = z$, that is, provided the load does not extend beyond the centre of the span; for should it depass that point, the greatest strain will remain constant in position at the midspan, increasing in intensity until the load completely covers the span.



$$\text{When } x = z, \text{ or more than } z, M_x = \frac{w z^2 (l - x)}{2 l}.$$

$$\text{When } x \text{ is less than } z, M_x = \frac{w x}{2} \left\{ \frac{z (2 l - z)}{l} - x \right\}.$$

$$M_A = M_B = 0.$$

DIAGRAM.—Let A B be the beam (5, 6). At the extremity (C) of the load draw $CD = \frac{w z^2 (l - z)}{2 l}$. Join A to D, and B to D. Draw the parabola A E C (232), whose ordinate at its centre $= \frac{w z^2}{8}$; the same as if for a uniform load on a beam A C, supported at A and C. (19). Then the vertical distances between A D B and A E C B will give the moments of rupture.

21. Beam supported at Both Ends, subject to a Load uniformly Distributed over a certain Length not Extending to either Support.


Let z = the length of the load.

Let v = the distance from the load to the left support; and let x be measured from the same support.

When $x = v$, or less than v ,

$$M_x = \frac{w z x}{l} \left(l - v - \frac{z}{2} \right).$$

Fig. 15.



When x is equal to or greater than $(v + z)$,

$$M_x = \frac{w z}{l} \left(v + \frac{z}{2} \right) (l - x).$$

When x is greater than v , and less than $(v + z)$,

$$M_x = \frac{w x}{2} \left\{ 2 z + 2 v - x - \frac{z (z + 2 v)}{l} \right\} - \frac{w v^2}{2}.$$

$$M_A = M_B = 0.$$

DIAGRAM.—Let $A B$ be the beam (5, 6). And let the load extend over the length z . At K , the centre of the load, erect $K H = \frac{w z a b}{l}$. Join H to A and H to B . At C and D , the extremities of the load, draw perpendiculars to $A B$, intersecting $H A$ and $H B$ in F and G respectively. Join F to G . On $C D$, draw the parabola $C E D$ (232), whose ordinate at centre is equal to $\frac{w z^2}{8}$, the same as for a distributed load on a beam of the length z , and supported at C and D (10). Then the vertical distances between $A C E D B$ and $A F G B$ will give the moments of rupture.

22. Beam Supported at Both Ends, subject to a Rolling Distributed Load of a Length less than that of the Beam.

Fig. 16.



Let z = the length of the load.

Maximum moment at any point,

$$M_x = \frac{w z x (l - x)}{l} - \frac{w z^2}{8}.$$

This will cease to give the correct value when x approaches nearer either support than $\frac{z}{2}$, beyond which limits z in the formula must be taken equal to $2x$.

DIAGRAM.—Let $A B$ be the beam (5, 6). On $A B$ draw the parabola $A D B$ (232), whose ordinate at centre = $\frac{w z l}{4}$. Make $C E = \frac{w z^2}{8}$. Through E draw $E F$ parallel to $A B$. Make the horizontal distance of F and E from A and B respectively (as $C B$) = $\frac{z}{2}$. The diagram will be accurate from F to E . But for the construction beyond those limits proceed as follows. Draw the semi-parabola $E B$ (232) whose vertex is at B . Divide $C B$ into a number of parts n (say five), and at the divisions draw verticals. At the first division from B take $\frac{1}{n}$ ($= \frac{1}{5}$) of the vertical distance between the parabolic arcs $E B$, and $D B$ measuring from $E B$. At the second division take $\frac{2}{n}$ and so on, counting the divisions from the abutment, and measuring from the smaller (lower) parabola, $E B$. The points thus obtained will enable the curve, as shown in the diagram, to be traced through. Repeat the same operation on the opposite end of the beam. And then the vertical distances between $A H D K B$ and $A F E B$ will give the moments of rupture.

23. Points of Contrary Flexure, or of inflexion, or of “no-rvature,” as they are sometimes called, are points at which the upper and lower surfaces change from convexity to concavity (4), and *vice versa* (see fig. 23). At these points, as there is no curvature there is no moment of rupture, for the moments of rupture are the intensities of the curving or bending forces (1).

24. Beam of Equal and Uniform Section, or Beam of Uniform Strength (165), Fixed horizontally at the Ends, and Loaded at the Centre. (See 30.)

The length ff' is identical with (12), and the parts Af and Bf' with (7).

$$M_c = \frac{Wl}{8}. \quad M_x = \frac{W}{2} \left(x - \frac{l}{4} \right).$$

$$M_A = M_B = -\frac{Wl}{8}. \quad . \quad . \quad . \quad (4.)$$




Fig. 17.

Where $M_x = 0$ there are *points of contrary flexure*, distant from their respective piers by $\frac{1}{4} l$.

DIAGRAM.—Let AB be the beam (5, 6). At mid-span erect $CW = \frac{Wl}{4}$.

At A and B erect AD and BE , each $= \frac{Wl}{8}$. Join D to E , and C to A and B . Then the vertical distances between DE and ACB will give the moments of rupture.

The *points of contrary flexure* (23) are at the intersection of AC and CB , with DE .

25. Beam of Equal and Uniform Section, Fixed horizontally at Both Ends, and Loaded uniformly its entire Length (47). (See 30.)


The length ff' is identical with (19), and the parts Af and Bf' with (11), the concentrated load at the extremity of each semi-beam Af, Bf' being equal to half the distributed load on ff' .

Fig. 18.

$$M_c = \frac{wl^2}{24}.$$

$$M_x = \frac{wx}{2} (l - x) - \frac{wl^2}{12}.$$

$$M_A = M_B = -\frac{wl^2}{12}. \quad . \quad . \quad . \quad (4.)$$



Where $M_x = 0$, there are the *points of contrary flexure* (23), distant from A and B respectively by $\frac{5}{12} l$.

Def. $= \frac{5wl^4}{1536EI}$ = one quarter that of the same beam if not fixed at the ends.

DIAGRAM.—Let AB be the beam (5, 6). On AB draw the parabola ACB (232), whose ordinate at centre $CD = \frac{wl^2}{8}$. At A and B erect


AE and BF respectively, each equal to $\frac{wl^2}{12}$. Join E to F . Then the vertical distances between EF and ACB will give the moments of rupture.

The *points of contrary flexure* (23), are at the intersection of ACB with EF .

26. Beam of Uniform Strength (165), Fixed horizontally at Both Ends, and Loaded uniformly its entire Length (47). (See 30.)

The length ff' ($= \frac{1}{2}l$) is identical with (19), and the parts Af and Bf' with (11); the concentrated load at the extremity of each being equal to $\frac{wl}{4}$ = half the load on ff' .

Fig. 19.



$$M_c = \frac{wl^2}{32}$$

$$M_x = \frac{wx}{2}(l-x) - \frac{3wl^2}{32} \quad (4.)$$

$$M_A = M_B = -\frac{3wl^2}{32} \quad (4.)$$

Where $M_x = 0$, there are the *points of contrary flexure* (23).

$$Af = Bf' = \frac{l}{4}.$$

DIAGRAM.—Let AB be the beam (5, 6). On AB draw the parabola ACB (232), whose ordinate at centre (CD) $= -\frac{wl^2}{8}$. At A and B erect AE and BF respectively, each $= \frac{3wl^2}{32}$. Join E to F . Then the vertical distances between EF and ACB will give the moments of rupture. The *points of contrary flexure* (23) are at the intersection of ACB with EF .

27. Beam of Uniform and Equal Section, resting on Two Supports and uniformly Loaded, the Extremities being Subjected to two known Moments of Rupture (M_A , M_B) acting in a Contrary Direction to those due to the Load (46).

Fig. 20.



$$M_x = \frac{wx}{2}(l-x) - M_A +$$

$$\frac{x}{l}(M_A - M_B).$$

Where $M_x = 0$, there are the *points of contrary flexure*.

DIAGRAM.—Let AB be the beam (5, 6). On AB draw the parabola ACB (232), whose ordinate at centre $CD = \frac{wl^2}{8}$. At A and B erect AE

and BF respectively, making $AE = M_A$, and $BF = M_B$. Join E to F . Then the vertical distances between EF and ACB will give the moments of rupture. Where EF intersects ACB , there will be the *points of contrary flexure* (23).

28. Beam of Uniform and Equal Section, supported at One End (A), and Fixed horizontally at the Other (B)*, uniformly Loaded over its entire Length (49).

This case is identical with the length f B of (25).

$$M = \frac{wx}{2}(l-x) - \frac{wlx}{8} \quad (x \text{ being measured from the unfixed end}).$$

$$M_A = 0. \quad M_B = -\frac{wl^2}{8}. \quad (4.)$$

The *point of contrary flexure* (23) is where $M_x = 0$.

$$Af = \frac{3l}{4}. \quad M \text{ at midway between A and } f = \frac{9wl^2}{128}.$$

DIAGRAM.—Let AB be the beam (5, 6). On AB draw the parabola ACB (23), whose ordinate at centre $CD = \frac{wl^2}{8}$. At B , the fixed end of the beam, erect $BE = \frac{wl^2}{8} = CD$. Join A to E . Then the vertical distances between AE and ACB will give the moments of rupture. Where AE intersects CB , there will be the *point of contrary flexure* (23).



Fig. 21.

29. Beam of Uniform Strength (165), supported at One End (A) and Fixed horizontally at the other (B)*, uniformly Loaded over its entire Length (48).

This case is identical with the length f B of (26).

$$M_x = \frac{wx}{2}(l-x) - \frac{wlx}{6}, \quad (x \text{ being measured from the unfixed end}).$$

$$M_A = 0. \quad M_B = -\frac{wl^2}{6}. \quad (4.)$$

$$M \text{ at midway between A and } f = \frac{wl^2}{18}.$$



Fig. 22.

$$\text{The point of contrary flexure (23) is where } M_x = 0. \quad Af = \frac{2}{3}l.$$

* See 30.

† The values in this case are slightly erroneous. The correct value for Af is 733 l.

DIAGRAM.—Let AB be the beam (5, 6). On AB draw the parabola ACB (232), whose ordinate at centre (CD) = $\frac{wl^2}{8}$. At B , the fixed end of the girder, erect $BE = M_2 = \frac{wl^2}{6}$. Join A to E . Then the vertical distances between A E and ACB will give the moments of rupture. Where A E intersects ACB , there is the *point of contrary flexure* (23).

30. Beam continuous for two or more Rightly Proportioned * Spans, subject to a Stationary Load, Uniformly Distributed over its entire Length (50).

All such cases may be regarded as combinations of some of the cases previously given (24—29). For if, in any of the latter, the beam, instead of being fixed at one or both ends, be continued over a support where originally fixed, and subjected to the action of a load, which shall produce at the point of support a moment equal to that produced there by the first load when the beam was fixed at that support, then the moments in the original length of the beam will remain as they were, and will not be affected by the substitution of the continuation for the fixing.

Fig. 23.



Let AF be a beam continuous over a number of equidistant piers, $B, C, \&c$.

If the beam be of uniform strength (165), the outer spans (AB and EF) should be $\frac{2}{3}$ the length of the others. If of uniform section, the outer spans should be .789 the length of the others. (See 113 A.)

The end spans may be regarded as identical with (28) or (29), and the remaining spans with (24, 25, or 26), so that the moments of rupture may be obtained from the formulæ or diagrams there given.

31. Continuous Beams, not of Uniform Section, subject to Varying Loads.

It would, perhaps, be impossible to give mathematically accurate formulæ for the moments of rupture in continuous beams, with moving loads, that would be worth anything for practical application. A well-known author† has even pronounced the case "too complicated for investigation."

The following approximations, however, may be relied on for *safety without extravagance*.

32. Beam of Uniform Strength (165) for the Maximum Strains,

* By rightly proportioned is meant, proportioned so that if the beam were fixed on any one of the piers instead of continuous over it, the moments produced there by the two adjacent loaded spans would be equal. Then if this condition be observed the case will include beams not uniformly loaded throughout.

† J. H. Latham, Esq., M.A.—"Iron Bridges."

continuous over one Pier, forming two Equal Spans, subject to a Fixed Load Uniformly Distributed, and also to a Moving Load (51). (See 113 A.)

The greatest moment over the pier will be produced when both spans are fully loaded. Each span will then nearly correspond to (29).

The greatest positive (4) moment will obtain in the span fully loaded, when the other span bears only the fixed load.

Let w = fixed load per unite of length.

w' = varying " "

and let x be always measured from an abutment, and not from the pier. Then,

$$\text{Maxm. positive (4) moment, } M_x = \frac{x(w + w')(l - x)}{2} - \frac{(2w + w')xl}{12}.$$

$$\text{Maxm. negative (4) moment over pier (C) = } -\frac{(w + w')l^2}{6}.$$

$$\text{Max. neg. mom. at any other point, } \left\{ \begin{array}{l} M_x = \frac{x}{6}(w + w')(2l - 3x), \text{ or} \\ M_x = \frac{wx}{2}(l - x) - \frac{xl}{12}(2w + w'), \end{array} \right\} \begin{array}{l} \text{the greater to} \\ \text{be taken.} \end{array}$$

Any positive value of the last two, and any negative value of the first of these four equations, must of course be disregarded,

$$M_A = M_B = 0.$$

By making $M_x = 0$ in the first and last equations, and then finding the value of x , the limits of deviation of the points of contrary flexure (23) may be obtained.*

Fig 24.

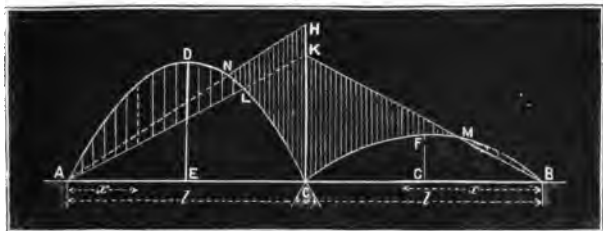


DIAGRAM.—Let A C B be the beam (5, 6). On A C draw the parabola A D C (232), whose ordinate at centre D E = $(w + w') \frac{l^2}{8}$; and on C B draw the parabola C F B (232), whose ordinate at centre F G = $\frac{wl^2}{8}$. At the centre

* If $\left(\frac{wl}{2}\right)$ be not greater than $\left(\frac{(2w + w')l^2}{12}\right)$, the beam will require holding down to the abutments.

pier erect $CH = \frac{(w + w') l^2}{6}$, and, measuring from C, make $CK = \frac{(2w + w') l^2}{12}$. Join H to A, and K to A and B. Then the vertical distances

between the parabolic arc A D L and A L will give the maximum positive (4) moments. The vertical distances between N H and the arc N L C, or those between K M and C F M, whichever be the greater, will give the maximum negative (4) moments. The points of contrary flexure (23) will approach as near the centre pier as L, and recede from it as far as M. (See foot note, p. 13.)

NOTE.—The various values, &c., given above, apply equally to both the spans.

The diagram above is drawn to scale, on the supposition that the rolling load is $\frac{1}{3}$ the intensity of the fixed load.

33. Beam of Uniform Strength (165) for the Maximum Strains, continuous over two or more Piers, subject to a Fixed Load Uniformly Distributed, and also to a Moving Load (52). (See 113 A.)

The maximum moment over any pier will obtain, when only the two adjacent spans, and every alternate span from them, are simultaneously loaded with the greatest load, the remaining spans sustaining only the fixed load.

The maximum moment at the centre of any span will obtain when it and the alternate spans from it are fully loaded, the remaining spans sustaining only the fixed load.

Let w = the fixed or dead load per unit of length.

w' = the moving or live " "

l' = either outer span. "

l = any other span.*

Then, the maximum negative (4) moment over any pier, B or C.,

$$M_x = M_c = -\frac{l^2}{3} \left(\frac{2w}{7} + \frac{w'}{2} \right).$$

Maximum negative (4) moment between any two piers (i.e., in any inner span, l),

$$M_x = \frac{x(w + w')}{2} (l - x) - \frac{l^2}{3} \left(\frac{2w}{7} + \frac{w'}{2} \right),$$

(positive values of which must be disregarded).

Maximum positive (4) moments between any two piers (i.e., in any inner span, l),

$$M_x = \frac{(w + w')}{2} (l - x) x - \frac{3wl^2}{32},$$

(negative values of which must be disregarded).

For either outer span, the maximum negative moments,

$$M_x = \frac{x(w + w')}{2} (l - x) - \frac{x l^2}{3 l'} \left(\frac{2w}{7} + \frac{w'}{2} \right),$$

(positive values of which must be disregarded).

there be but three spans, a modification of the values hereafter given will be necessary, which see.

The maximum positive moments,

$$M_x = \frac{x(w+w')}{2} (l-x) - \frac{3wxl^2}{32l},$$

x being measured from the abutment.

If any of the foregoing expressions for M_x be made equal to 0, the value of x obtained from them will give the positions of the points of contrary flexure (23).*

NOTE.—If the beam be continuous for three spans only, l , as a coefficient in the expression $\frac{l^2}{3} \left(\frac{2w}{7} + \frac{w'}{2} \right)$, or in $\frac{x l^2}{3l'} \left(\frac{2w}{7} + \frac{w'}{2} \right)$, must have a value given to it $= \frac{l+l'}{2}$.

Fig. 25.

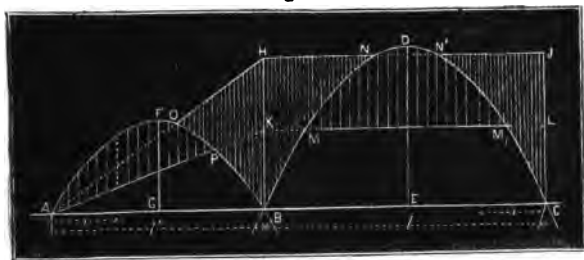


DIAGRAM.—Let ABC (5, 6) be part of the beam. On BC draw the parabola BDC (232), whose ordinate at centre (DE) $= \frac{(w+w')l^2}{8}$. On AB draw the parabola AFB (232), whose ordinate at centre (FG) $= \frac{(w+w')l'^2}{8}$. At B and C erect BH and CJ† respectively, each $= \frac{l^2}{8} \left(\frac{2w}{7} + \frac{w'}{2} \right)$. Join A to H and H to J. Measuring from B and C, make BK and CL, each $= \frac{3wl^2}{32}$. Join A to K and K to L.

The vertical distances between AFO and AP give the maximum positive moments for either outer span; and those between MND and M'N', and M and M', give those for any inner span. The vertical distances between OH and OPB give the maximum negative moments for the outer spans; and those between HN and BMN, or between N'J and N'M'C, give the maximum negative moments for any inner span.

The points O and P, and M and N or M', and N', show the limits of deviation of the points of contrary flexure (23).

The diagram above is drawn to scale, on the supposition that the intensity of the rolling load is one-half that of the fixed load.

* If $\left(\frac{wl^2}{2} \right)$ be not greater than $\left(\frac{3(w+w')l^2}{32} \right)$, the beam will require holdin down to the abutments.

† N.B.—The note given above (for the value of l in the formula) must be observed here.

33 A. NOTE.—The moment of rupture at any point, produced by several loads acting simultaneously on a beam, is equal to the sum of the moments produced by the several loads acting separately.

SHEARING FORCES (1).

34. Abbreviations :—

Let P and P' = the reactions on the supports due to the total load on the beam between those supports.

$S H_x$ = the shearing force at any point x .

w = distributed load per unit of length (61).

W = total load concentrated at any point (61).

x = distance from left-hand support to the section at which $S H$ is required.

l = length of span.

Other abbreviations will be explained where they occur.

35. In the **DIAGRAMS**, the ordinates (the vertical distances from the horizontal or other lines) to the curves, &c., as shown thereon, correspond to the values of the formulæ accompanying them. If the diagram be drawn to scale in the manner as directed, the shearing forces may be obtained by *direct measurement*. See also (6).


36. General Rule for determining the Shearing Force at any part of a Beam and under any Distribution of Load.

Let it be required to find the shearing force at any point (C) of a beam.

Fig. 26.

Let W' = the load between A and C.

W'' = „ B and C.



Then, $S H$ at C =

$S H_x = P - W'$, or $= P' - W''$;—

the greater of the two values to be taken.

At the supports, W' or $W'' = 0$; so that the shearing forces there are always equal to P or P' . The above values hold good for semi-beams.

37. Semi-beam Fixed at One End, free at the Other, and Loaded in any Manner (8).

Fig. 27.



The shearing force at any point P is equal to all the load between that point and the unsupported extremity.

38. Semi-beam Fixed at One End only, and uniformly Loaded its entire Length (9).

$$S H_x = w(l - x). \quad S H_A = w l.$$

DIAGRAM.—Let AB be the beam (35). At A erect $AC = w l$. Join C to B . Then the vertical distances between AB and CB will give the shearing forces.




Fig. 28.

39. Beam Fixed at One End only, Loaded uniformly its entire Length, and also with a Concentrated Weight at its free Extremity (11).

$$S H_x = W + w(l - x). \quad S H_A = W + w l.$$

DIAGRAM.—Let AB be the beam (35). Make $AC = w l$. Join C to B (as in 38). Make AD and $BE = W$. Join D to E . Then the vertical distances between CB and DE will give the shearing forces.




Fig. 29.

40. Beam Supported at Both Ends, and Loaded at the Centre (12).

At any point in the beam,

$$S H = \frac{W}{2}.$$

DIAGRAM.—In Fig. 30, the shearing forces (35) for this case are given by the vertical distances between CD and AB , AC and BD being each $= \frac{W}{2}$, ... (43.)

41. Beam Supported at Both Ends, and Loaded with a Concentrated Weight at any Point (13).

Let a and b be the distances of W from the supports A and B respectively.

$$S H_A = P = W \frac{b}{l} = S H_x, \text{ constant between } A \text{ and } W.$$

$$S H_x = P' = W \frac{a}{l} = S H_x, \text{ constant between } B \text{ and } W.$$

DIAGRAM.—In Fig. 30, the shearing forces (35) for this case are given by the vertical distances between AB and $RPQS$, W being supposed at Q .

$$AR = W \frac{b}{l}.$$

$$BS = W \frac{a}{l} \dots (43.)$$

42. Beam Supported at Both Ends, with a Concentrated Load moving in either Direction (17).

$$\left. \begin{aligned} S H_x &= W \frac{x}{l} \\ \text{Or, } &= W \frac{(l-x)}{l} \end{aligned} \right\} \text{The greater of these two values to be taken.}$$


$$S H_A = S H_x = W.$$

DIAGRAM.—In Fig. 30, the verticals AE and BF at either extremity of

the beam are made equal to W ; E joined to B , and A to F . The vertical distances between $E K F$ and $A B$ give the shearing forces.

43. Diagram of the Shearing Forces in a whole Beam with a Concentrated Load.

Fig. 30.



AB is the beam. AE and BF are equal to W .


When W is in the centre of the beam (K), the shearing force for the whole length of the beam equals $\frac{W}{2}$ = the vertical distance between CD and AB .

When W is at any other point (Q), the shearing forces in the two segments, RP , QS , are inversely as the lengths of the segments. The vertical distances between AB and $RPQS$, give those shearing forces.

When W rolls from end to end of the beam, the shearing forces are as the vertical distances between AB and EKF . The points P and Q will always be points in either EB or AF .

44. Beam Supported at Both Ends, and Loaded uniformly its entire Length (19).

Fig. 31.



$$SH_A = SH_B = P = P' = \frac{wl}{2}.$$

$$SH_x = w \left(\frac{l}{2} - x \right).$$


The sign of the result to be disregarded.

At mid-span, $SH = 0$.

DIAGRAM.—Let AB be the beam (35). At A and B erect AC and BD , each equal to $\frac{wl}{2}$. Join C and D to the mid-span, E . Then the vertical distances between AB and CED will give the shearing forces.

45. Beam Supported at Both Ends, subject to a Distributed Load advancing from either Support* (20).

Fig. 32.



The greatest shearing force will be developed at the point of junction of the loaded and unloaded segments; in which case let x also represent the length of the load. Then,

$$\left. \begin{aligned} SH_x &= \frac{w(l-x)^2}{2l} \\ \text{Or,} \quad &= \frac{wx^2}{2l} \end{aligned} \right\} \begin{array}{l} \text{The greater of the two values to be} \\ \text{taken.} \end{array}$$

$$SH_A = SH_B = \frac{wl}{2}.$$

$$\text{At mid-span, } SH = \frac{wl}{8}.$$

* As in the case of a railway train crossing a bridge.

DIAGRAM.—Let AB be the beam (35). At A and B erect AC and BD respectively, each equal to $\frac{wl}{2}$. Draw the semi-parabola, CEB (232), whose vertex is at B , and ordinate $BD = \frac{wl}{2}$. Draw the semi-parabola AED corresponding exactly to CEB . Then, as the load advances from either pier (say A), the shearing force developed at the junction of the loaded with the unloaded apex will be represented by the vertical distances between AB and AED . When the load covers the whole span, the shearing forces will be as in (44).

As the load is liable to advance from the pier B as well as from A , the maximum shearing forces for all positions of the load will be given by the vertical distances from AB to CED .

46. General Formulæ for Determining the Reaction of the Supports, and the Shearing Forces in the case of Continuous Beams and Beams whose Extremities are Fixed, or subject to the Action of known Moments of Rupture (37).


Let AB be a beam, subject to the action of the moments M_A , M_B , and let the beam be uniformly loaded.

The notations as before.

$$P = \frac{wl}{2} + \frac{M_A - M_B}{l}.$$

$$P' = \frac{wl}{2} + \frac{M_B - M_A}{l}.$$

Fig. 33.



The shearing force at any point distant x from either pier, is found by subtracting ($w x$) from the re-action of that pier produced by the load between A and B .

The values of P , P' are the pressures on the piers produced by the load between A and B only. Should there be a load on the beam continued beyond these points, the pressures similarly found must of course be added to those above for the total pressures on the piers (162).

47. Beam Fixed at Both Extremities, and Loaded uniformly (25, 26).

$$S H_A = S H_B = \frac{wl}{2}. \quad S H_x = w \left(\frac{l}{2} - x \right).$$

Exactly the same as for (44).

DIAGRAM.—The same as in (44), which see.

48. Beam of Uniform Strength (165), supported at One End, and Fixed horizontally at the other, uniformly Loaded its entire Length (29).

$$\text{At the unfixed end, } S H_A = \frac{wl}{3}.$$

$$\text{At the fixed end, } S H_x = \frac{2wl}{3}.$$

$S H_x = w \left(\frac{l}{3} - x \right)$, x being measured from the unfixed end. The sign of the result to be disregarded.

DIAGRAM.—Let $A B$ (fig. 34) be the beam (35). At the unfixed end (A) erect $A C = \frac{w l}{3}$, and at the fixed end (B) erect $B D = 2 (A C)$. Join C and D to E , distant $\frac{1}{3} l$ from A , or half-way between A and the point of contrary flexure, f (23). The vertical distances between $A B$ and $C E D$ will give the shearing forces.

The length $A f$ is identical with $A f$ (fig. 22), and the length $f B$ with $f B$ (fig. 22).

49. Beam of Uniform and Equal Section, supported at One End and Fixed horizontally at the Other, uniformly Loaded its entire Length (28).

Fig. 34.



$$\text{At the unfixed end, } S H_x = \frac{3 w l}{8}.$$

$$\text{At the fixed end, } S H_x = \frac{5 w l}{8}.$$

$S H_x = w \left(\frac{3 l}{8} - x \right)$, x being measured from the unfixed end; and the sign of the result being disregarded.

DIAGRAM.—Let $A B$ be the beam (35). At the unfixed end (A) erect $A C' = \frac{3 w l}{8}$, and at the fixed end (B) erect $B D' = \frac{5 w l}{8}$. Join C' and D' to E' , distant $\frac{1}{3} l$ from A , or mid-way between A and the point of contrary flexure, f' (23). Then the vertical distances between $A B$ and $C' E' D'$ will give the shearing forces.


The length $A f'$ is identical with $A f$ (fig. 21), and $f' B$ with $f B$ (fig. 21).

50. Continuous Beams with Fixed uniformly Distributed Loads (30).

If the spans be rightly proportioned (see foot-note, (*) p. 12), case (48) or (49) will apply to the outer spans, and case (47) to the remaining spans.

51. Beam of Uniform Strength (165) for the maximum strains, continuous for Two equal Spans, subject to a Fixed Load uniformly Distributed, and also to a Moving Load (32). (See 113A.)

Fig. 35.



The maximum shearing force at either abutment will obtain when its span only sustains the moving load.

The maximum shearing force at the entre pier will obtain when both spans are fully loaded.

The total maximum pressure on the centre pier, when both spans are fully loaded, will be twice the above maximum shearing force at the pier.

Let w' = the moving load per unit of length, the other notations as before. The following are the maximum values* :—

$$\text{At either abutment,} \quad S H_A = \frac{l}{12} (4w + 5w'), \text{ or}$$

$$\text{At the centre pier,} \quad S H_C = \frac{2l}{3} (w + w'), \text{ or}$$

At any other point (x),

$$\begin{aligned} S H_x &= \frac{l}{12} (4w + 5w') - x(w + w'), \\ \text{Or,} \quad &= \left(\frac{l}{3} - x \right) (w + w'), \\ \text{Or,} \quad &= \frac{l}{12} (4w - w') - wx. \end{aligned} \quad \left\{ \begin{array}{l} \text{The greatest value to be} \\ \text{taken; } \dagger x \text{ to be mea-} \\ \text{asured from the abut-} \\ \text{ment, and the sign of} \\ \text{the result to be disre-} \\ \text{garded.} \end{array} \right.$$

As the load may be supposed to advance from either abutment right across the beam, *an addition must be made* to the above values for $S H_x$ † being equal to $\frac{w'l}{8}$ when x is about equal to $\frac{1}{2}l$, and gradually diminishing as x gets more or less than $\frac{l}{3}$. (See the dotted curve in the diagram.)

DIAGRAM.—Let A C (fig. 35) be one span of the beam (35). At the abutment A erect $AD = \frac{l}{12} (4w + 5w')$. Make $AE = \frac{l}{3} (w + w')$. At C erect $CF =$ twice AE . Join E and F to M, distant $\frac{1}{2}l$ from A. Through D draw DN parallel to EM . Sketch in a curve similar to that (dotted) in the figure, making an additional depth to the ordinates, at the point of minimum shearing force, of $W' \frac{l}{8}$. † Then the vertical distances between A C and D S T F may be considered to give the maximum shearing force for either span.

52. Beam of Uniform Strength (165) for the Maximum Strain.
Continuous over two or more Piers, subject to a Fixed Load uniformly Distributed, and also to a Moving Load (33). (See 113A.)

* Approximate values corresponding with the moments of rupture §2. (See 31.)

† The last of the three values is the shearing force in one span, when the other only is fully loaded, the addition however made for the load being a moving one will entirely cover it.

‡ An exact expression for the value of the shearing forces developed by a load gradually advancing across a continuous beam of (about) uniform strength, would, even if it could be obtained, be most complicated. The process here suggested, however, though necessarily only approximate, may be regarded as practically safe.

The maximum shearing force *at any pier* (B or C) will obtain simultaneously with the maximum moment of rupture over that pier (33).

For any inner span,

$$S H_s = S H_c = l \left(\frac{w}{2} + \frac{2 w'}{3} \right).$$

$$S H_x = l \left(\frac{w}{2} + \frac{2 w'}{3} \right) - x (w + w'),$$

x being measured from the nearer pier.

For either outer span—

At either abutment,

$$S H_a = (w + w') \frac{l'}{2} - \frac{3 w \cdot l'^2}{32 l'}.$$

At the pier,

$$S H_s = \frac{3}{8} (w + w').$$

At any other point,

$$\begin{aligned} S H_x &= \left(\frac{l'}{2} - x \right) (w + w') - \frac{3 w l'^2}{32 l'} \\ \text{Or,} \quad &= (w + w') \left(\frac{l'}{3} - x \right). \end{aligned} \quad \left\{ \begin{array}{l} \text{The greater of these values to be taken, and} \\ x \text{ to be measured from the abutment.} \end{array} \right.$$

At the middle of the inner spans, and at $\frac{1}{3} l'$ from the abutments in the outer spans, the values obtained by the above formulæ must be increased by $\frac{w l}{8}$ and $\frac{w l'}{8}$ respectively; and this addition, gradually diminished, must be made for some distance *on either side* of those points (see foot note (§), p. 21) as shown in the diagram below.

If the beam be continuous for three spans only, the above formulæ must be modified as directed on the next page.

Fig. 36.

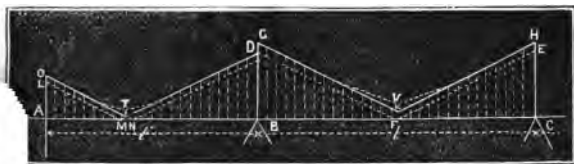


DIAGRAM.—Let A B C be part of the beam (35). For any inner span l .—At B and C erect B G and C H, each $= \left(\frac{w}{2} + \frac{2 w' l}{3} \right)$. Make B D and C E each $= \frac{l}{2} (w + w')$. Join D and E to the mid-span, and draw G K and H K parallel to D F and F E respectively. For either outer span (as l'):—At B erect a perpendicular $= \frac{2 l'}{3} (w + w')$, which, if $l' = \frac{3 l}{4}$, will

coincide with B·D. At A erect $AL = \frac{1}{2} DB$. Join D and L to M, distant $\frac{1}{2} l'$ from A. Make $AO = \frac{l'}{2} (w + w') - \frac{3 w l^2}{32 l}$. Draw ON parallel to LM. At T and K sketch in curves,* similar to those in the figure, giving additional depths to the ordinates there of $\frac{w' l'}{8}$ and $\frac{w' l}{8}$ respectively. Then the vertical distances between OTD and AB may be considered to give the maximum shearing forces for either outer span, and those between G·V·H and BC for the remaining spans.

If the beam be continuous for three spans only, the value given in the formulæ for SH_a and SH_c , and in the diagram for BG and CH, must be altered to $\frac{(13 w + 16 w') l}{32} + \frac{L^2}{8 l} \left(\frac{2 w}{7} + \frac{w'}{2} \right)$; and further, the value given to SH_b for the inner span must be altered to $= SH_b - x (w + w')$, in which latter expression SH_b must have the value just assigned to it.

$$L = \frac{l + l'}{2}.$$

* See foot note (†), p. 21.

FLANGED GIRDERS, ARCHES, AND SUSPENSION BRIDGES.

53. In the **Design of a bridge, girder, or other similar structure**, certain parts of which are supposed to resist *certain strains*,* the various processes are followed out in a progressive order. When the data do not extend beyond the amount and nature of the load, and the width, &c., of the obstacle to be crossed, the processes will be as follows:—

- I. *Determination of the kind of bridge or girder (54).*
- II. *Determination of the general cross section, and major proportions of the structure (55—58). These enable—*
- III. *An outline sketch to be drawn (59).*
- IV. *Approximate estimation of the weight of the structure (60, 61).*
- V. *Calculation of the strains on the various parts (62—162) (which strains must be figured on to the outline sketch), at as many points as will be found necessary for the accurate—*
- VI. *Determination of the amount of material to resist the strains on the various parts (163—173).*
- VII. *Distribution of the material in the various parts into a form of cross section best suited to resist the kinds of strain brought upon them (174—190), having regard to—*
 - a. *facility of construction.*
 - b. *adaptation of one part to another in contact with it.*

SECTION I.

DETERMINATION OF THE NATURE, PRINCIPAL DIMENSIONS, ETC., OF THE BRIDGE OR GIRDER.

(Embodying processes, I, II, III, above.)

54. The first operation (I, 53), that of determining the kind of bridge or girder, must be left entirely to the discretion of the designer; at least no rules can be laid down for his guidance: the several conditions which would influence the decision, such as nature of site, obstacles to be crossed, facilities of construction, &c., being infinitely diversified.

55. The general cross section of a bridge must also be left to the experience and discretion of the designer, as no definite rules can be given

* The system of regarding particular members or parts of a girder as resisting the particular strains for which they are adapted, and these alone, is perhaps the most generally received. (See 62 and 191.)

upon the questions of the relative advantage and economy of the many systems which have been adopted and suggested.

GENERAL PROPORTIONS.

56. The central depth of straight independent girders may be made from $\frac{1}{15}$ to $\frac{1}{12}$ of the span. The greatest economy of material is perhaps obtained at $\frac{1}{12}$.

For continuous girders, or girders fixed at the ends, the depth may vary from $\frac{1}{12}$ to $\frac{1}{20}$ of the span.

57. Where convenient it is in most cases advisable that girders with fixed loads and with oblique or curved flanges or booms, should have their depths varying as the moments of rupture (1), that is, as the ordinates in the diagrams (5) given for several cases (7—33) of loading, &c. (76).

It follows from the above, that bow-string girders, arches, suspension chains with stationary uniformly distributed loads, should (the latter will nearly) have the form of a *parabola* (232).

58. Diagonal bracing will, as a rule, be most economically disposed at an angle of 45° with a vertical.

59. The design having, as supposed, advanced thus far, it is advisable that a skeleton elevation of the bridge or girder be drawn to a moderately large scale, that the strains on the various parts about to be calculated may be figured thereon.

SECTION II.

CALCULATION OF THE STRAINS ON THE VARIOUS PARTS.

(Embodying Processes IV, V, p. 24.)

60. Approximate Estimation of the Weight of the Structure.

1st. If no other source of information be at hand* (60A), assume a probable weight from the data of experience.

2nd. Calculate a few sections by the formulæ, &c., given hereafter, on the supposition that the bridge or girder is loaded with the just-assumed weight uniformly distributed, and the maximum extraneous load that is to be brought upon it.

3rd. Make a second approximation of the weight from the few sections just calculated; allow a percentage for contingencies (which may vary from 5 to 25), and if the total be at all near the first estimate, it will generally be sufficiently correct to stand for the weight of the structure in the final calculation of the strains, &c.

* See B. Baker's diagrams and tables giving weights of girders up to 200 feet span.

60A. Approximate Weights of Wrought-iron Girder Railway Bridges.

Single Line of Way.

For	30	feet spans	5	cwt. per foot run.
"	60	"	6	" "
"	100	"	9	" "
"	150	"	12	" "
"	200	"	15	" "

61. *The weight of the beam, girder, &c., must always be introduced into the calculation for the strains.* It may generally be considered as a uniformly distributed (of course stationary) load. Where the load is stationary, and also uniformly distributed, (viz., cases 9, 19, 25—30, and 38, 44, 47—50), the unit of weight of the girder may be combined with that of the load proper. But in nearly all other cases it will be necessary to regard them separately.

FLANGED GIRDERS, WITH THIN CONTINUOUS WEBS.

Fig. 36A.



62. *Distinct Functions of the Flanges and the Web.* In pages 25 to 29 inclusive, the web is considered to take no part in resisting the *horizontal* strains (1), the whole of which will be provided for in the flanges.

Though this is not theoretically correct, the error is practically so small as to be disregarded with safety.

Neither are *horizontal* flanges considered to take part in resisting the shearing forces (1), the whole of which will be provided for in web (64, 80, 191).

Strains in Flanges Generally.

63. Flanges or parts of flanges, perpendicular to the action of the load on a girder, have to resist only the bending effect of the load, which depends on the moment of rupture (1).

64. When, however, a flange or part of a flange is not as just supposed, it suffers an additional strain, which is part or all (as the case may be) of the shearing force (1), the amount of additional strain depending on the inclination of the flange (75).

Thus in ordinary practical cases, where the action of the load is vertical, the strain on the flange increases the more it wanders from the horizontal position. The extra strain it suffers, however, modifies proportionally the strain on the web (80, 81).

65. Nature of the strains. At any vertical section of a girder, the strains in the two flanges are of different kinds (4) :—

1. When the action of the load tends* to make the beam *convex* on its *lower* surface, then—

the upper flange is in compression (168) ; and
the lower flange is in tension (167).

2. When the action of the load tends* to make the beam *convex* on its *upper* surface, then—

the upper flange is in tension, and
the lower flange is in compression.

Strains in the Web Generally.

66. The strains borne by the web are the shearing forces (1, 34), due to the transmission of the vertical pressure of the load to the points of support. Their amount (and sometimes manner of action) are greatly modified by the longitudinal form of the adjoining flanges (64, 80).

GIRDERS WITH PARALLEL STRAIGHT FLANGES.

Flanges.

67. To find the Amount of Strain on either Flange at any vertical section (68),—Divide the Moment of Rupture, as found from the formulæ or diagrams, pp. 2 to 15, by the depth of the girder, *i. e.* by the distance between the centres of gravity of the sections of the two flanges.

68. At any vertical section, the strains on the two flanges are equal in amount, but opposite in their nature (65).

69. The strains in the flanges will vary throughout as the moments of rupture (1, 2), and therefore as the ordinates in the diagrams (5).

70. By DIAGRAM.—If the ordinate, in the diagram for the case (5), at any point of the girder, be made to represent on a scale of parts the strain on the flanges at that point, *the strain at any other point may be measured off from the diagram.*

71. The strains are either direct tension (167), or direct compression (168).

* The action of the load on a girder supported at both ends, and having its lower surface concave (see Plate I.) will lessen the concavity, and so *tend* to cause convexity.

Web.

72. The Strain upon any Vertical Section of the Web is equal to the "Shearing Force" (1, 34) developed at that section. For the value see (34—52).

73. If the girder have more webs than one,* the strains as found by (72) must be divided by the number of webs for the strain in each.

74. The nature of the strain in the web is a shearing (proper) (171).

GIRDERS WITH CURVED OR OBLIQUE FLANGES.

Flanges.

75. To find the Amount of Strain on either Flange at any point, —Divide the moment of rupture (formulae and diagrams, pp. 2 to 15) by the depth of the girder, the vertical distance between the centres of gravity of the sections of the two flanges, and multiply the quotient by the secant (126) of the angle which the flange, or a tangent to it at the point, makes with a horizontal.†

76. If the depth of the girder vary throughout as the moments of rupture (1, 57), i. e., as the ordinates shown in the diagrams for those moments (5), then

(a), the strains in the flanges will vary as the secants (see 77, 126) of the angles of inclination to the horizon. So that

(b), if the strain at a horizontal part‡ be known, the strain at any other part may be found by multiplying the former by the secant (see 77, 126) of the angle of inclination of the latter.

77. NOTE. For the operation of multiplying by the secant of an angle there may be substituted a geometrical process. Let ABC be part of a curved flange. Let the value of




Fig. 37.

($\frac{\text{Moment of Rupture at B}}{\text{Depth of Girder at B}}$) be represented to scale by the horizontal line DE, measuring it from some point (E) on the tangent (FE) to ABC at B. If DF be drawn vertical, i. e., perpendicular to DE, then FE will = $\frac{\text{Moment of Rupture at B}}{\text{Depth of Girder at B}} \times \secant DEF$. (DEF being the angle of inclination of the flange at B.)

78. The strains in the flanges are either direct compression (168), or direct tension (167).

Web.

79. In girders with oblique or curved flanges, the strains in the web are affected by the inclinations of the flanges.

* As in "box" or "tubular" girders.

† This is but a close approximation to the truth. See also foot-note (i), p. 61.

‡ Which will generally be at the centre of whole girders.

80.* For the Strain on the Web at any Vertical Section.—Find the shearing force (1) developed at that section (34), and modify it as directed below.

If at the vertical section the flange in compression (65, 78) be inclined down $\left\{ \begin{smallmatrix} \text{to} \\ \text{from} \end{smallmatrix} \right\}$, or the flange in tension be inclined down $\left\{ \begin{smallmatrix} \text{from} \\ \text{to} \end{smallmatrix} \right\}$, the nearest point of support, $\left\{ \begin{smallmatrix} \text{subtract} \\ \text{add} \end{smallmatrix} \right\}$ the vertical component of the strain in that flange $\left\{ \begin{smallmatrix} \text{from} \\ \text{to} \end{smallmatrix} \right\}$ the shearing force. The sign of the result need not here be regarded.

If S = strain in flange,

θ = angle which the flange or a tangent to it makes with a horizontal line, as DEF (fig. 37); then,

$S \times \sin \theta$ = the "vertical component referred to above."

81. By Construction.—Draw a vertical AB = shearing force. If the flange in *tension* (65, 78) be inclined down *from*, or the flange in *compression* be inclined down *to* the nearest point of support (we will suppose the latter case),—Draw CD representing both in direction and amount the strain in that flange, so that a horizontal drawn through D shall cut A . Then CA will be the vertical component of the strain in CD .

Again, if the flange in *compression* be inclined down *from*, or the flange in *tension* be inclined down *to* the nearest point of support (we will suppose the latter case),—Let it be represented by EF . Obtain its vertical component EB , which should be added to AB , in the same way that AC was subtracted from it. Then CE will be the total resulting strain on the web. Should the amount to be subtracted exceed the sum of the original and that added to it, the difference must still be taken.

Fig. 38.



81A. The strain taken must be that obtaining when the shearing force being considered is developed. For instance, with a load gradually advancing across a beam supported at both ends, the maximum shearing force will be developed at the centre, when the load covers only half the span (45), at which time the moment of rupture, from which the flange strain is found, will be that given by (20), and not by (19), which latter would be used when making the calculation for the flanges.


82. If the girder have more webs than one, the strain as found by (80 or 81) must be divided by the number of webs for the strain in each.

83. NOTE. It will obviously follow, from the above rules, that in girders with curved or oblique flanges, the maximum strain in the web does not necessarily occur when the maximum shearing strain is produced.

* The rules, &c., given here are not advanced as mathematically accurate, as there is much connected with the effect of curvature in the flanges on the strains in the web that has not been satisfactorily determined.

GIRDERS WITH WEBS OF OPEN BRACING.

Fig. 38A.



GENERAL RULES FOR OPEN-WEBBED GIRDERS.

Booms.

84. At any vertical section of a girder the strains in the two booms are opposite in kind. (See 65, which also applies here.)

85. When the girder is loaded at the joints (87), the strain in any bay of either boom is constant throughout its length, and acts only in the direction of its length.

86. A bay cannot be in direct compression and tension simultaneously (87).

87. Whenever the load or part of the load upon a girder is situated between the two extremities of any bay, that bay must be considered as a loaded beam, and the strains in it calculated and provided for accordingly.

Web.

88. The strain on any brace is constant throughout its length, and acts only in the direction of its length.

89. A brace cannot suffer compression and tension simultaneously.

90. If two or more strains, not all of the same kind, be acting upon a brace at the same time, the total actual strain in the brace will be equal to the algebraical sum of those strains.*

91. The Nature of the Strains in the diagonal braces of girders symmetrically loaded will be—

(a) in all bars inclined down to the nearest support—*compression* (168).

(b) in all bars inclined down from the nearest support—*tension* (167).

92. If the girder be not symmetrically loaded, some of the bars will be subject to strains of a nature contrary to that stated in (91).

93. Counter Strains.—With a moving load, some of the bars will be subject to strains both of compression and tension, depending on the position of the load and the proportion it bears to the weight of the girder. The strain not according with (91) is known as the “counter strain.”

NOTE. (92) and (93) do not apply to semi-beams or cantilevers.

* Equal to the difference between the sum of the tensile and the sum of the compressive strains.

94. If the load be brought only upon one boom,* any two bars forming an apex on the unloaded boom may be termed a "pair;"† if these make equal angles with the boom they are equally strained.

95. If both booms be loaded, then—

(a) in a warren (zig-zag or single triangle) girder there will be no "pairs."‡

(b) in a straight lattice‡ girder, if the load be equally divided between the two booms, bars intersecting at the mid-depth of the girder, and making equal angles with the booms, may be termed a "pair," and are equally strained.

**CALCULATION BY MEANS OF THE MOMENTS OF RUPTURE (pp. 2 to 15)
AND THE SHEARING FORCES (pp. 16 to 23).**

96. Loads regularly concentrated at the apices of the diagonals, may be considered as uniformly distributed loads (w , in 2 and 34) when the moments of rupture (1) and shearing forces are being determined, so long as the concentrated load at any apex is equal to half the sum of the supposed uniformly distributed load on the two adjoining bays. Thus the weight at A (Fig. 39) must be $= \frac{1}{2}$ that at B, before the load can be considered as uniformly distributed. If the uniformly distributed load were on the bottom boom in the fig., the weights concentrated at C and D would be equal.

Fig. 39.



GIRDERS WITH PARALLEL STRAIGHT BOOMS.

97. NOTE. As the depth of the girder (a constant divisor in calculating the strains from moments) is uniform, the diagrams (4, 5) may be considered to give strains instead of moments, if the vertical scale be multiplied by the number of units of length in the depth of the girder.

Thus, suppose the diagram had been drawn to a vertical scale of six tons to the inch, and that the depth of the girder was two feet (the foot being the lineal unit used in the case), then the ordinates in the diagram may be considered to give actual strains instead of moments if they be read off on a scale of three tons to the inch; three tons to the inch being a scale twice as large as six tons to the inch.

98. NOTE. The Depth of the Girder is the distance between the centres of gravity of the cross sections of the booms, and must always be expressed in the same units of measurement as the length of span (2, 34).

99. Warren Girder (single triangle), isosceles Bracing, Loaded on One Boom Only—for any case given under Moments of Rupture, pp. 2 to 15.

Booms. §—For the strain in any bay (84—87) of the *unloaded* boom,—Divide the moment of rupture (M_x in the formulæ, or the ordinate in the

* Verticals from loaded bays to opposite apices may be considered to distribute the load between both the booms.

† When two bars are said to form a pair, it is meant that the same amount of the vertical pressure of the load is transmitted through them both.

‡ Any girder whose web consists of more than one system of triangulation is considered a "lattice."

§ See also 97.

diagram, for the case 7 to 33) at the opposite apex, by the depth (98) of the girder. For any bay (84—87) of the *loaded* boom, take the arithmetical mean (half the sum) of the strains in the two opposite bays of the unloaded boom.

WEB.—For the strain on any pair (94) of diagonals forming an apex on the unloaded boom,—Multiply the shearing force ($S H_z$ in the formulæ, or the ordinate in the diagram, for the case 34 to 52), developed at the apex, by the secant of the angle which the brace makes with a vertical; or increase the shearing force (as above) in the proportion of the inclined length of the brace to its vertical depth. For the counter strains (93) from moving loads, see (100).

100. The Counter Strains (93) in girders not continuous will be given by the smaller value of the two shearing forces given in 42 or 45, or by the ordinates (35) to the lines (A K, K B. fig. 30, or A E, E B, fig. 32) in the diagrams which accompany those several cases; the values thus obtained being, of course, multiplied by the sect. (77, 126) of the angle between the brace and a vertical, and subject to indeed all the other stipulations made (under "Web") for the strains normal.

101. In *continuous girders with moving loads* the counter strains are indefinite, but may be supposed to act equal in intensity to the values allowed for the regular strains, and for some distance on either side of the point of minimum shearing force * (51, 52).

102. Warren Girder, isosceles or scalene Bracing, with the Load brought Equally upon Both Booms†—for any case given under moments of rupture, pp. 2 to 15.


Booms.‡—For the strain in any bay (84—87) of *either* boom,—Divide the moment of rupture (M_x in the formulæ, or the ordinate in the diagram, for the case 7 to 33) at the opposite apex, by the depth (98) of the girder.

WEB.—For the strain in any brace, multiply the shearing force ($S H_z$ in the formulæ, or the ordinate in the diagram, for the case 34 to 52), developed at the mid-length of the brace, by the secant (126) of the angle which the brace makes with a vertical; or increase the shearing force (as above) in the proportion of the inclined length of the brace to its vertical depth.

For the counter strains (93) from moving loads, see (100, 101).

103. Girder with One System of Vertical Struts and Inclined Ties, loaded either on the top or bottom, or both—for any case given under moments of rupture, pp. 2 to 15.

Fig. 40.



Booms.‡—For the strain in any bay (C D for instance) of *either* boom (84—87),—Divide the moment of rupture (M_x in the formulæ, or the ordinate in the diagram, for the case 7 to

* Actually there will be counter strains for a greater length of the several spans and there will be necessity practically to provide for them in, as their amount is always be exceedingly small near the piers compared with the other strains.

† This is accomplished when there are verticals at the unloaded apices.

‡ See also 97.

33) at the opposite apex B, by the depth (98) of the girder. The strain in any bay of the upper boom in a whole girder (A B, fig. 40, for instance,) will be equal to the strain in the bay (C D) of the lower boom on the mid-span side of the opposite apex; for the moment of rupture will be taken at the same point (horizontally considered) for both the bays. The bays C E and F G are unnecessary for an independent whole girder.

WEB.—Struts. If the load be only on the upper boom, the compression on any strut will equal the shearing force ($S H_z$ in the formulæ, or the ordinate in the diagram, for the case 34 to 53), developed at the middle of the adjoining bay on the far abutment side; * if only on the lower, then that at the middle of the adjoining bay on the near abutment side; and if equally on the upper and lower booms, then that developed at the strut itself.

Ties. For the tension on any inclined tie,—Multiply the shearing force (34) developed at its mid-length by the secant of the angle it makes with a vertical, or increase that shearing force in the proportion of the length of the tie to the length of a strut.

Counter Strains (93—101). In a girder with the bracing disposed similar to that in the figure, a moving load, or a load covering less than either half of the girder would produce tension in some of the verticals and compression in some of the diagonals (to estimate which see 100). This can be obviated by introducing other ties (as H C and H F) which will suffer the tension otherwise brought on the verticals. These ties would, however, be useless with a stationary symmetrical load.

104. Warren Girder with scalene Bracing, Loaded on one Boom—for any case given under moment of rupture, pp. 2 to 15.

Booms.†—For any bay (84—87) in the unloaded boom (C D, fig. 41, for instance),—Divide the moment of rupture (M_z in the formulæ, or the ordinate in the diagram, for the case 7 to 33) at the opposite apex (G), by the depth (98) of the girder.

The strain on any bay of the loaded boom (as E G, fig. 41) will bear the same relation to the strains in the opposite bays (H C and C D) as its apex does to their apices horizontally considered (that is, as the point F does to the points E and G). Therefore—

$$\text{Strain in EG} = \text{Str. in HC} + \frac{EF}{EG} (\text{str. in CD} - \text{str. in HC}). \quad (\text{See 105}).$$

WEB.—For the strain in a pair (94) of braces forming an apex on the unloaded boom,—Multiply the shearing force ($S H_z$ in the formulæ, or the ordinate in the diagram, for the case 34 to 53), developed at the middle of the loaded bay included between the bars, by the secants of the respective angles which they form with a vertical; or increase the shearing force (as above) in the proportion of the inclined length of the respective braces to their vertical depth.

For the counter strains (93) from moving loads, see 100.


105. Method of applying the Diagrams for the Moments of Rupture to the foregoing cases.†

* Or the "no abutment" side in a semi-beam.

† See also 97.

As before stated (96), loads which are in reality concentrated at the apices may be considered as uniformly distributed if they be such as a uniformly distributed load would bring on the apices in question.

Fig. 41.

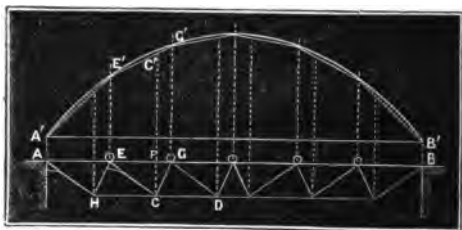

Place the diagram of the moments of rupture (1) for the case of loading, support, &c. (7 to 33) immediately above (or under), and drawn to the same horizontal scale as the skeleton elevation (53, 59) of the girder. (See fig. 41, in which the load is supposed to be uniformly distributed (96, 19) along the upper boom.)


Draw verticals right through the diagram at each of the loaded apices, whether on one or both booms (as E E' and G G' fig. 41.) If the lines to or from which the ordinates in the diagram are supposed to be taken be curved, draw chords to that curve at the intersections of the verticals just drawn with that curve (as in fig. 41.) A polygon will be thus formed, and the strain on any bay of either a loaded or unloaded boom will be given (97) by the ordinate to that polygon taken at the opposite apex. (See also 106.)

For the diagonals the shearing forces may be taken directly from the diagram for the case (34 to 52) drawn to a large scale (35), subject to the modifications given under "Web" in the cases above.

106. NOTE. If all the lines in the diagram for the moments of rupture, to or from which the ordinates are directed to be taken, be *straight*, then the strain in any bay of *either* boom, whether *loaded* or *unloaded*, may be found from the ordinate taken at the opposite apex, by dividing the value of that ordinate by the depth of the girder (unless 97 be complied with, when the latter operation must, of course, be omitted).

107. Lattice Girder without a central bay, and if of more than two systems of triangles then with a complete system of triangulation in the half span (as A B C D E F G), but any number of intermediate systems loaded uniformly on one boom for an equal distance on either side of the mid span (see 110): may be applied also to cases of continuous girders (30—33).

Fig. 42.



BOOMS.—Place the diagram (5, 6, 97) for the moments of rupture (1) for the case above (or below) the outline sketch of the girder (59) as in fig. 42.

Draw chords and tangents (as shown in fig.) at points (C' E' G') corresponding with the divisions made by the "primary

triangles." Two polygons will thus be formed, one by (or including*) the

* When (21) is applied the load being centrally situated, the chords and tangents will of course extend only along the parabola C E D (fig. 15).

chords, another by (or including*) the tangents. For the strain in any bay of the *unloaded* boom take the ordinate to the *circumscribed* polygon,* at the centre of the bay; and for any bay (as E H) of the *loaded* boom take the ordinate to the *inscribed* polygon* at the centre of the bay. If the ordinates represent the moments of rupture (4, 5, 97), divide this value by the depth (98) of the girder.


WEB.—Divide the load per unit of length (34) by the number of systems of triangles (= the number of bays in the base of one of the primary triangles) for a new unit of weight, w ; thus $\frac{w}{n} = w_1$ or $\frac{w'}{n} = w'_1$. Then for the strain on any pair (95) of lattice bars,—Multiply the shearing force (S H_z in the formulæ, or the ordinate in the diagram—34, 35,—calculated or constructed with the new unit w_1 , or w'_1), developed at their apex by the secant of the angle they make with a vertical, or increase that shearing force in the proportion of the inclined length of the bar to its vertical depth.

106. Any Lattice Semi-girder loaded on One Boom only.

BOOMS.—If the load be concentrated, see 110. If distributed, place the diagram for the moments of rupture (4, 5) immediately above (or below) the outline sketch of the girder (59).

Fig. 43.

Trace out the system of triangulation which terminates fairly at the extremity of the girder (see the thick lines in the fig.) To the curve of moments (4, 5) draw chords and tangents at points (E', D') corresponding to the divisions made by the triangles just traced out (D, E, fig. 43). If necessary for the construction, the diagram may be continued into the abutment. Two polygons will thus be formed, when, whatever be the number of systems of triangulation,—For the strain in any bay (84—87) of the *unloaded* boom take the ordinate, at the centre of that bay, to the *circumscribed* polygon; and for any bay of the *loaded* boom, to the *inscribed* polygon. If the ordinates represent the moments of rupture (4, 5, 97), divide their value by the depth of the girder (98).



WEB.—If the load be concentrated, see (110). If distributed, divide the load per unit of length (w) by the number of systems of triangles (= the number of bays in the base of a primary triangle (4 in fig. 43) for a new unit of load ($\frac{w}{n} = w_1$). Then for the strain on any pair (95) of braces forming


an apex on the unloaded boom,—Multiply the shearing force (S H_z in the formulæ, or the ordinate in the diagram for the case, calculated or constructed with the new unit w_1 —34, 35), developed at their apex, by the secant of the angle which they (each) make with a vertical, or increase the shearing force (as above) in the proportion of the inclined length of the brace to its vertical depth.

* See note, p. 34.

109. Lattice-Girder, if whole, and of more than two systems of triangles, then not without a central apex on one or other of the booms (see fig. 44), loaded uniformly and equally on both the Booms for an equal Distance on either side of the Mid-span, may be applied to continuous girders (30—33).

BOOMS.—Place the diagram (4, 5) of the moments of rupture (1) immediately above (or below) the outline sketch (53, 59) of the girder (as in the fig., where the load is supposed to extend over the whole length of the girder).

Fig. 44.



Where the line to or from which the ordinates are taken is curved, draw chords to it at points (E' F' G' C') corresponding to the several apices (on both booms) of the system of triangulation which has an apex at the mid span (E F G C in fig.) For the strain in any bay (84—87) of either boom, take the ordinate to the polygon,* thus formed, at the centre of that bay. If the ordinates represent the moments of rupture (4, 5, 97), divide their value by the depth of the girder.

WEB.—Divide the load per unit of length (w) by the number of systems of triangulation (= the number of bays in the base of one of the primary triangles,—3 in fig. 44) for a new unit of load ($\frac{w}{n} = w_1$). Then for the strain in any lattice bar, or pair† of bars. Multiply the shearing force (S.H., in the formulæ, or the ordinate in the diagram for the case—34, 35), developed at its or their mid-length, by the secant of the angle it or they (each) make with a vertical, or increase the shearing force (as above) in the proportion of the inclined length of brace to the vertical depth.

109A. If there be only Two Systems of Triangulation. Then for the strain in any bay (84—87) of either boom. Take the arithmetical mean between the moments of rupture at the two ends of the bay (p and q), and divide it by the depth of the girder.

$$\text{Strain in any bay} = \frac{M_p + M_q}{2d}.$$

The chords in the diagram will, however, give the same result.

110. Concentrated Loads on Lattice Girders. If a lattice girder be subjected to the action of a concentrated load at any apex, as at D (fig. 42), the system of triangles upon one apex of which the load is situated (A B C D E F G, &c.) should be considered as constituting the sole web of the girder—that is, as far as the concentrated load is concerned, for there is also the distributed weight of the girder (61). The strains from the concentrated load might be calculated as if the girder were a warren, and as if the intermediate bracing did not exist. Indeed, to introduce other systems of triangles for a stationary concentrated load would be an error in design, unless the boom upon which the load is placed be made sufficiently rigid to distribute part of the pressure upon adjacent intermediate apices, in which case the strains would be very indefinite.

* If it be an application of case (91) the lines A F and G B (fig. 15) must be considered to form part of the polygon.

† There will be no pairs (95), unless the number of systems of triangles be even

GIRDERS WITH CURVED OR OBLIQUE BOOMS.

111. Any Curved or Oblique whole or Semi-girder with a Single-triangular Web, loaded on One Boom.* (This will include many roof principals, bow-string girders, bent cranes, &c.)

BOOMS.—If alternate braces be vertical, then for the strain in any bay of *either* boom; if not, then for the strain in any bay of the *unloaded* boom *only*,—Divide the moment of rupture (M_r in the formulae, or the ordinate in the diagram (4, 5), for the case 7 to 33) at the opposite apex by the length of the perpendicular let fall from that apex on to the bay. For the strains in the *loaded* bays, when all the braces are inclined, the best way is by the diagram as follows. Place the diagram of the moments of rupture, immediately above (or below) the outline sketch (53, 59) of the girder. If the lines in the diagram to or from which the ordinates are directed to be taken be curved, draw chords at points corresponding to the position of the apices in the *loaded* boom. Then for the strain in any bay of the *loaded* boom, divide the value of the ordinate to the just-formed polygon, taken at the opposite apex, by the length of a perpendicular let fall from that apex on to the bay (191). (See 154.)

WEB.—For any brace, first determine the shearing force (34), acting at the middle of the bay on the loaded boom, which forms part of the same triangle with the brace in question. Next, find the vertical components (80, 81) of the strains in those bays which are opposite sides of a quadrilateral figure, whose diagonal is the brace in question. If either of these bays be part of a boom in tension, and sloped as a strut (91), or part of a boom in compression and sloped as a tie (91), *add* the vertical component of the strain in it (already found) to the shearing force first obtained. Again, if either of the two same bays be part of a boom in compression and sloped as a strut, or part of a boom in tension and sloped as a tie, *subtract* its vertical component (already found) from the result of the last operation (the addition, if any). The total resulting quantity must then be multiplied by the secant of the angle the brace makes with a vertical, or increased in the proportion of the inclined length of the brace to the vertical distance between its ends. *If the sign of the result be negative (—),* it shows that the nature of the strain on the brace is opposite to that which its position would have indicated according to the general rules (91). *If the brace be horizontal,* the shearing force must be disregarded, and the horizontal components of the bays substituted for their vertical components in the process detailed above. The strain in a horizontal bay can have no vertical component.

112. Any Curved or Oblique whole or Semi-girder with a single triangular Web, loaded equally on Both Booms.

BOOMS.—For the strain in any bay of *either* boom,—Divide the moment of rupture (M_r in the formulae, or the ordinate in the diagram (4, 5) for the case 7 to 33), taken at the opposite apex, by the length of a perpendicular let fall from that apex on to the bay. (See 154.)

WEB.—As in the last case, excepting that the shearing force must be taken at the mid-length of a line joining the centres of the bays, which are two opposite sides of a quadrilateral whose diagonal is the brace.

* See foot note (*), p. 31.

113. For Continuous Girders, and Girders fixed at the Ends, the foregoing methods may be used in connection with cases 24 to 33 and 46 to 52, provided that the conditions stated in the latter and below (113A) are complied with.

113A. Wherever there is a negative moment of rupture at (or for safety in practice near) the abutments, the girder should be anchored down at its extremities. (See foot notes, pp. 13 and 15.)

114. Fixing the Points of Inflexion of Continuous Girders.—The points of inflexion (93) may be practically fixed at any part of a continuous girder subject to a moving load, by severing either boom at that part; if the upper boom, the parts thus severed must be prevented from coming in contact. *The structure is thus resolved into a series of independent girders, the strains upon which can then be most readily calculated.*


Fig. 45.



EXAMPLE.—In the accompanying fig. (45), by severing (or really removing) the bays of the upper boom opposite C and D, A C and D B become virtually semi-girders, each having to sustain in addition to the distributed load upon its length, half the total load on C D, suspended at the extremity (11, 30). C D is simply an independent girder supported at both ends.

115. The points of inflection may be considered as fixed in those continuous girders, and girders fixed (or tied back) at the ends, whose depths vary as (or nearly as) the moments of rupture. The strains in these also may be calculated as if the several divisions were independent girders.

Fig. 46.



If the tension members running down from the towers (as in fig. 46) be made to act simply as suspension chains, the strains

on them may be obtained from 155 or 118.

ALCULATION BY THE COMPOSITION AND RESOLUTION OF FORCES.

(APPLICABLE TO ALL CASES OF OPEN-WEBBED INDEPENDENT GIRDERS.)


116. The following principles should be applied to the calculation of the strains on the various members of an open girder (discontinuous) by (1st) finding the reaction of the supports from any weight in the girder, and (2nd) tracing this reactionary pressure throughout the various parts.

117. Reaction of Supports. Let a and b equal the distances from the supports A and B, respectively, of the centre of gravity of a load (W) on a beam. Then,

$$\text{Pressure on A} = \text{Reaction of A} = W \frac{b}{l}.$$

$$\text{Pressure on B} = \text{Reaction of B} = W \frac{a}{l}.$$

Fig. 47.



In girders, properly so called, the supports are supposed to be capable of resisting vertical pressure only. Their reaction can then only be vertical, and this must be borne in mind.*

118. Composition and Resolution of Forces. a c acting at a given point (a), be represented both in direction and amount by the two adjacent sides (a b , a c) of a parallelogram, an equivalent force will be represented in both direction and amount by the diagonal (a d) of that parallelogram.

If two forces (a b and

Fig. 48.



The converse of this is also true.

119. If three forces, acting at a given point, be in equilibrium (balance), their direction and amount will correspond to the three sides of a triangle, if any two of which be given, the third may be found. This triangle is nothing more than a b d or a c d , fig. 48.

120. If there be more than one concentrated load on a girder, two courses may be followed :

The reactions and the strains produced by each weight separately may be found, and the algebraical sum (see foot note, p. 80) taken ; or,

The reaction of the piers from the whole load may be worked towards the mid-span, the downward pressures of the several weights (when they are met with), being compounded with the other pressures during the progress. See Example (122).

The first should be adopted when the load is variable—for then the maximum resulting strains of either kind on any member may be found (136) ; the second when the load is stationary.

EXAMPLE—

Strains in a Bent Girder (Roof Principal).—Plate I.

121. Calculation by the Moments of Rupture (1 to 33) and Shearing Forces (34 to 52).

A F K is half of a bent girder whose clear span is 80 feet. The lower boom consists of chords to a curve of 96 feet radius ; and the upper, chords to a curve of 67 feet radius. The load is considered as uniformly distributed (regarded horizontally) on the upper boom, and = 8 tons = 1 ton (w) per foot of span. The braces are alternately vertical and inclined. (See 111.)

* Where the structure abuts against the supports, and those supports are supposed to be capable of resisting the lateral pressure, the structure is virtually an arch, and the reaction of abutments must not be considered solely as vertical. (See 146.)

Strains in the Booms.—The strain in the upper boom is compressive, and in the lower tensile (§5). As the braces are alternately vertical and inclined (III), the strains in any bay of either boom will equal the moment of rupture (I) for the case (19) taken at the opposite apex, and divided by the depth of the girder taken as a perpendicular from the apex on to the bay. (See Plate I.)

The moments of rupture (M) may be obtained either from the formula $(M = \frac{wx}{2}(l-x))$ (2)(19), or, from a properly constructed diagram (4, 5).

The depths (as above) must be scaled from the outline sketch (53–59).

The diagram for the moments as given in 19 apply properly to the unloaded boom only; while for the loaded boom, an inscribed polygon is required (III), as shown in Plate I. But wherever the apices on one boom are vertically under (as in the present instance) or over those on the other boom, it will be evident that the only ordinates required from the polygon will be those taken to its angles, that is, to the very points where it coincides with the parabola: so that the polygon is unnecessary.

It will be seen that by drawing the lines of construction for the parabola, as dotted in on the Diagram, there is really no necessity to draw the actual curve. (See also note to 33, III.)

$$\text{Strain in any bay} = \frac{M}{d} = \frac{wx(l-x)}{2d} = \frac{\text{Diagram Ordinate}}{d}.$$

	By Formula.	By Diagram.
Strain in AB =	$\frac{.1 \times 5 \times 75}{2 \times 1.6}$	$= \frac{18.75}{1.6} = 11.7 \text{ tons.}$
„ BC =	$\frac{.1 \times 13.75 \times 66.25}{2 \times 3.9}$	$= \frac{45.63}{3.9} = 11.6 \text{ tons.}$
„ CD =	$\frac{.1 \times 23.25 \times 57.5}{2 \times 5.7}$	$= \frac{64.68}{5.7} = 11.3 \text{ tons.}$
„ DE =	$\frac{.1 \times 31.25 \times 48.75}{2 \times 6.9}$	$= \frac{76.17}{6.9} = 11.039 \text{ tons.}$
„ EF =	$\frac{.1 \times 40 \times 40}{2 \times 7.25}$	$= \frac{80}{7.25} = 11.03\frac{1}{2} \text{ tons.}$
„ AG =	$\frac{18.75^*}{1.9^\dagger}$	$= 9.8 \text{ tons.}$
„ GH =	$\frac{18.75^*}{2.0}$	$= 9.3 \text{ tons.}$
„ HI =	$\frac{45.63^*}{4.5}$	$= 10.1 \text{ tons.}$
„ IJ =	$\frac{64.68^*}{6.1}$	$= 10.6 \text{ tons.}$
„ JK =	$\frac{76.17^*}{7.08}$	$= 10.7 \text{ tons.}$

Strains in the Web.—The values of the Shearing forces (I, 34) may be obtained either from the formula for the case (44) or from a diagram (35), the

* The moments of rupture are the same as for the upper boom, as the apices are at the same horizontal distance from the supports.

† This "depth" is a perpendicular, let fall from B on to AG produced. (See Plate.)

triangle $A'B'C'$ (Plate I.) corresponding to ACE (fig. 31). The vertical components of the strains in the booms must be obtained (111) either by (99) multiplying such strains by the sines of the angles of inclination of the several bays (as the angle i ; D for the bay DE , Plate I.), or by a geometrical construction, as shown for the bays DE and IJ ; for the former, Dj is the strain in the bay, and Di the vertical component.

Strain in any brace = $\left\{ SH \pm (\text{vert. comp.}) \pm (\text{vert. comp.}) \right\} \sec. \theta$.

$$\begin{aligned} \text{Strain in } FK &= .437 - .85 &= -.413 \text{ tension.}^* \\ \text{" } KE &= (.437 + .46 - .85) \times 1.7 &= .114 \text{ tension.}^* \\ \text{" } EJ &= 1.3 + .46 - 2.6 &= -.82 \text{ tension.} \\ \text{" } JD &= (1.3 + 1.4 - 2.6) \times 2 &= .218 \text{ tension.} \\ \text{" } DI &= 2.3 + 1.4 - 4.3 &= -.7 \text{ tension.} \\ \text{" } IO &= (2.2 + 2.22 - 4.3) \times 3.5 &= .42 \text{ tension.} \\ \text{" } CH &= 3.07 + 2.22 - 6.2 &= -.93 \text{ tension.} \\ \text{" } HB &= (3.07 + 3.0 - 6.2) \times 9.5 &= -1.24 \text{ tension.} \\ \text{" } BG &= \text{Diff. bet. vert. comp. of } AG \text{ and } GH. \\ &= 3.0 - 3.7 = -.7 \text{ tension.} \end{aligned}$$

122. Calculation by the Composition and Resolution of Forces (116—120).

For the data see 121. The weights (125) on the several apices of the upper boom must be considered as half the load on the adjacent bays, the load being horizontally uniformly distributed. Thus at B will be $(2.5 + 4.375) \times 1$ tons = .687 tons; and on each of the remaining apices on the upper boom 8.75×1 = .875 tons. The sum of all these weights on the girder will be 7.5 tons, the other .5 ton being supported directly by the two piers (.25 ton on each, being half the load on the outer bay). The reaction (117) of either pier from the total load on

the girder will be $\frac{7.5}{2} = 3.75$, and this must be worked up to the centre by the application of (118 or 119).

At pier A (Plate I.) draw a perpendicular ($A b$) = the reaction of A as above. Produce AB to a , and through b draw $b a$ parallel to AG . $A b a$ is the triangle of forces at A . Then (119) $b a$ is the tension in AG ; and $A a$ the compression in AB . Through a draw $a c$ parallel to GH ; then $a c b$ is the triangle of forces at G ; $c a$ is the tension in GH , and $c b$ that in GB . At B there are acting the compression in AB , the tension in GB , and the vertical pressure of the weight (.687 tons) at B , all of which are held in equilibrium by BC and BH . Let $A d$ = the sum of the tension ($c b$) in GB and the weight at B . Join d to a ; and $d a$ is the resultant of the three forces just named. To avoid confusion, repeat $d a$ at $a d'$. Through d' draw $d' e$ parallel to CB ; and through a , $a e$ parallel to BH . Then $e d'$ is the compression in BC ; and $a e$ the tension in BH . Transfer $a e$ to $c f$, and join f to a ; then $f a$ is the resultant of the strains in BH and GH ; which resultant may be resolved in the directions of HC and HI ; and so on to the centre.

The inexperienced practitioner will find it more convenient and safe to work by the parallelograms (118) instead of the triangles of forces, as the nature of the resulting strains is more clearly shown by the former, as there is also less liability to confusion.

METHODS OF CALCULATION FOUNDED ON THE PARALLELOGRAM OF FORCES.

123. General Law of the Strains in the Booms of Horizontal Straight Girders. The increment of strain developed at any apex in the

* See 111, "Web."

boom, is equal to the resultant of the horizontal components of the strains in the two diagonal bars forming the apex.

Let ab and ac represent in direction and amount the strains in two bars forming an apex, one bar being in compression, the other in tension. Let the verticals bd and ce be drawn, and through a , the horizontal de . Then bd and ce will correspond to the load on the diagonals ba and ac respectively; da and ae will be their horizontal components; and de will be the increment of strain developed at a .

Fig. 49.



When, however, the strains in the bars are both tension or both compression, their horizontal components will be antagonistic, and the increment will then be the difference between them instead of their sum (as de).

A vertical brace has no horizontal component.

124. *The general Rules for booms and bracing (84 to 95) hold good here also.*

125. *If the load be not concentrated at the apices, each apex must be considered to sustain part of the load on the two adjacent bays. If the load be uniformly distributed, each apex will sustain half the load on the two adjacent bays. For other distributions of load, the pressure or equivalent weight on each apex must be determined from 117. The total loads thus allotted to the several apices will be called the "weights."*


126. In this division of the work—

Let θ = Angle made by any brace with a vertical line. Then—

$$\text{Sec. } \theta = \frac{\text{Inclined length of brace}}{\text{Vertical distance between its ends}}$$

$$\text{Tan. } \theta = \frac{\text{Horizontal distance between its ends}}{\text{Vertical distance between its ends}}$$

$$\text{Sin. } \theta = \frac{\text{Horizontal distance between its ends}}{\text{Inclined length.}}$$



127. *Straight Semi-girder loaded in any manner.*

WEB.—*Every weight (125) on the girder is transmitted through its own system of triangles to the abutment. The load on any brace is equal to the sum of all the weights upon its system, between it and the unsupported end of the girder. For the strain on any brace multiply the load on it (as above) by sec. θ .*


BOOMS.—By (123),—The horizontal component of the strain in any brace = (strain in brace) \times sin. θ . (126.)

128.—EXAMPLE.—Let fig. 50 represent a parallel straight girder of otherwise regular construction loaded at three points (a/c). The weight of the load at a conducted along the braces abc and ade , that at c along cde . If l represent the

weight W_3 , ka will be the tension (91) on ab , and la = increment (123) at a . If m n also equal W_3 , nb will equal the compression in cb , and mb the increment at b . The load on cd is equal to W_1 and W_3 together. If op = this load, oc will equal the tension on dc , and pc the increment at c , and so on; st being equal to W_2 , sf will equal the strain in fg , and tf the increment at f .

Then (123) the tension (65) in $bg = mb + la$; that in $dg = ug + tf$ + strain in bg ; that in $id = qd + pc$ + that in dg . So also the compression (65) in $af = al$; that in $fc = tf$ + that in af ; that in $ch = cp + mb$ + that in cf + that in fa ; and so on. If the triangles for the strains be drawn to a large scale, the strains may be obtained quickly and accurately.

Fig. 50.



129. Straight Warren Semi-girder, Isosceles Bracing, loaded at the Extremity.

WEB.—Strain (Σ) in any brace = $W \sec. \theta$ (126.)

BOOMS.—Strain (S) in any bay of either boom,

$$S = n W \tan. \theta, \quad (126.)$$

where W = the weight, and n = number of diagonals between the centre of the bay and W .

130. Straight Warren Semi-girder, Isosceles Bracing, loaded uniformly on One Boom. The weight on the end apex = half that on the others (96).

WEB.—Strain (Σ) in any pair of diagonals forming an apex on the unloaded boom.

$$\Sigma = w x \sec. \theta, \quad (126.)$$

where w = load per unit of length, and x = number of units between the apex and the unsupported end of the girder.

BOOMS.—The strain (S) in any bay of the loaded boom,

$$S = \left\{ m(m-1) + \frac{1}{2} \right\} w y \tan. \theta \quad (126.)$$

In any bay of the unloaded boom,

$$S = m^2 w y \tan. \theta, \quad (126.)$$

where m = number of the bay counted from the outer end of the girder, and y = length of bay.

The following cases (viz., 131 to 138 inclusive) do not apply to continuous girders or whole girders fixed at the ends.

131. Straight Warren Girder, Isosceles Bracing, loaded at Any Point.

WEB.—Strain (Σ) in any diagonal between A and W ,

$$\Sigma = W \frac{b}{l} \sec. \theta.$$

In any diagonal between B and W ,

$$\Sigma = W \frac{a}{l} \sec. \theta \quad (126.)$$

Fig. 51.



BOOMS.—Strain in either end bay of the longer boom = (reaction of

support) $\times \tan. \theta$ (117, 126); and if this value be considered a unit, then the strains in the bays of the longer boom will be proportional to the series 1, 3, 5, 7, &c.; and in the shorter boom to the series 2, 4, 6, 8, &c., counting from the supports. Thus the strain in the second bay of the longer boom, from pier B will equal $(3 W \frac{a}{l} \tan. \theta)$.

Strain in the bay opposite the loaded apex = $\frac{W a b}{l d}$; $-d$ being the depth (98) of the girder.

132. If W be in the centre of the girder, the strain (Σ) on any diagonal,

$$\Sigma = \frac{W}{2} \sec. \theta \quad \dots \quad (126.)$$

And the strain (S) on the centre bay,

$$S = \frac{W l}{4 d}.$$

133. **Straight Warren Girder, Isosceles Bracing, with a concentrated Moving Load.**

WEB.—Every diagonal except the two end ones will be subject to counter strains (93). The maximum strain normal on any pair of braces forming an apex on the unloaded boom, will occur when the load is at the inner (mid-span) end of the inclosed bay. The maximum counter strain on any pair will obtain when the weight is at the outer (near abutment) end of the enclosed bay. The values can be obtained from (131).

BOOMS.—The maximum strain on any bay (84-7) of the unloaded boom is when the weight (W) is at the opposite apex; and on the loaded boom when the weight is at the next inner apex. The values can be obtained from (131).

134. **Any Straight Warren or Lattice Girder (isosceles of scalene bracing), with any Load symmetrically disposed about the Centre, either on one or both booms.**

Suppose the load collected at the apices, according to (125).

WEB.—*The load on any bar will be equal to the sum of all the weights (125) on its system of triangles, between it and the centre of the girder. The strain on the bar will equal the load on it, multiplied by the secant of the angle it makes with a vertical (126).*

Fig. 52.



Let the accompanying fig. represent half a girder, with loads on both booms symmetrically disposed about the centre a . Then the load on $b a$ will be half the weight (125) at a , that on $b c$ half the weight at a , and the whole weight at b ; that on $c d$, the weights at c and b and half the weight at a , and so on; $f g$ will take the whole weight at f ; $i j$ the whole weight at i ; $e f$ and $i e$ will not be necessary. (See foot note, p. 46.)

BOOMS.—The strains on the several bays will be best obtained from the web, by the application of (123), by summing the several increments (commencing at the outer ends of the girder) as follows.

The strain in $o n$ is the increment at o . But the strain in o pervades the whole length of the bottom boom, and therefore must be added to all the other increments *inwards* (towards the centre of the girder). The same may be said of the strains in the other bays; so that, strain in $n m = (\text{inc. at } o) + (\text{inc. at } n)$

Strain in $ml = (\text{inc. at } o) + (\text{inc. at } n) + (\text{inc. at } m) = (\text{strain in } mn) + (\text{inc. at } m)$.
 Therefore, the strain in any bay is equal to the strain in the next outer bay (+) plus the increment at the intermediate apex. Note. This applies also to semi-girders.

135. Any Straight Warren or Lattice Girder (isosceles or scalene bracing), with a uniformly distributed Moving Load.*

WEB.—The simplest method of obtaining the strains and counter strains (93) is by tabulating the strains produced by each weight separately, using (131, "Web"), which will hold good for other than isosceles bracing, provided the sec. θ (126) is corrected for the varying angles. The co-efficient, sec. θ , should not, however, be employed until after the summary is made. See example (136).

BOOMS.—The strains in the booms are greatest when the girder is fully loaded, and may be most easily obtained from the web by (123 and 134).

136. EXAMPLE.—A B, fig. 53, is a girder 50 ft. long, 10 ft. deep. The lattice bars are inclined at angle of 45° with a vertical. The moving load is equal to 1 ton per lineal foot, = 10 tons at each apex (on the lower boom) (125). In tabulating the strains, only those bars which incline in one direction need be considered, for the remainder are strained similarly and equally. (Thus a , fig. 53, corresponds exactly with the bar intersecting c , and so on). In the table below, + indicates compression, and — tension. The numbers are the loads on the bars. For the strains, the loads must be multiplied by sect. $45^\circ = 1.4$. The columns (maximum +) and (maximum —) are obtained by adding the + values together and the — values together respectively in each horizontal row. The column (uniform load) is the algebraical sum of the values in the horizontal rows.

Fig. 53.



Tracing the action of W_1 , it is seen (from 131) that in a , fig. 53, there is from it a load = $W \frac{b}{l} = 10 \times \frac{40}{50} = 8$ tons, evidently producing tension (—); and in c and e there is a load = $W \frac{a}{l} = 10 \times \frac{10}{50} = 2$ tons, as evidently producing compression (+). And so on for the other weights.

Bars.	W_1	W_2	W_3	W_4	Maximum +	Maximum —	Uniform Load.
a	— 8		— 4			— 12	— 12
b		— 6		— 2		— 8	— 8
c	+ 2		— 4		+ 2	— 4	— 2
d		+ 4		— 2	+ 4	— 2	+ 2
e	+ 2		+ 6		+ 8		+ 8

It will be seen from the above Table that bars c and d (and of course the bars inclined the other way which correspond to them) will suffer strains of both tension and compression.

* Case of a railway train passing over.

137. NOTE.—The strains in the web resulting from the weight of the girder itself, must not be calculated simultaneously and in combination with those resulting from the moving load. They should be calculated as for a stationary load (either by 134, or by tabulating as above, to form the column "uniform load").* The values thus obtained for the several bars should then be algebraically added to each of the columns ("maximum +", "maximum —", and "uniform load"); and it will be found that the modification in the first two will be more advantageous as the weight of the girder becomes large compared with that of the moving load; for the counter strains (93) will be less, and the amount of counter bracing necessary will be diminished also.

138. Any Straight Open-braced Girder, with a load unsymmetrically disposed about the Centre.

WEB.—*a.* By tabulating the strains produced by the several weights, and taking their algebraical sum;


Or, *b.* By (1st) abstracting the unsymmetrical parts of the load, and proceeding with the remainder by (134), (2nd), calculating for the unsymmetrical part by (135); and (3rd), then taking their algebraical sum of (1) and (2).

BOOMS.—From the web by (123).

139. Lattice Girders having their Diagonal Bars fixed together at their Intersection may be calculated as if the bars were not so fixed; for this mode of constructing a girder "can never add to the longitudinal strain upon it; but by calling into play the resistance of the bars to curvature adds to the stiffness of the bridge."†

140. Simple Truss.—Let $AB = l$, $WC = d$, and ϕ the angle between the inclined tie and the horizontal. Then,—

Fig. 54.



$$\text{Compression in } AB = \frac{Wl}{4d}$$

$$\text{Tension in } AC \text{ and } CB = \frac{Wl}{4d} \sec. \phi,$$

$$\text{Compression on } CW = W.$$

If WC represent $\frac{W}{2}$, then AW or BW will equal strain along AB ; and AC or CB that in the ties AC , CB .


* The two methods will not give equal results at and about the very point (the centre of the girder) where the values are of the greatest consequence. This is quite unavoidable; and the safest course (which need be pursued only in works of importance) is to employ both methods, and to provide against the greater strains.

† "Wrought Iron Bridges," by J. H. Latham, M.A.

141. When W is not in the Centre.Let $AW = a$, $BW = b$, $\phi = \text{angle } CAW$, $\phi' = \text{angle } CBW$.

The other notations as before.

Fig. 55.



$$\text{Compression along } AB = W \frac{ab}{ld},$$

$$\text{Tension in } AC = W \frac{ab}{ld} \sec. \phi,$$

$$\text{Tension in } CB = W \frac{ab}{ld} \sec. \phi' \dots (126.)$$

$$\text{Compression on } WC = W.$$


For the pressures on the supports, see (117).

142. If the truss in either fig. 54 or fig. 55 were inverted, the strains on the various parts would change in kind but not in amount.

143. In both the above cases, the tension on the ties and the direct (87) compression on AB would remain the same as at present, if instead of being loaded with the concentrated weight W , a load equal to $(2W)$ were spread uniformly along AB .

144. Compound Truss.—A structure of this kind may be regarded as compounded of a number of simple trusses (140). The simple truss $ACBD$ has to sustain at its centre (C) half the entire weight of the structure and its load. The truss $AECF$ has to sustain at E half the total load

Fig. 56.



between A and C . $AGEH$ must likewise be considered as supporting at G half the total load between A and E , and so on with the others. With a uniformly distributed load on AB , AHE and the three other similar trusses would each take $\frac{1}{4}$; AFC and its fellow, each $\frac{1}{4}$; and ADB , $\frac{1}{4}$ of the total load. The strains on the various parts can then be obtained from (140). The compression along AB is uniform throughout the whole length.

ARCH BRIDGES.

ARCHES WITH SPANDRIL BRACING.

145. With a Uniform Horizontal Load.

Fig. 57.

Let l = length of span, v = rise, or versine, y = horizontal distance of any point from the crown, w = load per unit of length.

ARCHED RIB.—Compression at the crown (C),

$$C = \frac{wl^2}{8v}$$

Compression at any other point (C')

$$C' = \sqrt{\left(\frac{wl^2}{8v}\right)^2 + (wy)^2}.$$

The expression for C' is strictly accurate only when the arch* is a parabola,—the curve of equilibrium for the load in question. It may, however, be safely used in most cases of practice for arcs of circles.

SPANDRIL.—If the arch* be parabolic, the only strain on the spandril will be the vertical pressure of the load. (See foot note †, p. 49.)

The spandril may then consist of a number of pillars or struts (as in fig. 57), each sustaining a vertical pressure = $\frac{wl}{N-1}$ nearly; N being the number of spaces into which the pillars divide the span.

If it consist of a continuous web, the compression of it per unit of length will be equal to w .

If the arch* be not a parabola, the strains in the spandril bracing may be obtained from 80, 81, (for continuous or "plate bracing"), or 111 (for diagonal open work), the rib being considered as the "compression boom."

TOP HORIZONTAL MEMBER.—With a parabolic arch this member (DE fig. 57) simply acts as an immediate support for the load (87). With an arch not a parabola, there will be a strain on it acting in the direction of its length, the nature and amount of which may be determined from the increments at the apices of the diagonals in the spandril, by the application of the law in 123 as illustrated in 134.

46. With a Moving Load.

r obtaining the strains on the various parts of a braced arch, subject to a distributed moving load, the following method may be employed.†

* More properly the neutral axis, or the line traced through the centres of gravity of the cross sections of the rib.

† Given by B. Stoney, B.A. (in "Theory of Strains"); and others.

Conceive the load to be collected into weights at the several apices on the horizontal member, each apex sustaining half the load on the two adjacent bays. The strains produced by each weight separately must then be found and tabulated, as in 135. Suppose the strains from weight W (fig. 58) are to be considered. At W draw the vertical W D. From the abutment A draw A C D through the crown of the arch (C) till it intersects the perpendicular at D. Join D to B. If the weight W be resolved (118) in the directions A D and B D, the amounts and directions of the reactions of the two abutments will be found. This may be readily done by producing A D to E, and erecting a perpendicular at B. Then, if E B equal the weight W, D E will be the reaction of A, and D B the reaction of B. If the former be traced up from A towards the weight, and the latter from B, by the resolution of forces (118, 119) the strains on the various parts may be thus found; and the same being done for the other weights in succession, the maximum strains produced by any position of the load may be derived from a table similar to that on page 45.




Fig. 58.

If the weight of the structure be small compared with that of the rolling load, it will be found that some of the end bays of the horizontal member, and of the middle bays in the arch, will occasionally suffer tension. See also 137.

UNBRAOED ARCHES,

Or arches whose stability depends upon the stiffness of the rib itself.

147. The Neutral Surface, or neutral curve of an arched rib, is a line traced through the centres of gravity (220) of the cross sections of the rib.

148. The Line of Pressures is a line the ordinates to which vary as the moments of rupture (1) for the load.*

The line of pressures is given at once in those diagrams (pp. 4 to 6), in which the ordinates for the moments of rupture are directed to be taken from and on the same side of one horizontal line. Where this is not the case (as in 20 or 21, for instance), the ordinates must be transferred to some new horizontal datum.

The ordinates may be taken to any scale for ready comparison with the neutral curve of the rib.

149. Whenever in any arch the line of pressures coincides with the neutral surface, the arch is in equilibrium, and the strain upon it is everywhere compressive.†

* For Masonry and many other Arches case 14 will be found exceedingly convenient. The structure and its load should be considered as made up of several small portions, each collected at its centre of gravity. The line of pressures can then be obtained by summing the ordinates for a new outline, as there directed.

† Strictly speaking, the pressure on an arch of other than a thoroughly incompressible material alters the form of the arch; and this alteration of form, or bending action, induces strains similar to those found in beams (see 1 and 23). The tension on equilibrated ribs (150, 151) is in practice so small (even where it is developed,—for this does not occur till the tension induced by the bending exceeds the direct compression on the rib) that it need not be regarded.

150. The Stability of an Arch incapable of Resisting Tension is secure so long as the line of pressures does not at any point deviate from the neutral curve by an amount, the proportion of which to the depth of the rib is given by the values of q (153) for various forms of cross section.

151. Wherever the line of pressures deviates beyond this limit, there is a tension on the rib on the other side of the neutral surface, increasing with the deviation.

152. Pressure along one edge of an arched rib invariably produces tension on the other edge, whatever be the form of cross section.

153. Limits of the deviation of the line of pressures from the neutral surface consistent with there being no tension on the rib ;—

Form of Cross Section.	Value of q .*
Rectangle	$\frac{1}{8}$
Ellipse and Circle	$\frac{1}{8}$
Hollow Rectangle (area = $b h - b' h'$) also I formed section, b' being the sum of the breadths of the lateral hollows. $\left\{ \begin{array}{l} \frac{1}{8} \left(1 - \frac{b' h'^3}{b h^3} \right) \div \left(1 - \frac{b' h'}{b h} \right). \end{array} \right.$	
Hollow Square (area = $h^2 - h'^2$)	$\frac{1}{8} \left(1 + \frac{h'^2}{h^2} \right).$
Hollow Ellipse	$\frac{1}{8} \left(1 - \frac{b' h'^3}{b h^3} \right) \div \left(1 - \frac{b' h'}{b h} \right).$
Hollow Circle	$\frac{1}{8} \left(1 + \frac{h'^2}{h^2} \right).$

b and b' = external and internal breadths ; and

h and h' = the external and internal heights or depths.


$$\text{I, section alike above and below} \quad \frac{1}{8} \left(1 + \frac{4 A}{A' + 2 A} \right).$$

A = area of each table or flange ;

A' = area of the connecting web.

154. The above values of q should be applied as a test for tension in cases of braced arches, and also where the spandril consists of columns ; for the line of pressures is then in reality a polygon, with the angles at the apices on the rib. (See fig. 59.)

Fig. 59.



154 A. When an Arched Bridge consists of several unequal spans, the neutral surfaces of all the ribs should be parts of the same figure—generally arcs of the same circle, or the same parabola).

* These values of q are from Professor Rankine's "Civil Engineering."

SUSPENSION BRIDGES.

155. ORDINARY SUSPENSION BRIDGE OF ONE SPAN, WITH A UNIFORM HORIZONTAL LOAD.

MAIN CHAINS.—The curve which the main chains will assume will be very nearly a parabola.

Let w = load on each chain per unit of length ;

l = length of span ;

v = versine, or depression of the chain ;

ϕ = angle which a tangent to the chain at any point makes with a horizontal ;

y = horizontal distance of any point from the mid-span.

Tension at centre, $T = \frac{w l^2}{8 v}$;

At any other point,

$$T' = \left(\frac{w l^2}{8 v} \right) \sec. \phi.$$

$$\text{Or, } = \sqrt{\left(\frac{w l^2}{8 v} \right)^2 + (w y)^2}.$$

Fig. 60.



SUSPENDING RODS.—Let N = the number of spaces into which they divide the span, then,

$$\text{Tension on each} = \frac{w l}{(N - 1)}.$$

TOWERS AND COUNTER-CHAINS.—The tension on the counter-chains, and the pressures on the towers may be readily found as follows :—Produce the tangent to the main-chain at the tower (C) till its length (CD) on a scale of parts, equals the tension at that point (found from T' above). Through D draw DE parallel to the direction of the counter-chain (CF). Produce the centre line of the tower till it intersects DE. Then (118) CE will give the pressure on the tower, and DE the tension on the counter-chain.

156. ORDINARY SUSPENSION BRIDGE OF MORE THAN ONE SPAN, WITH A UNIFORM HORIZONTAL LOAD.

When a suspension bridge consists of several spans, the chains of all of them must form portions of one and the same parabola.

The strains on the whole spans—as BC—will be the same as in (155).

The strains on the outer spans (A B) are identical with those in B D,

Fig. 61.



as the parts A B and B D are equal. But where the abutment spans are not equal to half the inner ones, the first conditions made in this paragraph must be observed, and then $T' = \left(\frac{w l^2}{8 v} \right) \sec. \theta$ (155), l being still the inner span.

The compression on the towers will equal the diagonal of a parallelogram, whose sides correspond in direction and length to the tensions in the chains on either side (as at E in fig. 61).

157. SUSPENSION BRIDGE WITH SLOPING RODS, WITH A UNIFORM HORIZONTAL LOAD.

MAIN-CHAINS.—The curve which each half of the chains will assume will be a parabola with its axis parallel to the direction of the sloping rods.

Fig. 62.



Tension at mid-span, $T = \frac{w l' l}{8 v}$; where ($w l'$) is the total vertical load on the rods; the other notations as in 155.

Tension at any other point,

$$T' = w y \operatorname{cosec.} \phi;$$

y being the distance from the mid-span to the bottom of the sloping rod, at the top of which T' is required; and ϕ the angle which a tangent to the chain makes with the horizontal.

SLOPING RODS.—Tension on any rod,

$$t = W \sec. \beta;$$

where W is the vertical load on the rod (half the load on the two adjacent bays); and β the angle which the rods make with a vertical.

HORIZONTAL MEMBER.—The compression (c) on the horizontal platform at any point distant (y) from the mid-span, is

$$c = w y \tan. \beta.$$

For the towers, see 155 or 156.

158. SUSPENSION BRIDGES WITH MOVING LOADS are subject to much infigurement, to prevent or modify which several means have been devised.

159. (1.) An auxiliary girder from pier to pier, anchored down to the abutments. If this girder be continuous for each span, its booms (fig. 38A) or about the middle half of its length must be able to resist a strain $= \frac{w l^2}{24 d'}$ and the web a shearing force of about $\frac{w l}{3}$; w being the intensity of the moving load per unit of length; l , the length of span, and d' the depth (98) of the girder.

160. (2.) When the bridge consists of several spans,—*Fixing the chains to the top of the towers*, and considering the latter as semi-girders, each one loaded at the extremity with $\frac{wl^2}{8v}$, notation as before (159). While the tower is suffering the strains consequent on the application of this force to its extremity, there is also a direct compression on it $= \left(w + \frac{w'}{2}\right)l$. This latter, it must be remembered, modifies the tensional (4) strains produced by the former.

161. (3.) *Inserting diagonal bracing* between the roadway and the chains. The strains on the various parts may in this case be obtained as in 146; they will be altered in kind only, not in intensity.

161A. (4.) *A pair of chains of identical curvature*, placed one above the other, and having diagonal bracing between, the greatest shearing force on which would be $\frac{2w'l}{7}$.

161B. (5.) *Counter chains attached to the main chains* at about $\frac{1}{2}$ span from the abutments or piers, and running down to the latter. They should be made to resist a strain of $\left(\frac{w'l}{2} \times \sec. \theta\right)$; θ being the angle between the counter chains and a vertical.

161C. (6.) *Inclined straight chains*, for carrying the platform and the moving load. They extend from the towers, and meet or intersect each other. They are sustained in the required straight lines by rods, which are connected to curved chains, the latter having to carry the weight of the straight chains only.* The tension on the latter may be found from 155. The tension on the straight chains may be most readily found by a parallelogram of forces (118).

162. Abutments and Piers. *Girders*, properly so called, viz., those structures which simply *rest upon* the supports, bring upon those supports a vertical pressure equal to the shearing force developed there. (See last paragraph in 46.)

Abutments of Arches. The thrust at the abutments of an arch is exactly equal to the compression in the arch rib at the springing, the value of which may be determined from 145, 146.

For the towers and piers of suspension bridges, see 155, 156.

Whenever the piers of a bridge consist of columns, their strength as such—their liability to flexure, &c.—must not be overlooked. (See 168.)

SECTION III.

DISTRIBUTION OF MATERIAL TO RESIST THE CALCULATED STRAIN

(Embodying Processes VI, VII, p. 24.)

163. The Strength of a Structure, or of any part of it, is its ability to resist the external forces tending to cause its rupture.

* Mr. R. M. Ordish's system.

164. Axiom. *No whole is stronger than its weakest part.*

165. Uniform Strength. A structure is said to be of uniform strength when no one part would yield before another, supposing the structure to be subjected to the load, or a multiple of that load for which it was designed.

In structures not of uniform strength, all the material in excess of that necessary for uniformity of strength is redundant.*

To secure *uniformity of strength*, a constant coefficient of safety (172) must be used for the same material strained in the same way. For beams of uniform strength, see 215—218.

166. Units. It is necessary to adopt :

1. Unit of Strain or Stress ; generally 1 lb. avoirdupois.
2. Unit of Sectional Area ; generally 1 superficial inch.
3. Compounded Unit of Strain and Area ; 1 lb. per sq. inch.

Let A = area of a section in units (sq. inches).

S = calculated strain in units (pounds avoirdupois).

U = ultimate strength, or breaking weight of the material—in lbs. per sq. inch of section. (For numerical values, see 231.)

C_s = coefficient of safety (172).

WS = working strain (172).

PRINCIPAL STRAINS TO BE MET WITH IN BRIDGES, GILDERS, &c.

167. Tension, causes or tends to cause the fracture of the material upon which it acts by tearing asunder its particles.

The resistance to *Tension* is directly as the area of the cross section of the material, taken perpendicular to the direction of the strain (164).

$$\text{Area necessary to safely resist a strain, } A = \frac{S \times C_s}{U} = \frac{S}{WS}.$$

168. Compression, causes or tends to cause the failure of the material, by crushing, buckling, or both combined.

Crushing. Materials in compression ("struts") can be considered liable to crushing alone, only when their least diameter (taken perpendicular to the direction of the strain) is not more than about $\frac{1}{4}$ of their unsupported length,† The resistance is then directly as the sectional area.‡

$$\text{Area necessary to safely resist a strain, } A = \frac{S \times C_s}{U} = \frac{S}{WS}.$$

Buckling. When struts have an unsupported length equal to about 25§ times their least diameter, they may be considered to suffer almost en-

* It cannot be said that the excess is entirely useless ; but more on this point would be out of place here.

† Hodgkinson.

‡ The resistance to crushing of a body whose diameter normal to the pressure far exceeds its dimensions in a line with the pressure, is very great, but equally indefinite.

§ For wrought-iron struts with riveted joints, from 40 to 50 times.

tirely by being buckled, i. e., crumpled up.* Struts shorter than this fail, partly by crushing, and partly by buckling.

169. BREAKING WEIGHT OF COLUMNS.—*Prof. Hodgkinson's formulae for cast-iron columns.* When of more than from 25 to 30 diameters in length,

$$\text{Break. wt.} = \frac{44 \cdot 16 d^{2.6}}{l^{1.7}} \text{ for solid pillars; and}$$

$$\text{Break. wt.} = \frac{44 \cdot 3 (d^{2.6} - d'^{2.6})}{l^{1.7}};$$

for hollow cylindrical pillars, flat, or firmly fixed at both ends, d being the external diameter, and d' the internal diameter in inches, and l the length in feet. Columns rounded or moveable at both ends have but $\frac{1}{2}$ the strength of those flat or fixed; and the strength of those with one end fixed or flat; and the other rounded or moveable, is about an arithmetical mean between these two cases.

When of less than from 25 to 30 diameters in length, let b be the value obtained by the above formulae, and c the crushing load of a short block (331) of the same sectional area as the column, then the corrected breaking

$$\text{weight} = \frac{b c}{l + \frac{3}{4} c}$$

General formula for the breaking weight of Cast and Wrought Iron Columns.

Let C = compressive resistance of a short block of the same sectional area.

$r = \frac{l}{d}$ = length of column divided by the greatest diameter.

$$\text{For cast-iron,} \quad \text{B. W.} = \frac{C}{.68 + .1 r}$$

$$\text{For wrought iron,} \quad \text{B. W.} = \frac{C}{.85 + .04 r}$$

Breaking Weight in tons per square inch of section.

$$\begin{array}{l} \text{Round} \left\{ \begin{array}{l} \text{cast iron,} \quad \frac{13,500}{330 + r^2} \\ \text{wrought iron,} \quad \frac{34,000}{2000 + r^2} \end{array} \right. \\ \text{Square timber,} \quad \frac{850}{350 + r^2} \end{array}$$

Breaking Weight of timber pillars, taking the strength of a cube = unity.

Value of r	1	12	24	36	48	60
Breaking weight	1	$\frac{8}{9}$	$\frac{1}{2}$	$\frac{1}{3}$	$\frac{1}{4}$	$\frac{1}{5}$

* Professor Hodgkinson.

170. LONG STRUTS should be made with a cross section, which will insure a certain amount of rigidity or stiffness, and thus resist the tendency to buckle: or they should be braced (either externally or internally), and thus divided into a number of shorter lengths, each of which (and, therefore, the braced strut as

Fig. 63.



a whole) may be considered as suffering crushing alone.

171. Shearing causes, or tends to cause, contiguous sections of the material to slide over each posing that D E is part of a and B C part of the load). The resistance to shearing is directly as the area that

Fig. 64.



Area necessary to safely

resist a shearing strain,

$$A = \frac{S \times Co}{U} = \frac{S}{W S}$$

Shearing strains will be found to act on the vertical web* of continuous webbed girders, and in joints generally, which see.

For *Bending, bending intensities, and the resistance of materials to them*, see I, and 191 et seq.

172. Coefficients of Safety are numbers representing the proportions of the ultimate strength of materials to the strains that can safely be brought upon them. Coefficients of safety may be variously estimated. The following may, however, be taken as a fair average of the factors at present in use where the materials employed and the workmanship are ordinarily good.

	Metals.	Timber.	Masonry.
For a dead load . . .	3	4 to 5	4
For a live load . . .	5	8 to 10	8

Under *dead load* may be included all permanent or stationary loads, and loads very gradually applied.

Under *live load*, all rapidly moving, and suddenly applied loads.

$$\frac{\text{Ultimate resistance}}{\text{Coefficient of safety}} = \text{Working strain.}$$

173. The Modulus of Elasticity (E) (in pounds per square inch as given in 231) is the weight (in pounds) required to elongate or shorten, by an amount equal to its original length, a bar of material (of one square inch of cross-section), and is on the supposition that the elasticity of the material would remain constant throughout the operation.

$$\frac{\text{Strain (in lbs.) per sq. inch on a bar}}{\text{Mod. of elas. (in lbs.) per sq. inch}} = \frac{\text{Increase or diminution of length}}{\text{Original length of the bar}}$$

JOINTS.

174. Joints should always be as strong as the parts they serve to join.


* In the paragraphs 63 and 74, the flanges have not been supposed to take part in resisting the shearing forces (so called from the shearing strains above), any more than the web in taking its share of the horizontal strains. (66.)

175. *The various parts of a joint, and the several parts in a fastening, should be of uniform strength.*

IRON JOINTS AND FASTENINGS.

176. Rivets may fail in several different ways, depending on their office in a joint. The head may be shorn off (as at C D, E F); or the rivet may be ruptured at any section (as A B) when the rivet is in tension.

Fig. 65.



Let S = the tensional strain; then d (diam. of rivet) should not be less than $\sqrt{\frac{S \times Co}{U \times .7854}}$, U being the

ultimate resistance of the material to tension (231); and C D or E F should not be less than $\frac{S \times Co}{U \times 3.1416 d}$ (172), U being here the ultimate resistance to shearing (231).

When the rivet has to resist a shearing strain (S) at A B, d must not be less than $\sqrt{\frac{S \times Co}{U \times .7854}}$, U being the ultimate shearing resistance.

General Rule.—The height of the head (h) should never be less than half the diameter of the rivet.

177. Bolts.—The diameter of a bolt liable to shearing at the spindle (as at A B, fig. 65) must be determined from (176).

If the bolt be in tension it will fail either—1st, by shearing off the thread; 2nd, or by shearing off the head; 3rd, or by tensional rupture of the spindle. For a perfect thread the height of the nut and of the head should be equal: but to allow for inaccuracies of workmanship, the height of the nut should be about twice that of the head. The height of the nut should not be less than the diameter of the spindle; in practice it is frequently made much more than this.

178. *The diameter of a nut or head of a bolt, or of the head of a rivet, should be not much less than twice that of the spindle.*

179. Pin Joints in Tension Bars.—(Such as in some suspension chains, triangular girders, and trusses).


Pin.—Let n = the least number of sections at which the pin must be divided before the joint can fail (4 in fig. 66), a = sectional area of pin, and S the tension on the joint, then

$$a = \frac{(S \times \text{Coef. of safety})}{(\text{Ult. shear.}) \times n}$$

The coefficient (172) should be large, as any inaccuracies in the workmanship will tend to concentrate the strain in certain parts.

Link.—The section of any link-head taken through the centre of the pin-hole (A B) should equal about half as much again as that taken through the body of the link (as C D), in consequence of the inequality in the distribution of the strain.

Fig. 66.



Let l = the length of overlap, EF or GH (fig. 66); t = thickness of all the overlaps, in one series, taken together (2 or 3, fig. 66), then

$$l = \frac{S \times Co}{2 \times U \times t},$$


where S is the strain on the joint, and U the ultimate resistance to shearing.

General Rule.—Diameter of pin may be $\frac{3}{4}$ of the width of the links.

Riveted Joints in Tension.

- 180. The Effective or Available Section** of a plate with rivet holes in it depends upon the disposition of the rivets. Thus, in fig. 67, the least section of plate that could be taken is that at AA. But before the joint can fail here by the rupture of (say) the upper plate at AA, the three rivets marked *a a a* must be shorn. And it will be found that in a joint arranged in this way, the effective section will be equal to that taken through the first rivet, or line of rivets, as at BB.


Fig. 67.



- 181. The sectional area of all the rivets in a joint taken together should be equal to the effective section of the plate.**

The distance between the centres of rivets which stand in a line (perpendicular to the tension on the joint) should be made $= d + \frac{1}{4} (.7854 d^2 n)$, in which n is the number of lines of rivets as above (5 in fig. 67); t , the thickness of the plate; and d diameter of rivets.


- 182. Lap Joints may fail,**—1st, from the tensional rupture of the effective section (180) of the plate; 2nd, by the shearing of the rivets; 3rd, by the shearing out of the overlaps (A A A A, fig. 68). The strain on each rivet $= \frac{\text{Str. on joint}}{\text{Num. of riv.}}$ and they have each to be shorn at one section only (179). The distance between the lines of rivets (181), (of which there are 3 in fig. 68) must not be less than the overlap required for the rivets in the first row (as at A). The latter may be determined from the following equation,



$$l = \frac{S \times Co}{2 n t U},$$

in which S = tension on the whole joint; n , total number of rivets; t , thickness of plate; U , ultimate resistance of the plate to shearing; Co , a suitable coefficient of safety (172).

JOINTS FOR TIMBER STRUCTURES.

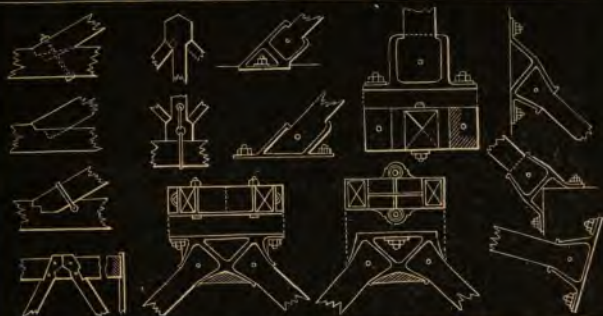

JOINTS FOR IRON STRUCTURES.



VARIOUS SECTIONS OF GIRDERS.



183. Fish Joints.—Where only one cover or fish-plate is used (as in fig. 69), the case is virtually identical with two successive lap-joints, and can be calculated as such (182). Where two cover-plates are employed, it is to be borne in mind, that before the joint can fail, each rivet must be shorn at *two* sections, so that the section of each need be but half that necessary with a single cover-plate (184). The thickness of each cover-plate must never be less than half that of the main plates.


Fig. 69.



Riveted Joints in Compression.

184. In lap-joints the effective sectional area of the plate is equal to the *loss* of section by rivet-holes, not counting those which are behind any others in the direction of the pressure. Thus, in fig. 70, the effective bearing section of the plate is that from A to B.

Fig. 70.



For the shearing strain (171) on each rivet (176), divide the strain on the joint by the total number of rivets. A rather large coefficient of safety (172) should be used, as inaccuracies of workmanship will materially concentrate the strain at certain points.

185. Butt Joints (same as fish-joints in tension) may be considered as having an effective section equal to the total section of the plate; for if the rivets fill the holes as they should, there is hardly any loss of strength from them.

The cover-plates are required simply to keep the main plates in their proper positions.

186. Joints formed by gibs and cotters may be calculated from 179. It is advisable that the obliquity of the surfaces to the direction of the strain should not exceed 4° or 5° .

A few cast and wrought iron joints are given in Plate II.


JOINTS IN TIMBER STRUCTURES.

187. A form of joint having been determined, the parts at which it is liable to fail must be traced out, and sufficient strength be given to them, using (165—171), and particularly observing (164).

188. Joints in Tension.—*Fished and scarfed joints.* Figs. 71, 72 represent forms of fish-joints.

In fig. 71 the tension may cause rupture at A B, or C D; or at E F and G H. (*Both of the latter must fail before the joint gives way by the rupture of the fish-pieces.*) And further, the joint may fail by the shearing off of Q F and R G; or of F S and G T; or of K Q and L M; or of S N and O P. The

Fig. 71.



above is disregarding the shearing resistances of the four bolts shown in fig. 71, which must be taken into account in a somewhat similar way.

Fig. 72.



Fig. 72 represents a joint fished with iron plates, and also "scarfed." Fig. 73 shows another form of scarfing.

Fig. 73.



189. Joints in Compression.—

Surfaces abutting against each other should be as nearly as possible perpendicular to the direction of the thrust. Where convenient, fish pieces may be used to retain the main-pieces in their proper position; or the latter may abut into cast-iron sockets suitably designed.

On Plate II. are given several forms of joints for timber structures, which can profess only to be suggestive.

190. Shouldered Tenon for attaching Cross to Main Beams.—

Fig. 74.



The weight on the end of the cross beam AB is borne by the shoulder C, which is let into the main beam for a distance equal to about one-sixth of the depth of the former. The length of the tenon, D, is about twice its depth.

BEAMS OF VARIOUS SECTIONS.

191. For those beams, girders, and other similar structures, in which certain parts are supposed to resist certain definite strains (62), and other parts, other strains (for instance, flanged girders with *thin* continuous webs, all open-webbed girders, trusses, &c.) see 63 to 162. A mode of procedure is there adopted which would not be thoroughly applicable to those beams in which every fibre or particle is considered to take part in resisting the bending action of the moment of rupture (1), and where the whole section is liable to the action of the shearing force (1).

In Designing a Beam—

192. Determine the nature of its cross section.

If the exact proportions of the section are to be adhered to, and the area alone required,—express all the dimensions of the section in terms of one of them, that there may be but one unknown quantity.

Thus—suppose a beam to support a given load is to be rectangular, with the depth twice the breadth, then let b = breadth, and $2b$ = depth.

If all the dimensions of the section, except one, be given, that one will of course be the unknown quantity. Then,—

193. Substitute for M , in the equations given hereafter, its value as found from the span, manner of loading and supporting, &c., pp. 2 to 15. The dimension, or dimensions, required may then be obtained. Lastly,—

194. If at any vertical section, there be not sufficient material to resist the shearing force (1, 34, *et seq.* and 171), the necessary addition must be made to the section.

This will seldom be required at other places than near the supports in discontinuous beams, and near the points of contrary flexure (23) in continuous beams.

195. *The weight of the beam itself* must always* be added to the extraneous load upon it; and may be approximately estimated by a process similar to that in 60.

196. THE STABILITY OF A LOADED BEAM depends on the equation

$$M = R. (1.)$$

197. Abbreviations—

Let M = moment of rupture (1, 2), the values of which may be determined from the several cases 7 to 33.

$R = \frac{CI}{t}$ = moment of resistance (1) of the section.

I = moment of inertia of the section.

t = distance of the neutral axis (198) from the farthest edge of the section.

a = total area of the section.

C = modulus of rupture (203).

198. The Neutral Axis ($N - A$ in the sections, figs. 82—84) is a section of the neutral surface,—a layer in the beam (and the only one) which is neither extended nor shortened by the action of the load (4).

199. Provided that the limits of elasticity of the material of the beam be not exceeded, *the neutral axis will pass through the centre of gravity of the section* (220).

200. There must be but one lineal unit used in obtaining the values of M , R , I , t ; and the superficial unit used for a must correspond to that lineal unit.

201. The section at which R and I (197) are taken may be made parallel to the reaction of the supports of the beam. †

Fig. 75.

202. Wherever either the upper or lower surface of the beam is not perpendicular to the action of the load, then C must be modified to $(C \cos.^2 \theta)$, θ being the inclination of the most inclined surface to that perpendicular.



* Except in small girders, or beams of minor importance.


† The section at which the moments of resistance should really be taken is a curved surface cutting the upper and lower edges of the beam, and the neutral surface all at right angles, whatever be the form of the beam; and the moment of rupture to be equated with it should be taken at the intersection of this curved surface with the neutral surface of the beam.

203. Modulus of Rupture.—The *theoretical* value of C is the resistance of the material to direct compression or tension. But it is found from experiments on cross breaking that this value is not sufficiently high. Amongst the reasons that have been assigned for this, are—1st, that in addition to the resistances of the particles of the beam to a direct strain, there is another resistance arising from the lateral adhesion of the fibres to each other, termed the "Resistance of Flexure." (See Barlow on the "Strength of Materials," 6th edition.) And 2nd, that in most metallic beams (especially when cast) the outer skin, which is strained more than any other part of the section, is very much stronger (from many well-known causes) than the average section; whereas if the direct tensile or compressive resistance of the same beam, in the direction of its length, were being experimentally ascertained, it would be the average section at least, and perhaps the centre (weaker) portion especially, from which the strength would be determined. However, there is evidently a necessity to employ a higher value than that for the direct resistance; and Professor Rankine has adopted a modulus of rupture which is 18 times the load required to break a bar of 1 sq. inch section, supported on two points one foot apart, and loaded in the middle between the supports (232).

MOMENTS OF INERTIA AND RESISTANCE OF BEAMS OF VARIOUS SECTIONS.

204. Beam of a solid rectangular section.

Fig. 76.




$$I = \frac{b d^3}{12} = \frac{a d^2}{12}$$

$$R = \frac{C b d^2}{6} = \frac{C a d}{6} = M.$$

205. Beam of a hollow rectangular section.

Fig. 77.



$$I = \frac{b d^3 - b' d'^3}{12}$$

$$R = \frac{C (b d^3 - b' d'^3)}{6 d} = M.$$

206. Beam of a solid circular section.

Fig. 78.



$$I = .7854 r^4 = \frac{a r^2}{4}$$

$$R = C .7854 r^3 = \frac{C a r}{4} = M.$$

207. Beam of a hollow circular section.

$$I = .7854 (r^4 - r'^4).$$

$$R = \frac{.7854 C (r^4 - r'^4)}{r} = M.$$

Fig. 79.




208. Beam of a solid elliptical section.

$$I = .7854 b d^3.$$

$$R = .7854 C b d^2 = M.$$

Fig. 80.




209. Beam of a hollow elliptical section.

$$I = .7854 (b d^3 - b' d'^3).$$

$$R = \frac{.7854 C (b d^3 - b' d'^3)}{d} = M.$$

Fig. 81.




210. Beam with one flange.

$$I = \frac{1}{2} \left\{ b d^3 + b' d'^3 - (b' - b) d''^3 \right\}.$$

$$R = \frac{C I}{t} = M.$$

Fig. 82.



211. Beam with two equal flanges.

Fig. 83.



$$I = \frac{b d^3 - b' d'^3}{12}.$$

$$R = \frac{C (b d^3 - b' d'^3)}{6 d} = M.$$

212. Beam with two unequal flanges.

Fig. 84.



$$I = \frac{1}{12} \left\{ b d^3 - (b - k) (d - c)^3 + b' d'^3 - (b' - k) (d' - c')^3 \right\}.$$

$$R = \frac{C I}{t} = M.$$

213. To find the Moments of Inertia and Resistance of any Cross Section made up of a number of simple figures.

Find the moment of inertia of each of the simple figures about an axis traversing its centre of gravity parallel to the neutral axis of the complex figure.

Multiply the area of each of the simple figures by the square of the distance between its centre of gravity and the neutral axis of the whole figure.

Add all the results together for the moment of inertia of the whole figure.

Let I_1 = moment of inertia of one of the simple figures about its own neutral axis; A its area; v the distance from its centre of gravity to that of the whole section (220); and I , moment of inertia of the whole section; then,

$$I = (I_1 + v^2 A) + \&c.$$

$$\text{Moment of resistance, } R = \frac{C I}{t} \quad . \quad . \quad . \quad (197.)$$

214. Moments of Inertia and Resistance, Ultimate Strength, and Deflections of Similar Beams.

Moments of inertia Moments of resistance Strengths Deflections	$\left\{ \begin{array}{l} \text{of similar} \\ \text{sections} \\ \text{vary as} \end{array} \right.$	$\left\{ \begin{array}{l} \text{the 4th power} \\ \text{the 3rd power} \\ \text{the 2nd power} \\ \text{the 1st power} \end{array} \right.$	$\left\{ \begin{array}{l} \text{of their linear} \\ \text{dimensions.} \end{array} \right.$
---	---	---	---

BEAMS OF RECTANGULAR SECTION AND OF UNIFORM STRENGTH (165).

Elevations of Beams of Constant Breadth, and Plans of Beams of Constant Depth.

215. A semi-beam (7) loaded with a concentrated weight at its extremity.
- $\left\{ \begin{array}{l} \text{A B, a parabola, with its vertex at B.} \\ \text{A triangle.} \end{array} \right.$



Fig. 85.—Elevation.




Fig. 86.—Plan.

216. Semi-beam (9) loaded uniformly over its entire length.

$\left\{ \begin{array}{l} \text{A B, a straight line.} \end{array} \right.$



Fig. 87.—Elevation.




Fig. 88.—Plan.

217. Beam supported at both ends, loaded at any point (13) with a concentrated weight.

$\left\{ \begin{array}{l} \text{A C and B C, pair of parabolas, with their vertices at A and B respectively.*} \end{array} \right.$



Fig. 89.—Elevation.





Fig. 90.—Plan.

$\left\{ \begin{array}{l} \text{A C D, B C D, a pair of triangles, having a common base, C D.*} \end{array} \right.$



Fig. 91.—Elevation.



218. Beam supported at both ends, loaded uniformly (19) over its entire length.

$\left\{ \begin{array}{l} \text{A semi-ellipse, A B major axis.*} \end{array} \right.$

$\left\{ \begin{array}{l} \text{A C B, A D B, pair of parabolas, having their vertices at mid-span.*} \end{array} \right.$

* The additional material dotted in at the supports is necessary to resist the shearing force (194).

219. How to cut the, (1.) Strongest and, (2.) Stiffest Rectangular Beam from a Cylindrical Log.

Let the accompanying figs. 93, 94 represent sections of the log.

Fig. 93.



Strongest.

Fig. 94.



Stiffest.

Draw a diameter. For the beam whose ultimate strength will be the greatest, trisect the diameter. For the beam which will deflect the least, divide the diameter into four equal parts.

Draw perpendiculars to the diameter as shown, and their intersection with the circumference will determine the inscribed rectangle, which is the section of the required beam.

220. To find the Centre of Gravity (199) of any Section.

Let $a, a', a'',$ &c., represent the sectional area of the several elementary parts into which the section may be decomposed; $g, g', g'',$ &c., the known distances of their respective centres of gravity from any fixed axis—say the lower edge of the beam—and S , the distance from the latter to the centre of gravity of the total section; then,

$$S = \frac{a g + a' g' + a'' g'' + \&c.}{a + a' + a'' + \&c.}$$

DEFLECTION.

221. Deflection is the “displacement of any point of a loaded beam from its position when the beam is unloaded.”

222. Camber is an upward curvature, similar and equal to the maximum calculated deflection, given to a beam or girder or some line in it, in order to ensure its horizontality when fully loaded.

**GIRDERS WHOSE CROSS SECTIONS ARE UNIFORM AND EQUAL
THROUGHOUT THEIR LENGTHS.**

223. The maximum deflections for several cases are given with the moments of rupture (7 to 25), by the values for Def.

FLANGED GIRDERS OF UNIFORM STRENGTH.

224. Girder supported at both ends.

Let D = central deflection.

d = central depth.

l = length of span.

K = sum of the extension of one flange or boom, and the shortening of the other by the strains upon them.

$$\text{Then } D = \frac{K l}{8 d}.$$

K may be found as follows: Let S = strain in lbs. per sq. in. on either boom when the load producing the deflection is on the beam; E = modulus of elasticity (173); l = length of boom; then $k = \left(l_1 \pm \frac{S l_1}{E} \right)$ = length of boom after the strain is on; and if k' correspond similarly for the other boom, then $k + k' = K$. If the booms be of equal length and section, then $K = (2 k)$.

225. Semi-girder.

Let d = depth at support; the other notations as before.

The deflection at the unsupported extremity, —

$$D = \frac{K l}{2 d}.$$


226. Continuous Girders, and Girders fixed at One or Both Ends (24—33).

When any whole span is analysed it will be seen (24 to 30) that it is equivalent to a whole girder supported at the ends, and one or two semi-girders, as the case may be. To these the above formulæ (223—5) may be applied, and the maximum deflection obtained. Thus—

For a girder (as A B) fixed at both ends (24—26), the deflection of the semi-beams A C and D B at C and D (11 or 225), added to the deflection of C D below its ends, as obtained from (12, 19, or 224), will be the total maximum deflection of E below A. B.

Again, for continuous girders with moving loads (32, 33), the maximum deflection at the middle of a span (B C, fig. 25) will occur simultaneously with the maximum positive moment of rupture (M_r , page 14), at which time the points of contrary flexure will be at M, M_1 (fig. 25), whose positions may be determined either from the diagram, or formulæ. In the outer spans of continuous girders, and in girders fixed at one end and supported only at the other, the deflection at the middle of the part corresponding to a whole girder simply supported (see 28, 29), may be found by adding the central deflection of the latter as such (19, 224) to half the deflection of the remaining (semi-beam) portion (11 or 225).

Fig. 95.



BREAKING AND SAFE LOADS FOR BRIDGES, GIRDERS, ETC.

227. In the whole of the foregoing pages it is supposed that the span, load, and other data as far as necessary are given, in order to find the resulting strains, and the quantity of material to resist them.

228. To find the Load (breaking or safe) when the Quantity of Material, Span, &c., are given, is simply an inversion of the former calculations.

For sectional area of material, substitute an equivalent strain, breaking or safe according as breaking or safe load is required.

Then ascertain the load that would produce that strain, and that will be the load required.

Remembering that if the structure be not of uniform strength, the strength of the weakest part determines the strength of the whole (164).

229. **EXAMPLE I.**—What load, at the centre of a wrought-iron, single-webbed or plate girder of uniform strength (165), and of the following dimensions, would cause the rupture of the girder,—Length of span, 20 ft.; central depth (67, 75), 1'5 ft.; effective section (180) of the lower flange at the centre, 4 sq. in.; iron of average quality (231).

As the girder is of uniform strength, it matters not what part is considered, for the same result would be obtained.

Lower flange will be in tension (65—1).

Ultimate strength of average wrought-iron plate (231), 55,000 lbs. per sq. in.

sq. in. lbs. lbs.

$4 \times 55,000 = 220,000 =$ breaking strength of lower flange.

Then from (12 and 67) strain on lower flange $= \frac{Wl}{4d} = 220,000 \text{ lb.} = \frac{W \times 20}{4 \times 1'5}$

Therefore $W = \frac{220,000 \times 4 \times 1'5}{20} = 66,000 \text{ lb.} = 29'4 \text{ tons.}$

230. **EXAMPLE II.**—Required the greatest safe (172) load uniformly distributed on a rectangular beam of British oak projecting from a wall.

Length of beam = 6 ft. = 72 in. . . . (200.)

Breadth „ = 6 in.

Depth „ = 9 in.

Taking coef. (172) as 5; C (203) as 10,000. . . . (231.)

$M = R$ (1, 196.)

$M = \frac{wl^2}{2}$. . . (9.) $R = \frac{C \cdot a \cdot d}{6 \times C_o}$. . . (204.)

$= (wl) 36.$ $= \frac{10,000 \times 54 \times 9}{6 \times 5}$
 $= 162,000$

$36 (wl) = 162,000.$

$wl = 4,500 \text{ lbs.} = 2 \text{ tons.}$

231. TABLE OF THE STRENGTH, &c., OF MATERIALS IN POUNDS AVOIRDUPOIS PER SQUARE INCH OF SECTION.

Materials.	Ultimate Resistance to				Modulus of Elasticity.	Weight of a Cubic Foot in lbs.*
	Tension.	Compression.	Shearing.	Cross Breaking, Modulus of Rupture.		
METALS:						
Brass, Cast	18,000	10,300	9,000,000	{ 487 to 524'4
„ Wire	49,000	14,230,000	
Copper, Rolled.....	60,000	110,000	17,000,000	{ 533 549 556
„ Bolts	36,000					
Iron, Cast						
„ American best	40,000	110,000	27,700	40,000	18,000,000	444
„ „ average	16,000					

* The specific gravities may be readily found when it is known that a cubic foot of water weighs 62'5 lbs.

TABLE OF THE STRENGTH, ETC., OF MATERIALS—continued.

Materials.	Ultimate Resistance to				Modulus of Elasticity.	Weight of a Cubic Foot in lbs.
	Tension.	Compression.	Shearing.	Cross Breaking, Modulus of Rupture.		
METALS:—cont.						
Iron, Wrought ..	{ 54,000 to					
" " Bar	{ 73,000 65,000					
" " " average	{ 41,000 to	100,000*	50,000	...	29,000,000	480
" " Plates	{ 71,000 to	36,000 to	...	42,000	25,000,000	
" " " average	{ 55,000	40,000		
" " Joints— single riveted .	40,000					
double riveted †	53,000					
" " Wire	84,000	15,000,000	
" " Cables ..	88,000					
Steel Bars	{ 17,000 to	150,000	120,000	...	30,000,000	{ 497 to 493
" " average ..	134,000					
" " Plates	95,000 80,000					
TIMBER:						
Ash.....	18,500	9,000	1,400	{ 12,000 to 14,000	1,600,000	47
Beech.....	11,500	9,000	...	{ 9,000 to 13,000	1,350,000	43
Birch.....	15,000	6,500	...	11,700	1,500,000	44.4
Box.....	20,000	10,000	2,000,000	60
Cedar.....	11,400	5,800	...	7,400	496,000	30.4
Elm.....	12,000	10,000	1,400	{ 6,000 to 9,700	1,000,000	34
Fir.....	12,000	5,500	{ 500 to 1,500	{ 5,000 to 10,000	700,000 to 2,000,000	30 to 44
Mahogany	{ 8,000 to 20,000	8,000	...	{ 7,600 to 11,500	1,600,000	{ 35 to 53
Oak, English	{ 10,000 to 18,000	10,000	2,300	{ 10,000 to 13,600	900,000 to 1,700,000	43 to 62
" American ..	12,000	6,000	...	10,600	2,000,000	54
Teak	{ 10,000 to 15,000	12,000	...	{ 12,000 to 19,000	2,300,000	{ 41 to 61
HEMPEN CABLES	6,000					

* It is difficult to estimate the compressive resistance of short blocks of wrought iron, as the material bulges very much under pressure.

† One and two rows of rivets (181). Joints of equal section to the plates taken through the line of rivets.—From numerous experiments by W. Fairbairn.

TABLE OF THE STRENGTH, ETC., OF MATERIALS—*continued.*

Materials.	Ultimate Resistance to				Modulus of Elasticity.	Weight of Cubic Foot in lbs.
	Tension.	Compression.	Shearing.	Breaking, Modulus of Rupture.		
STONES, CEMENT, ETC.:						
Brick, Fire	1,700				
„ Strong Red { 275 to 300 }		1,100	{ 125 to 135 }
„ Weak Red { 550 to 800 }						
Chalk	400	{ 117 to 174 }
Granite	11,000	{ 164 to 172 }
Mortar, ord.	50	{ 110 to 170 }
Limestone	4,500	2,500,000	{ 180 to 180 }
Sandstone	{ 2,000 to 5,500 }	...	{ 1,100 to 2,300 }	...	{ 130 to 157 }

232. VARIOUS METHODS OF DRAWING PARABOLAS, THE BASE AND HEIGHT BEING GIVEN.*

I. (Plate III., fig. 1.) BY ORDINATES OR OFFSETS FROM A TANGENT (E D) TO THE PARABOLA AT ITS VERTEX (D).


Through D draw D E parallel and equal to A C. The ordinates or offsets from any points in D E to the parabola will be proportional to the squares of the distances of those points from D. Thus, if the ordinate at a be 1, then the ordinate at b, *twice* the distance of a from D, must be 4; that at c, three times the distance, must be 9; and so on. To proceed practically: Divide E D into a number of equal parts (n) as at a, b, c, &c., fig. 1; then if E A be divided into (n²) parts, each of these parts will be the required unit, 1 of which is the offset at a, 4 at b, 9 at c, and so on. Through the points a' b' c', &c., thus determined, the required curve can be drawn.

II. (Plate III., fig. 2.) BY ORDINATES FROM THE BASE.

Divide the base (half of which is represented by A C) into an even number of equal parts; then if the height or ordinate at centre D C correspond to the square of half the number of those parts ($8 \times 8 = 64$), the

* The terms height (or ordinate at centre) and base have been used instead of abscissa for the former, and double-ordinate for the latter, that the parabola might appear in a more simple light than perhaps it otherwise would have done. Any height can be adopted for the parabola; convenience for scaling off the moments (5), &c., being alone studied.



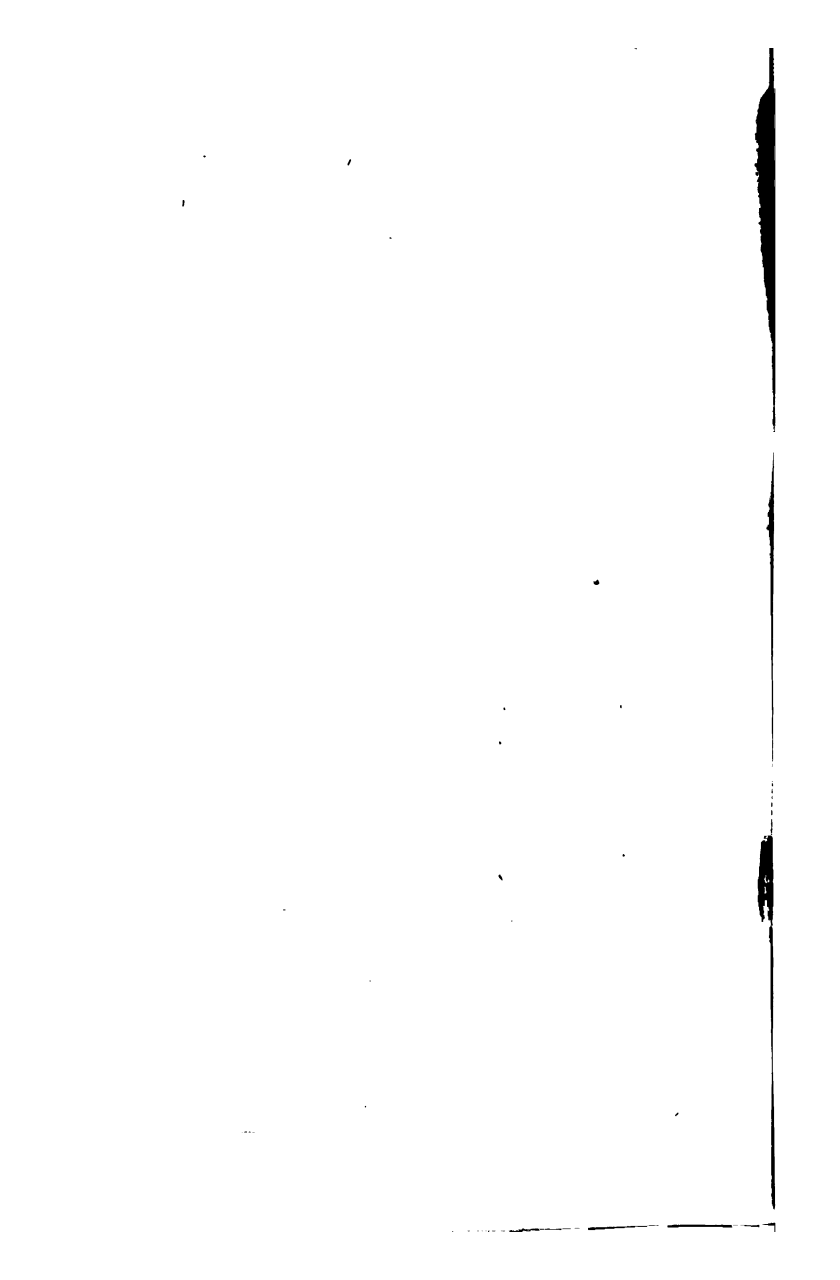

CONSTRUCTION OF PARABOLAS.

Fig. 1.




Fig. 2.




Fig. 3.




Fig. 4.




Fig. 5.



Fig. 6.

To draw a Tangent to a Parabola at any given point





ordinate at any other point (d for instance) will be represented by the product of the numbers of parts in the two segments into which d divides the base ($4 \times 12 = 48$). The parabola may then be drawn through the extremities of the ordinates.

III. (Plate III., fig. 3.) BY THE CONSTRUCTION OF A DIAGRAM.

Draw DE parallel and equal to AC ; divide DE and EA similarly; the end E of EA corresponding to the end D of ED . Through a, b , &c., in ED , draw $aa', bb', &c.$, parallel to DC . Join D to the several points $a' b'$, &c., in EA . The parabola will pass through the intersection of aa' with $D a'$, bb' with $D b'$, &c.

NOTE. If this mode of construction be adopted when the ordinates are required at certain points only (and this will generally be the case in practice), the actual curve need not be drawn, after the points it passes through have been determined.

IV. (Plate III., fig. 4.) BY THE CONSTRUCTION OF A DIAGRAM.

On the base AB describe an isosceles triangle, whose height CH is double that of the required parabola. Divide the two sides AE, EB of the triangle into an even number of equal parts, and draw lines as in the figure. These lines will be tangents to the parabola, which may therefore be readily drawn.

V. (Plate III., fig. 5.) BY MEANS OF A STRING.

Draw ED equal and parallel to AC . Join C to F at the bisection of ED . Make CFG a right angle. Let FG intersect the production of CD . Make $DK = DG$, parallel to FD ; HH is a "straight-edge," against which slides the "set-square" S . A piece of thread or fine string equal in length to the distance AK is fixed, one end at K and the other at the point M , in the set square which will traverse the base AC as the set square slides along. A pencil, P , by which the string is kept tight, and close to the edge of the set square, will describe a true parabola.

TO DRAW A TANGENT TO A PARABOLA AT ANY POINT P . (Plate III., fig. 6.)

Draw PC perpendicular to the axis EC . Make $DE = DC$. Join E to P , and PE will be the required tangent.

* K is the "focus" of the parabola. GG' the directrix.

Standard Works published by LOCKWOOD & CO.,

IRON BRIDGE CONSTRUCTION. — A COMPLETE and PRACTICAL TREATISE on CAST and WROUGHT IRON BRIDGE CONSTRUCTION, including Iron Foundations. By WILLIAM HUMBER, Assoc. Inst. C. E., &c., Author of "Records of Modern Engineering." Second Edition, in 2 Vols. imp. 4to, with 95 double Plates and 237 pages of text, price 6l. 16s. 6d., half morocco.

"A very valuable contribution to the standard literature of civil engineering."—*Civil Engineer and Architect's Journal*.

STRENGTH OF MATERIALS. — A TREATISE ON THE STRENGTH OF MATERIALS. By PETER BARLOW, F.R.S., &c. A New and considerably enlarged Edition, carefully revised by the Author's Sons. Arranged and edited by WILLIAM HUMBER, Assoc. Inst. C. E., &c., Author of "Records of Modern Engineering," &c. &c. Demy 8vo., 400 pp., with 19 large Plates (several of them quite new), and numerous woodcuts, price 18s. cloth.

"One of the first books of reference in existence."—*Artisan*.

"There is no greater authority than Barlow."—*Building News*.

"This edition is worthy of being regarded, for all practical purposes, as an entirely new work."—*Mining Journal*.

STRAINS ON STRUCTURES OF IRON WORK; with Practical Remarks on Iron Construction. By F. W. SHEILDS, M. Inst. C. E. Second Edition, with 5 plates. Royal 8vo., 5s. cloth.

STRENGTH OF CAST IRON, &c.—A PRACTICAL ESSAY on the STRENGTH OF CAST IRON and OTHER METALS. By THOMAS TREDGOLD. Fifth Edition; to which are added EXPERIMENTAL RESEARCHES on the STRENGTH and OTHER PROPERTIES of CAST IRON; by EATON HODKINSON, F.R.S. The whole illustrated with 9 engravings and numerous woodcuts. 8vo, 12s. cloth. *.* HODKINSON, separate, price 6s. cloth.

MATHEMATICS FOR PRACTICAL MEN; being a Common Place Book of Pure and Mixed Mathematics, designed chiefly for the use of Civil Engineers, Architects, and Surveyors. By OLIVIERUS GREGORY, LL.D., &c. Enlarged by HENRY LAW, C. E. Fourth edition, carefully revised and corrected by Professor J. R. YOUNG. With 13 Plates, medium 8vo, 1l. 1s. cloth.

"As a standard work on mathematics it has not been excelled."—*Artisan*.

"One of the most serviceable books to the practical mechanics of the country."—*Building News*.

POCKET BOOK.—WEALE'S ENGINEER'S, ARCHITECT'S, and CONTRACTOR'S POCKET BOOK. Considerably improved, with many additions, and several new Copperplates. Roan tuck, gilt edges, price 6s. [Published annually.]

"A multitude of useful tables, without reference to which the engineer, architect, or contractor could scarcely get through a single day's work."—*Scientific Review*.

"One of the most valuable books of its class. We strongly recommend it."—*Civil Engineer*.

LONDON, April, 1874.

A Catalogue of Books

INCLUDING MANY

NEW & STANDARD WORKS

IN

ENGINEERING, ARCHITECTURE,
AGRICULTURE, MATHEMATICS, MECHANICS,
SCIENCE, &c. &c.

PUBLISHED BY

LOCKWOOD & CO.,

7, STATIONERS'-HALL COURT, LUDGATE HILL, E.C.

ENGINEERING, SURVEYING, &c.

Humber's New Work on Water-Supply.

A COMPREHENSIVE TREATISE on the WATER-SUPPLY of CITIES and TOWNS. By WILLIAM HUMBER, Assoc. Inst. C.E., and M. Inst. M.E. Author of "Cast and Wrought Iron Bridge Construction," &c. &c. This work, it is expected, will contain about 50 Double Plates, and upwards of 300 pages of Text. Imp. 4to, half bound in morocco. *[In the press.]*

* * * *In accumulating information for this volume, the Author has been very liberally assisted by several professional friends, who have made this department of engineering their special study. He has thus been in a position to prepare a work which, within the limits of a single volume, will supply the reader with the most complete and reliable information upon all subjects, theoretical and practical, connected with water supply. Through the kindness of Messrs. Anderson, Bateman, Hawksley, Homersham, Baldwin Latham, Lawson, Milne, Quick, Rawlinson, Simpson, and others, several works, constructed and in course of construction, from the designs of these gentlemen, will be fully illustrated and described.*

AMONGST OTHER IMPORTANT SUBJECTS THE FOLLOWING WILL BE TREATED
IN THE TEXT:—

Historical Sketch of the means that have been proposed and adopted for the Supply of Water.—Water and the Foreign Matter usually associated with it.—Rainfall and Evaporation.—Springs and Subterranean Lakes.—Hydraulics.—The Selection of Sites for Water Works.—Wells.—Reservoirs.—Filtration and Filter Beds.—Reservoir and Filter Bed Appendages.—Pumps and Appendages.—Pumping Machinery.—Culverts and Conduits, Aqueducts, Syphons, &c.—Distribution of Water.—Water Meters and general House Fittings.—Cost of Works for the Supply of Water.—Constant and Intermittent Supply.—Suggestions for preparing Plans, &c. &c., together with a Description of the numerous Works illustrated, viz:—Aberdeen, Bideford, Cockermouth, Dublin, Glasgow, Loch Katrine, Liverpool, Manchester, Rotherham, Sunderland, and several others; with copies of the Contract, Drawings and Specification in each case.

Humber's Modern Engineering. First Series.

A RECORD of the PROGRESS of MODERN ENGINEERING, 1863. Comprising Civil, Mechanical, Marine, Hydraulic, Railway, Bridge, and other Engineering Works, &c. By WILLIAM HUMBER, Assoc. Inst. C.E., &c. Imp. 4to, with 36 Double Plates, drawn to a large scale, and Photographic Portrait of John Hawkshaw, C.E., F.R.S., &c. Price 3*l.* 3*s.* half morocco.

List of the Plates.

NAME AND DESCRIPTION.	PLATES.	NAME OF ENGINEER.
Victoria Station and Roof—L. B. & S. C. Rail	1 to 8	Mr. R. Jacomb Hood, C.E.
Southport Pier	9 and 10	Mr. James Brunlees, C.E.
Victoria Station and Roof—L. C. & D. & G. W. Railways	11 to 15A	Mr. John Fowler, C.E.
Roof of Cremorne Music Hall.....	16	Mr. William Humber, C.E.
Bridge over G. N. Railway	17	Mr. Joseph Cubitt, C.E.
Roof of Station—Dutch Rhenish Railway ..	18 and 19	Mr. Eüschedi, C.E.
Bridge over the Thames—West London Extension Railway	20 to 24	Mr. William Baker, C.E.
Armour Plates	25	Mr. James Chalmers, C.E.
Suspension Bridge, Thames.....	26 to 29	Mr. Peter W. Barlow, C.E.
The Allen Engine	30	Mr. G. T. Porter, M.E.
Suspension Bridge, Avon	31 to 33	Mr. John Hawkshaw, C.E. and W. H. Barlow, C.E.
Underground Railway	34 to 36	Mr. John Fowler, C.E.

With copious Descriptive Letterpress, Specifications, &c.

"Handsomely lithographed and printed. It will find favour with many who desire to preserve in a permanent form copies of the plans and specifications prepared for the guidance of the contractors for many important engineering works."—*Engineer.*

Humber's Modern Engineering. Second Series.

A RECORD of the PROGRESS of MODERN ENGINEERING, 1864; with Photographic Portrait of Robert Stephenson, C.E., M.P., F.R.S., &c. Price 3*l.* 3*s.* half morocco.

List of the Plates.

NAME AND DESCRIPTION.	PLATES.	NAME OF ENGINEER.
Birkenhead Docks, Low Water Basin	1 to 15	Mr. G. F. Lyster, C.E.
Charing Cross Station Roof—C. C. Railway.	16 to 18	Mr. Hawkshaw, C.E.
Digswell Viaduct—Great Northern Railway.	19	Mr. J. Cubitt, C.E.
Robbery Wood Viaduct—Great N. Railway.	20	Mr. J. Cubitt, C.E.
Iron Permanent Way.....	20A	—
Clydach Viaduct—Merthyr, Tredegar, and Abergavenny Railway	21	Mr. Gardner, C.E.
Ebbw Viaduct ditto ditto ditto	22	Mr. Gardner, C.E.
College Wood Viaduct—Cornwall Railway ..	23	Mr. Brunel.
Dublin Winter Palace Roof.....	24 to 26	Messrs. Ordish & Le Feuvre.
Bridge over the Thames—L. C. & D. Railw.	27 to 32	Mr. J. Cubitt, C.E.
Albert Harbour, Greenock	33 to 36	Messrs. Bell & Miller.

With copious Descriptive Letterpress, Specifications, &c.

"A *résumé* of all the more interesting and important works lately completed in Great Britain; and containing, as it does, carefully executed drawings, with full working details will be found a valuable accessory to the profession at large."—*Engineer.*

"Mr. Humber has done the profession good and true service, by the fine collection of examples he has here brought before the profession and the public."—*Practical Mechanic's Journal.*

Humber's Modern Engineering. Third Series.

A RECORD of the PROGRESS of MODERN ENGINEERING, 1865. Imp. 4to, with 40 Double Plates, drawn to a large scale, and Photographic Portrait of J. R. M'Cleane, Esq., late President of the Institution of Civil Engineers. Price 3*l.* 3*s.* half morocco.

List of Plates and Diagrams.

MAIN DRAINAGE, METROPOLIS.

NORTH SIDE.

Map showing Interception of Sewers.
Middle Level Sewer. Sewer under Regent's Canal.
Middle Level Sewer. Junction with Fleet Ditch.
Outfall Sewer. Bridge over River Lea. Elevation.
Outfall Sewer. Bridge over River Lea. Details.
Outfall Sewer. Bridge over River Lea. Details.
Outfall Sewer. Bridge over Marsh Lane, North Woolwich Railway, and Bow and Barking Railway Junction.
Outfall Sewer. Bridge over Bow and Barking Railway. Elevation.
Outfall Sewer. Bridge over Bow and Barking Railway. Details.
Outfall Sewer. Bridge over Bow and Barking Railway. Details.
Outfall Sewer. Bridge over East London Waterworks' Feeder. Elevation.
Outfall Sewer. Bridge over East London Waterworks' Feeder. Details.
Outfall Sewer. Reservoir. Plan.
Outfall Sewer. Reservoir. Section.
Outfall Sewer. Tumbling Bay and Outlet.
Outfall Sewer. Penstocks.

SOUTH SIDE.

Outfall Sewer. Bermondsey Branch.
Outfall Sewer. Bermondsey Branch.
Outfall Sewer. Reservoir and Outlet. Plan.

MAIN DRAINAGE, METROPOLIS,

continued—

Outfall Sewer. Reservoir and Outlet. Details.
Outfall Sewer. Reservoir and Outlet. Details.
Outfall Sewer. Reservoir and Outlet. Details.
Outfall Sewer. Filth Hoist.
Sections of Sewers (North and South Sides).

THAMES EMBANKMENT.

Section of River Wall.
Steam-boat Pier, Westminster. Elevation.
Steam-boat Pier, Westminster. Details.
Landing Stairs between Charing Cross and Waterloo Bridges.
York Gate. Front Elevation.
York Gate. Side Elevation and Details.
Overflow and Outlet at Savoy Street Sewer. Details.
Overflow and Outlet at Savoy Street Sewer. Penstock.
Overflow and Outlet at Savoy Street Sewer. Penstock.
Steam-boat Pier, Waterloo Bridge. Elevation.
Steam-boat Pier, Waterloo Bridge. Details.
Steam-boat Pier, Waterloo Bridge. Details.
Junction of Sewers. Plans and Sections.
Gullies. Plans and Sections.
Rolling Stock.
Granite and Iron Forts.

With copious Descriptive Letterpress, Specifications, &c.

Opinions of the Press.

"Mr. Humber's works—especially his annual 'Record,' with which so many of our readers are now familiar—fill a void occupied by no other branch of literature. . . . The drawings have a constantly increasing value, and whoever desires to possess clear representations of the two great works carried out by our Metropolitan Board will obtain Mr. Humber's last volume."—*Engineering*.

"No engineer, architect, or contractor should fail to preserve these records of works which, for magnitude, have not their parallel in the present day, no student in the profession but should carefully study the details of these great works, which he may be one day called upon to imitate."—*Mechanic's Magazine*.

"A work highly creditable to the industry of its author. . . . The volume is quite an encyclopædia for the study of the student who desires to master the subject of municipal drainage on its scale of greatest development."—*Practical Mechanic Journal*.

Humber's Modern Engineering. Fourth Series.

A RECORD of the PROGRESS of MODERN ENGINEERING, 1866. Imp. 4to, with 36 Double Plates, drawn to a large scale, and Photographic Portrait of John Fowler, Esq., President of the Institution of Civil Engineers. Price 3*l.* 3*s.* half-morocco.

List of the Plates and Diagrams.

NAME AND DESCRIPTION.	PLATES.	NAME OF ENGINEER.
Abbey Mills Pumping Station, Main Drainage, Metropolis.....	1 to 4	Mr. Bazalgette, C.E.
Barrow Docks	5 to 9	Messrs. M'Clean & Stillman, [C.E.]
Manquis Viaduct, Santiago and Valparaíso Railway	10, 11	Mr. W. Loyd, C.E.
Adams' Locomotive, St. Helen's Canal Railw. Cannon Street Station Roof, Charing Cross Railway	12, 13	Mr. H. Cross, C.E.
Read Bridge over the River Moka.....	14 to 16	Mr. J. Hawkshaw, C.E.
Telegraphic Apparatus for Mesopotamia	17, 18	Mr. H. Wakefield, C.E.
Viaduct over the River Wye, Midland Railw. St. Germans Viaduct, Cornwall Railway	19	Mr. Siemens, C.E.
Wrought-Iron Cylinder for Diving Bell.....	20 to 22	Mr. W. H. Barlow, C.E.
Millwall Docks.....	23, 24	Mr. Brunel, C.E.
	25	Mr. J. Cooke, C.E.
	26 to 31	Messrs. J. Fowler, C.E., and William Wilson, C.E.
Milroy's Patent Excavator	32	Mr. Milroy, C.E.
Metropolitan District Railway.....	33 to 38	Mr. J. Fowler, Engineer-in-Chief, and Mr. T. M. Johnson, C.E.
Harbours, Ports, and Breakwaters.....	A to C	—

The Letterpress comprises—

A concluding article on Harbours, Ports, and Breakwaters, with Illustrations and detailed descriptions of the Breakwater at Cherbourg, and other important modern works; an article on the Telegraph Lines of Mesopotamia; a full description of the Wrought-iron Diving Cylinder for Ceylon, the circumstances under which it was used, and the means of working it; full description of the Millwall Docks; &c., &c., &c.

Opinions of the Press.

"Mr. Humber's 'Record of Modern Engineering' is a work of peculiar value, as well to those who design as to those who study the art of engineering construction. It embodies a vast amount of practical information in the form of full descriptions and working drawings of all the most recent and noteworthy engineering works. The plates are excellently lithographed, and the present volume of the 'Record' is not a whit behind its predecessors."—*Mechanics' Magazine*.

"We gladly welcome another year's issue of this valuable publication from the able pen of Mr. Humber. The accuracy and general excellence of this work are well known, while its usefulness in giving the measurements and details of some of the latest examples of engineering, as carried out by the most eminent men in the profession, cannot be too highly prized."—*Artisan*.

"The volume forms a valuable companion to those which have preceded it, and cannot fail to prove a most important addition to every engineering library."—*Mining Journal*.

"No one of Mr. Humber's volumes was bad; all were worth their cost, from the mass of plates from well-executed drawings which they contained. In this respect, perhaps, this last volume is the most valuable that the author has produced."—*Practical Mechanics' Journal*.

Humber's Great Work on Bridge Construction.

A COMPLETE and PRACTICAL TREATISE on CAST and WROUGHT-IRON BRIDGE CONSTRUCTION, including Iron Foundations. In Three Parts—Theoretical, Practical, and Descriptive. By WILLIAM HUMBER, Assoc. Inst. C.E., and M. Inst. M.E. Third Edition, revised and much improved, with 115 Double Plates (20 of which now first appear in this edition), and numerous additions to the Text. In 2 vols. imp. 4to., price 6*l.* 16*s.* 6*d.* half-bound in morocco.

"A very valuable contribution to the standard literature of civil engineering. In addition to elevations, plans, and sections, large scale details are given, which very much enhance the instructive worth of these illustrations. No engineer would willingly be without so valuable a fund of information."—*Civil Engineer and Architect's Journal*.

"The First or Theoretical Part contains mathematical investigations of the principles involved in the various forms now adopted in bridge construction. These investigations are exceedingly complete, having evidently been very carefully considered and worked out to the utmost extent that can be desired by the practical man. The tables are of a very useful character, containing the results of the most recent experiments, and amongst them are some valuable tables of the weight and cost of cast and wrought-iron structures actually erected. The volume of text is amply illustrated by numerous woodcuts, plates, and diagrams; and the plates in the second volume do great credit to both draughtsmen and engravers. In conclusion, we have great pleasure in cordially recommending this work to our readers."—*Artisan*.

"Mr. Humber's stately volumes lately issued—in which the most important bridges erected during the last five years, under the direction of the late Mr. Brunel, Sir W. Cubitt, Mr. Hawkshaw, Mr. Page, Mr. Fowler, Mr. Hemans, and others among our most eminent engineers, are drawn and specified in great detail."—*Engineer*.

Weale's Engineer's Pocket-Book.

THE ENGINEER'S, ARCHITECT'S, and CONTRACTOR'S POCKET-BOOK (LOCKWOOD & Co.'s; formerly WEALE'S). Published Annually. In roan tuck, gilt edges, with 10 Copper-Plates and numerous Woodcuts. Price 6*s.*

"A vast amount of really valuable matter condensed into the small dimensions of a book which is, in reality, what it professes to be—a pocket-book. We cordially recommend the book to the notice of the managers of coal and other mines; to them it will prove a handy book of reference on a variety of subjects more or less intimately connected with their profession."—*Colliery Guardian*.

"Every branch of engineering is treated of, and facts, figures, and data of every kind abound."—*Mechanics' Mag.*

"It contains a large amount of information peculiarly valuable to those for whose use it is compiled. We cordially commend it to the engineering and architectural professions generally."—*Mining Journal*.

Iron Bridges, Girders, Roofs, &c.

A TREATISE on the APPLICATION of IRON to the CONSTRUCTION of BRIDGES, GIRDERS, ROOFS, and OTHER WORKS; showing the Principles upon which such Structures are Designed, and their Practical Application. Especially arranged for the use of Students and Practical Mechanics, all Mathematical Formulæ and Symbols being excluded. By FRANCIS CAMPIN, C.E. With numerous Diagrams. 12mo., cloth boards, 3*s.*

[Recently published.]

"For numbers of young engineers the book is just the cheap, handy, first guide they want."—*Middlesborough Weekly News*.

"Invaluable to those who have not been educated in mathematics."—*Colliery Guardian*.

"Remarkably accurate and well written."—*Artisan*.

Barlow on the Strength of Materials, enlarged.

A TREATISE ON THE STRENGTH OF MATERIALS, with Rules for application in Architecture, the Construction of Suspension Bridges, Railways, &c.; and an Appendix on the Power of Locomotive Engines, and the effect of Inclined Planes and Gradients. By PETER BARLOW, F.R.S. A New Edition, revised by his Sons, P. W. BARLOW, F.R.S., and W. H. BARLOW, F.R.S., to which are added Experiments by HODGKINSON, FAIRBAIRN, and KIRKALDY; an Essay (with Illustrations) on the effect produced by passing Weights over Elastic Bars, by the Rev. ROBERT WILLIS, M.A., F.R.S. And Formulæ for Calculating Girders, &c. The whole arranged and edited by W. HUMBER, Assoc. Inst. C.E., Author of "A Complete and Practical Treatise on Cast and Wrought-Iron Bridge Construction," &c. &c. Demy 8vo, 400 pp., with 19 large Plates, and numerous woodcuts, price 18s. cloth.

"Although issued as the sixth edition, the volume under consideration is worthy of being regarded, for all practical purposes, as an entirely new work . . . the book is undoubtedly worthy of the highest commendation."—*Mining Journal*.

"An increased value has been given to this very valuable work by the addition of a large amount of information, which cannot prove otherwise than highly useful to those who require to consult it. . . . The arrangement and editing of this mass of information has been undertaken by Mr. Humber, who has most ably fulfilled a task requiring special care and ability to render it a success."—*Mechanics Magazine*.

"The best book on the subject which has yet appeared. . . . We know of no work that so completely fulfils its mission."—*English Mechanic*.

"There is not a pupil in an engineering school, an apprentice in an engineer's or architect's office, or a competent clerk of works, who will not recognise in the scientific volume newly given to circulation, an old and valued friend."—*Building News*.

"The standard treatise upon this particular subject."—*Engineer*.

Strains, Formulæ & Diagrams for Calculation of.

A HANDY BOOK for the CALCULATION of STRAINS in GIRDERS and SIMILAR STRUCTURES, and their STRENGTH; consisting of Formulæ and Corresponding Diagrams, with numerous Details for Practical Application, &c. By WILLIAM HUMBER, Assoc. Inst. C.E., &c. Fcap. 8vo, with nearly 100 Woodcuts and 3 Plates, price 7s. 6d. cloth.

"The arrangement of the matter in this little volume is as convenient as it well could be. . . . The system of employing diagrams as a substitute for complex computations is one justly coming into great favour, and in that respect Mr. Humber's volume is fully up to the times."—*Engineering*.

"The formulæ are neatly expressed, and the diagrams good."—*Athenæum*.

"We heartily commend this really handy book to our engineer and architect readers."—*English Mechanic*.

Mechanical Engineering.

A PRACTICAL TREATISE ON MECHANICAL ENGINEERING: comprising Metallurgy, Moulding, Casting, Forging, Tools, Workshop Machinery, Mechanical Manipulation, Manufacture of the Steam Engine, &c. &c. With an Appendix on the Analysis of Iron and Iron Ore, and Glossary of Terms. By FRANCIS CAMPIN, C.E. Illustrated with 91 Woodcuts and 28 Plates of Slotting, Shaping, Drilling, Punching, Shearing, and Riveting Machines—Blast, Refining, and Reverberatory Furnaces—Steam Engines, Governors, Boilers, Locomotives, &c. 8vo, cloth, 12s.

Strains.

THE STRAINS ON STRUCTURES OF IRONWORK; with Practical Remarks on Iron Construction. By F. W. SHEILDS, M. Inst. C.E. Second Edition, with 5 plates. Royal 8vo, 5s. cloth.

CONTENTS.—Introductory Remarks; Beams Loaded at Centre; Beams Loaded at unequal distances between supports; Beams uniformly Loaded; Girders with triangular bracing Loaded at centre; Ditto, Loaded at unequal distances between supports; Ditto, uniformly Loaded; Calculation of the Strains on Girders with triangular Basings; Cantilevers; Continuous Girders; Lattice Girders; Girders with Vertical Struts and Diagonal Ties; Calculation of the Strains on Ditto; Bow and String Girders; Girders of a form not belonging to any regular figure; Plate Girders; Apportionments of Material to Strain; Comparison of different Girders; Proportion of Length to Depth of Girders; Character of the Work; Iron Roofs.

Construction of Iron Beams, Pillars, &c.

IRON AND HEAT, Exhibiting the Principles concerned in the Construction of Iron Beams, Pillars, and Bridge Girders, and the Action of Heat in the Smelting Furnace. By JAMES ARMOUR, C.E. Woodcuts, 12mo, cloth boards, 3s. 6d.; cloth limp, 2s. 6d.

[Recently published.]

"A very useful and thoroughly practical little volume, in every way deserving of circulation amongst working men."—*Mining Journal*.

"No ironworker who wishes to acquaint himself with the principles of his own trade can afford to be without it."—*South Durham Mercury*.

Power in Motion.

POWER IN MOTION: Horse Power, Motion, Toothed Wheel Gearing, Long and Short Driving Bands, Angular Forces, &c. By JAMES ARMOUR, C.E. With 73 Diagrams. 12mo, cloth boards, 3s. 6d.

[Recently published.]

"Numerous illustrations enable the author to convey his meaning as explicitly as it is perhaps possible to be conveyed. The value of the theoretic and practical knowledge imparted cannot well be over estimated."—*Newcastle Weekly Chronicle*.

Metallurgy of Iron.

A TREATISE ON THE METALLURGY OF IRON: containing Outlines of the History of Iron Manufacture, Methods of Assay, and Analyses of Iron Ores, Processes of Manufacture of Iron and Steel, &c. By H. BAUERMAN, F.G.S., Associate of the Royal School of Mines. With numerous Illustrations. Third Edition, revised and much enlarged. 12mo., cloth boards, 5s. 6d.

"Carefully written, it has the merit of brevity and conciseness, as to less important points, while all material matters are very fully and thoroughly entered into."—*Standard*.

Trigonometrical Surveying.

AN OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY, for the Formation of Geographical and Topographical Maps and Plans, Military Reconnaissance, Levelling, &c., with the most useful Problems in Geodesy and Practical Astronomy, and Formulæ and Tables for Facilitating their Calculation. By LIEUT-GENERAL FROME, R.E., late Inspector-General of Fortifications, &c. Fourth Edition, Enlarged, thoroughly Revised, and partly Re-written. By CAPTAIN CHARLES WARREN, R.E., F.G.S. With 19 Plates and 115 Woodcuts. royal 8vo, price 16s. cloth.

Hydraulics.

HYDRAULIC TABLES, CO-EFFICIENTS, and FORMULÆ for finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. By JOHN NEVILLE, Civil Engineer, M.R.I.A. Second Edition, with extensive Additions, New Formulæ, Tables, and General Information on Rain-fall, Catchment-Basins, Drainage, Sewerage, Water Supply for Towns and Mill Power. With numerous Woodcuts, 8vo, 16s. cloth.

. This work contains a vast number of different hydraulic formulæ, and the most extensive and accurate tables yet published for finding the mean velocity of discharge from triangular, quadrilateral, and circular orifices, pipes, and rivers; with experimental results and co-efficients; effects of friction; of the velocity of approach; and of curves, bends, contractions, and expansions; the best form of channel; the drainage effects of long and short weirs, and weir-basins; extent of back-water from weirs; contracted channels; catchment-basins; hydrostatic and hydraulic pressure; water-power, &c. &c.

Levelling.

A TREATISE on the PRINCIPLES and PRACTICE of LEVELLING; showing its Application to Purposes of Railway and Civil Engineering, in the Construction of Roads; with Mr. TELFORD's Rules for the same. By FREDERICK W. SIMMS, F.G.S., M. Inst. C.E. Fifth Edition, very carefully revised, with the addition of Mr. LAW's Practical Examples for Setting out Railway Curves, and Mr. TRAUTWINE's Field Practice of Laying out Circular Curves. With 7 Plates and numerous Woodcuts. 8vo, 8s. 6d. cloth.

. TRAUTWINE on Curves, separate, price 5s.

"One of the most important text-books for the general surveyor, and there is scarcely a question connected with levelling for which a solution would be sought but that would be satisfactorily answered by consulting the volume."—*Mining Journal*.

"The text-book on levelling in most of our engineering schools and colleges."—*Engineer*.

"The publishers have rendered a substantial service to the profession, especially to the younger members, by bringing out the present edition of Mr. Simms's useful work."—*Engineering*.

Tunnelling.

PRACTICAL TUNNELLING; explaining in Detail the Setting out of the Works; Shaft Sinking and Heading Driving; Ranging the Lines and Levelling Under-Ground; Sub-Excavating, Timbering, and the Construction of the Brickwork of Tunnels; with the Amount of Labour required for, and the Cost of the various Portions of the Work. By FREDK. W. SIMMS, F.R.A.S., F.G.S., M. Inst. C.E., Author of "A Treatise on the Principles and Practice of Levelling," &c. &c. Second Edition, revised by W. DAVIS HASKOLL, Civil Engineer, Author of "The Engineer's Field-Book," &c. &c. With 16 large folding Plates and numerous Woodcuts. Imperial 8vo, 1*l*. 1*s*. cloth.

Strength of Cast Iron, &c.

A PRACTICAL ESSAY on the STRENGTH of CAST IRON and OTHER METALS. By the late THOMAS TREDGOLD, Mem. Inst. C.E., Author of "Elementary Principles of Carpentry," &c. Fifth Edition, Edited by EATON HODGKINSON, F.R.S.; to which are added EXPERIMENTAL RESEARCHES on the STRENGTH and OTHER PROPERTIES of CAST IRON. By the EDITOR. The whole Illustrated with 9 Engravings and numerous Woodcuts. 8vo, 12s. cloth.

. HODGKINSON'S EXPERIMENTAL RESEARCHES ON THE STRENGTH AND OTHER PROPERTIES OF CAST IRON may be had separately. With Engravings and Woodcuts. 8vo, price 6s. cloth.

The High-Pressure Steam Engine.

THE HIGH-PRESSURE STEAM ENGINE; an Exposition of its Comparative Merits, and an Essay towards an Improved System of Construction, adapted especially to secure Safety and Economy. By Dr. ERNST ALBAN, Practical Machine Maker, Plau, Mecklenberg. Translated from the German, with Notes, by Dr. POLE, F.R.S., M. Inst. C.E., &c. &c. With 28 fine Plates, 8vo, 16s. 6d. cloth.

"A work like this, which goes thoroughly into the examination of the high-pressure engine, the boiler, and its appendages, &c., is exceedingly useful, and deserves a place in every scientific library."—*Steam Shipping Chronicle*.

Steam Boilers.

A TREATISE ON STEAM BOILERS: their Strength, Construction, and Economical Working. By ROBERT WILSON, late Inspector for the Manchester Steam Users' Association for the Prevention of Steam Boiler Explosions, and for the Attainment of Economy in the Application of Steam. 12mo, cloth boards, 328 pages, price 6s.

Tables of Curves.

TABLES OF TANGENTIAL ANGLES and MULTIPLES for setting out Curves from 5 to 200 Radius. By ALEXANDER BEAZELEY, M. Inst. C.E. Printed on 48 Cards, and sold in a cloth box, waistcoat-pocket size, price 3s. 6d.

"Each table is printed on a small card, which, being placed on the theodolite, leaves the hands free to manipulate the instrument—no small advantage as regards the rapidity of work. They are clearly printed, and compactly fitted into a small case for the pocket—an arrangement that will recommend them to all practical men."—*Engineer*.

"Very handy: a man may know that all his day's work must fall on two of these cards, which he puts into his own card-case, and leaves the rest behind."—*Athenæum*.

Laying Out Curves.

THE FIELD PRACTICE of LAYING OUT CIRCULAR CURVES for RAILROADS. By JOHN C. TRAUTWINE, C.E. (Extracted from SIMMS's Work on Levelling). 8vo, 5s. sewed.

Estimate and Price Book.

THE CIVIL ENGINEER'S AND CONTRACTOR'S ESTIMATE AND PRICE BOOK for Home or Foreign Service: in reference to Roads, Railways, Tramways, Docks, Harbours, Forts, Fortifications, Bridges, Aqueducts, Tunnels, Sewers, Waterworks, Gasworks, Stations, Barracks, Warehouses, &c. &c. &c. With Specifications for Permanent Way, Telegraph Materials, Plant, Maintenance, and Working of a Railway; and a Priced List of Machinery, Plant, Tools, &c. By W. D. HASKOLL, C.E. Plates and Woodcuts. Published annually. 8vo, cloth, 6s.

"As furnishing a variety of data on every conceivable want to civil engineers and contractors, this book has ever stood perhaps unrivalled."—*Architect*.

Surveying (Land and Marine).

LAND AND MARINE SURVEYING, in Reference to the Preparation of Plans for Roads and Railways; Canals, Rivers, Towns' Water Supplies, Docks and Harbours; with Description and Use of Surveying Instruments. By W. DAVIS HASKOLL, C.E., Author of "The Engineer's Field Book," "Examples of Bridge and Viaduct Construction," &c. Demy 8vo, price 12s. 6d. cloth, with 14 folding Plates, and numerous Woodcuts.

"A most useful and well arranged book for the aid of a student. . . . We can strongly recommend it as a carefully-written and valuable text-book."—*Builder*.

"Mr. Haskoll has knowledge and experience, and can so give expression to it as to make any matter on which he writes, clear to the youngest pupil in a surveyor's office."—*Colliery Guardian*.

"A volume which cannot fail to prove of the utmost practical utility. . . . It is one which may be safely recommended to all students who aspire to become clean and expert surveyors."—*Mining Journal*.

Engineering Fieldwork.

THE PRACTICE OF ENGINEERING FIELDWORK, applied to Land and Hydraulic, Hydrographic, and Submarine Surveying and Levelling. Second Edition, revised, with considerable additions, and a Supplementary Volume on WATERWORKS, SEWERS, SEWAGE, and IRRIGATION. By W. DAVIS HASKOLL, C.E. Numerous folding Plates. Demy 8vo, 2 vols. in one, cloth boards, 1l. 1s. (published at 2l. 4s.)

Mining Surveying and Valuing.

THE MINERAL SURVEYOR AND VALUER'S COMPLETE GUIDE, comprising a Treatise on Improved Mining Surveying, with new Traverse Tables; and Descriptions of Improved Instruments; also an Exposition of the Correct Principles of Laying out and Valuing Home and Foreign Iron and Coal Mineral Properties: to which is appended M. THOMAN'S (of the Crédit Mobilier, Paris) TREATISE on COMPOUND INTEREST and ANNUITIES, with LOGARITHMIC TABLES. By WILLIAM LINTERN, Mining and Civil Engineer. 12mo, strongly bound in cloth boards, with four Plates of Diagrams, Plans, &c., price 10s. 6d. [Just published.]

"Contains much valuable information given in a small compass, and which, as far as we have tested it, is thoroughly trustworthy."—*Iron and Coal Trades Review*.

"The matter, arrangement, and illustration of this work are all excellent, and make one of the best of its kind."—*Standard*.

Fire Engineering.

FIRES, FIRE-ENGINES, AND FIRE BRIGADES. With a History of Fire-Engines, their Construction, Use, and Management; Remarks on Fire-Proof Buildings, and the Preservation of Life from Fire; Statistics of the Fire Appliances in English Towns; Foreign Fire Systems; Hints on Fire Brigades, &c., &c. By CHARLES F. T. YOUNG, C.E. With numerous Illustrations, handsomely printed, 544 pp., demy 8vo, price 1*l.* 4*s.* cloth.

"We can most heartily commend this book. . . . It is really the only English work we now have upon the subject."—*Engineering*.

"We strongly recommend the book to the notice of all who are in any way interested in fires, fire-engines, or fire-brigades."—*Mechanics' Magazine*.

Manual of Mining Tools.

MINING TOOLS. For the use of Mine Managers, Agents, Mining Students, &c. By WILLIAM MORGANS, Lecturer on Practical Mining at the Bristol School of Mines. Volume of Text. 12mo. With an Atlas of Plates, containing 235 Illustrations. 4*to*.

Together, price 9*s.* cloth boards.

[*Recently published.*]

"Students in the Science of Mining, and not only they, but subordinate officials in mines, and even Overmen, Captains, Managers, and Viewers may gain practical knowledge and useful hints by the study of Mr. Morgans's Manual."—*Colliery Guardian*.

"A very valuable work, which will tend materially to improve our mining literature."—*Mining Journal*.

Gas and Gasworks.

A TREATISE ON GASWORKS and the PRACTICE of MANUFACTURING and DISTRIBUTING COAL GAS. By SAMUEL HUGHES, C.E. Third Edition, revised by W. RICHARDS, C.E. With 68 Woodcuts, bound in cloth boards, 12mo, price 4*s.*

Waterworks for Cities and Towns.

WATERWORKS for the SUPPLY of CITIES and TOWNS, with a Description of the Principal Geological Formations of England as influencing Supplies of Water. By SAMUEL HUGHES, F.G.S., Civil Engineer. New and enlarged edition, 12mo, cloth boards, with numerous Illustrations, price 5*s.* [*Just published.*]

"One of the most convenient, and at the same time reliable works on a subject, the vital importance of which cannot be over-estimated."—*Bradford Observer*.

Coal and Coal Mining.

COAL AND COAL MINING: a Rudimentary Treatise on. By WARINGTON W. SMYTH, M.A., F.R.S., &c., Chief Inspector of the Mines of the Crown and of the Duchy of Cornwall. New edition, revised and corrected. 12mo., cloth boards, with numerous Illustrations, price 4*s.* 6*d.*

"Every portion of the volume appears to have been prepared with much care, and as an outline is given of every known coal-field in this and other countries, as well as of the two principal methods of working, the book will doubtless interest a very large number of readers."—*Mining Journal*.

"Certainly experimental skill and rule-of-thumb practice would be greatly enriched by the addition of the theoretical knowledge and scientific information which Mr. Warington Smyth communicates in combination with the results of his own experience and personal research."—*Colliery Guardian*.

Field-Book for Engineers.

THE ENGINEER'S, MINING SURVEYOR'S, and CONTRACTOR'S FIELD-BOOK. By W. DAVIS HASKOLL, Civil Engineer. Third Edition, much enlarged, consisting of a Series of Tables, with Rules, Explanations of Systems, and Use of Theodolite for Traverse Surveying and Plotting the Work with minute accuracy by means of Straight Edge and Set Square only; Levelling with the Theodolite, Casting out and Reducing Levels to Datum, and Plotting Sections in the ordinary manner; Setting out Curves with the Theodolite by Tangential Angles and Multiples with Right and Left-hand Readings of the Instrument; Setting out Curves without Theodolite on the System of Tangential Angles by Sets of Tangents and Offsets; and Earthwork Tables to 80 feet deep, calculated for every 6 inches in depth. With numerous wood-cuts, 12mo, price 12s. cloth.

"A very useful work for the practical engineer and surveyor. Every person engaged in engineering field operations will estimate the importance of such a work and the amount of valuable time which will be saved by reference to a set of reliable tables prepared with the accuracy and fulness of those given in this volume."—*Railway News*.

"The book is very handy, and the author might have added that the separate tables of sines and tangents to every minute will make it useful for many other purposes, the genuine traverse tables existing all the same."—*Athenæum*.

"The work forms a handsome pocket volume, and cannot fail, from its portability and utility, to be extensively patronised by the engineering profession."—*Mining Journal*.

"We strongly recommend this second edition of Mr. Haskoll's 'Field Book' to all classes of surveyors."—*Colliery Guardian*.

Earthwork, Measurement and Calculation of.

A MANUAL on EARTHWORK. By ALEX. J. S. GRAHAM, C.E., Resident Engineer, Forest of Dean Central Railway. With numerous Diagrams. 18mo, 2s. 6d. cloth.

"As a really handy book for reference, we know of no work equal to it; and the railway engineers and others employed in the measurement and calculation of earthwork will find a great amount of practical information very admirably arranged, and available for general or rough estimates, as well as for the more exact calculations required in the engineers' contractor's offices."—*Artisan*.

Harbours.

THE DESIGN and CONSTRUCTION of HARBOURS. By THOMAS STEVENSON, F.R.S.E., M.I.C.E. Reprinted and enlarged from the Article "Harbours," in the Eighth Edition of "The Encyclopædia Britannica." With 10 Plates and numerous Cuts. 8vo, 10s. 6d. cloth.

Mathematical and Drawing Instruments.

A TREATISE ON THE PRINCIPAL MATHEMATICAL AND DRAWING INSTRUMENTS employed by the Engineer, Architect, and Surveyor. By FREDERICK W. SIMMS, M. Inst. C.E., Author of "Practical Tunnelling," &c. Third Edition, with numerous Cuts. 12mo, price 3s. 6d. cloth.

Bridge Construction in Masonry, Timber, & Iron.

EXAMPLES OF BRIDGE AND VIADUCT CONSTRUCTION OF MASONRY, TIMBER, AND IRON; consisting of 46 Plates from the Contract Drawings or Admeasurement of select Works. By W. DAVIS HASKOLL, C.E. Second Edition, with the addition of 554 Estimates, and the Practice of Setting out Works, illustrated with 6 pages of Diagrams. Imp. 4to, price 2l. 12s. 6d. half-morocco.

"One of the very few works extant descending to the level of ordinary routine, and treating on the common every-day practice of the railway engineer. . . . A work of the present nature by a man of Mr. Haskoll's experience, must prove invaluable to hundreds. The tables of estimates appended to this edition will considerably enhance its value."—*Engineering*.

Mathematical Instruments, their Construction, &c.

MATHEMATICAL INSTRUMENTS: THEIR CONSTRUCTION, ADJUSTMENT, TESTING, AND USE; comprising Drawing, Measuring, Optical, Surveying, and Astronomical Instruments. By J. F. HEATHER, M.A., Author of "Practical Plane Geometry," "Descriptive Geometry," &c. Enlarged Edition, for the most part entirely rewritten. With numerous Wood-cuts. 12mo, cloth boards, price 5s. [Now ready.]

Oblique Arches.

A PRACTICAL TREATISE ON THE CONSTRUCTION OF OBLIQUE ARCHES. By JOHN HART. Third Edition, with Plates. Imperial 8vo, price 8s. cloth.

Oblique Bridges.

A PRACTICAL AND THEORETICAL ESSAY ON OBLIQUE BRIDGES, with 13 large folding Plates. By GEO. WATSON BUCK, M. Inst. C.E. Second Edition, corrected by W. H. BARLOW, M. Inst. C.E. Imperial 8vo, 12s. cloth.

"The standard text-book for all engineers regarding skew arches, is Mr. Buck's treatise, and it would be impossible to consult a better."—*Engineer*.

Weale's Series of Rudimentary Works.

These highly popular and cheap Series of Books, now comprising nearly Three Hundred distinct Works in almost every department of Science, Art, and Education, are recommended to the notice of Engineers, Architects, Builders, Artisans, and Students generally, as well as to those interested in Workmen's Libraries, Free Libraries, Literary and Scientific Institutions, Colleges, Schools, Science Classes, &c., &c.

. Lists may be had on application to LOCKWOOD & CO.

Weale's Dictionary of Terms in Architecture, Engineering, Art, &c.

A DICTIONARY OF TERMS used in ARCHITECTURE, BUILDING, ENGINEERING, MINING, METALLURGY, ARCHÆOLOGY, the FINE ARTS, &c. By JOHN WEALE. Fourth Edition, enlarged and revised by ROBERT HUNT, F.R.S., Keeper of Mining Records, Editor of "Ure's Dictionary of Arts," &c. 12mo, cloth boards, price 6s. [Just published.]

ARCHITECTURE, &c.

Construction.

THE SCIENCE OF BUILDING: an Elementary Treatise on the Principles of Construction. By E. WYNDHAM TARN, M.A., Architect. Illustrated with 47 Wood Engravings. Demy 8vo, price 8s. 6d. cloth. *[Recently published.]*

"A very valuable book, which we strongly recommend to all students."—*Builder.*

"While Mr. Tarn's valuable little volume is quite sufficiently scientific to answer the purposes intended, it is written in a style that will deservedly make it popular. The diagrams are numerous and exceedingly well executed, and the treatise does credit alike to the author and the publisher."—*Engineer.*

"No architectural student should be without this hand-book of constructional knowledge."—*Architect.*

"The book is very far from being a mere compilation; it is an able digest of information which is only to be found scattered through various works, and contains more really original writing than many putting forth far stronger claims to originality."—*Engineering.*

Beaton's Pocket Estimator.

THE POCKET ESTIMATOR FOR THE BUILDING TRADES, being an easy method of estimating the various parts of a Building collectively, more especially applied to Carpenters' and Joiners' work, priced according to the present value of material and labour. By A. C. BEATON, Author of 'Quantities and Measurements.' 33 Woodcuts. Leather, waistcoat-pocket size. 2s.

Beaton's Builders' and Surveyors' Technical Guide.

THE POCKET TECHNICAL GUIDE AND MEASURER FOR BUILDERS AND SURVEYORS: containing a Complete Explanation of the Terms used in Building Construction, Memoranda for Reference, Technical Directions for Measuring Work in all the Building Trades, with a Treatise on the Measurement of Timbers, and Complete Specifications for Houses, Roads, and Drains. By A. C. BEATON, Author of 'Quantities and Measurements.' With 19 Woodcuts. Leather. Waistcoat pocket size. 2s.

[Now ready.]

Villa Architecture.

A HANDY BOOK OF VILLA ARCHITECTURE; being a Series of Designs for Villa Residences in various Styles. With Detailed Specifications and Estimates. By C. WICKES, Architect, Author of "The Spires and Towers of the Mediæval Churches of England," &c. First Series, consisting of 30 Plates; Second Series, 31 Plates. Complete in 1 vol., 4to, price 2l. 10s. half morocco. Either Series separate, price 1l. 7s. each, half morocco.

"The whole of the designs bear evidence of their being the work of an artistic architect, and they will prove very valuable and suggestive to architects, students, and amateurs."—*Building News.*

The Architect's Guide.

THE ARCHITECT'S GUIDE; or, Office and Pocket Companion for Engineers, Architects, Land and Building Surveyors, Contractors, Builders, Clerks of Works, &c. By W. DAVIS HASKOLL, C.E., R. W. BILLINGS, Architect, F. ROGERS, and P. THOMPSON. With numerous Experiments by G. RENNIE, C.E., &c. Woodcuts, 12mo, cloth, price 3s. 6d.

Vitruvius' Architecture.

THE ARCHITECTURE OF MARCUS VITRUVIUS POLLIO. Translated by JOSEPH GWILT, F.S.A., F.R.A.S. Numerous Plates. 12mo, cloth limp, price 5s.

The Young Architect's Book.

HINTS TO YOUNG ARCHITECTS. By GEORGE WIGHTWICK, Architect, Author of "The Palace of Architecture," &c. &c. Second Edition. With numerous Woodcuts. 8vo, 7s., extra cloth.

Drawing for Builders and Students.

PRACTICAL RULES ON DRAWING for the OPERATIVE BUILDER and YOUNG STUDENT in ARCHITECTURE. By GEORGE PYNE, Author of a "Rudimentary Treatise on Perspective for Beginners." With 14 Plates, 4to, 7s. 6d., boards.

CONTENTS.—I. Practical Rules on Drawing—Outlines. II. Ditto—the Grecian and Roman Orders. III. Practical Rules on Drawing—Perspective. IV. Practical Rules on Light and Shade. V. Practical Rules on Colour, &c. &c.

Drawing for Engineers, &c.

THE WORKMAN'S MANUAL OF ENGINEERING DRAWING. By JOHN MAXTON, Instructor in Engineering Drawing, South Kensington. Second Edition, carefully revised. With upwards of 300 Plates and Diagrams. 12mo, cloth, strongly bound, 4s. 6d. [Now ready.]

"Even accomplished draughtsmen will find in it much that will be of use to them. A copy of it should be kept for reference in every drawing office."—*Engineering.*

"An indispensable book for teachers of engineering drawing."—*Mechanics' Magazine.*

Cottages, Villas, and Country Houses.

DESIGNS and EXAMPLES of COTTAGES, VILLAS, and COUNTRY HOUSES; being the Studies of several eminent Architects and Builders; consisting of Plans, Elevations, and Perspective Views; with approximate Estimates of the Cost of each. In 4to, with 67 plates, price 1l. 1s., cloth.

Builder's Price Book.

THE BUILDER'S AND CONTRACTOR'S PRICE BOOK. (Lockwood & Co.'s) with which is incorporated Atchley's Builder's Price-Book and the Illustrated Price-Book for 1874, containing the present prices of all kinds of Builders' Materials and Labour, and of all Trades connected with Building, with Memoranda and Tables required in making Estimates and taking out quantities, and Lists of the Members of the Metropolitan Board of Works, of Districts, District Officers, and District Surveyors, and the Metropolitan Bye-laws, with Five Plates, containing Plans, Elevations, and Views of Mansions, Villas and Cottages, and a Specification. Crown 8vo, strongly bound, price 4s.

Handbook of Specifications.

THE HANDBOOK OF SPECIFICATIONS; or, **Practical Guide to the Architect, Engineer, Surveyor, and Builder, in drawing up Specifications and Contracts for Works and Constructions.** Illustrated by Precedents of Buildings actually executed by eminent Architects and Engineers. Preceded by a Preliminary Essay, and Skeletons of Specifications and Contracts, &c., &c., and explained by numerous Lithograph Plates and Woodcuts. By Professor THOMAS L. DONALDSON, President of the Royal Institute of British Architects, Professor of Architecture and Construction, University College, London, M.I.B.A., Member of the various European Academies of the Fine Arts. With A REVIEW OF THE LAW OF CONTRACTS, and of the Responsibilities of Architects, Engineers, and Builders. By W. CUNNINGHAM GLEN, Barrister-at-Law, of the Middle Temple. 2 vols., 8vo, with upwards of 1100 pp. of text, and 33 Lithographic Plates, cloth, 2l. 2s. (Published at 4l.)

"In these two volumes of 1,100 pages (together), forty-four specifications of executed works are given, including the specifications for parts of the new Houses of Parliament, by Sir Charles Barry, and for the new Royal Exchange, by Mr. Tite, M.P. The latter, in particular, is a very complete and remarkable document. It embodies, to a great extent, as Mr. Donaldson mentions, 'the bill of quantities, with the description of the works,' and occupies more than 100 printed pages.

"Amongst the other known buildings, the specifications of which are given, are the Wiltshire Lunatic Asylum (Wyatt and Brandon); Tothill Fields Prison (R. Abraham); the City Prison, Holloway (Bunning); the High School, Edinburgh (Hamilton); Clothworkers' Hall, London (Angel); Wellington College, Sandhurst (J. Shaw); Houses in Grosvenor Square, and elsewhere; St. George's Church, Doncaster (Scott); several works of smaller size by the Author, including Messrs. Shaw's Warehouse in Fetter Lane, a very successful elevation; the Newcastle-upon-Tyne Railway Station (J. Dobson); new Westminster Bridge (Page); the High Level Bridge, Newcastle (R. Stephenson); various works on the Great Northern Railway (Brydson); and one French specification for Houses in the Rue de Rivoli, Paris (M.M. Armand, Hittorff, Pellechet, and Rohault de Fleury, architects). The last is a very elaborate composition, occupying seventy pages. The majority of the specifications have illustrations in the shape of elevations and plans.

"We are most glad to have the present work. It is valuable as a record, and more valuable still as a book of precedents.

"About 140 pages of the second volume are appropriated to an exposition of the law in relation to the legal liabilities of engineers, architects, contractors, and builders, by Mr. W. Cunningham Glen, Barrister-at-law; intended rather for those persons than for the legal practitioner. Suffice it, in conclusion, to say in words what our readers will have gathered for themselves from the particulars we have given, that Donaldson's Handbook of Specifications must be bought by all architects."—*Builder*.

Specifications for Practical Architecture.

SPECIFICATIONS FOR PRACTICAL ARCHITECTURE: A Guide to the Architect, Engineer, Surveyor, and Builder; with an Essay on the Structure and Science of Modern Buildings. By FREDERICK ROGERS, Architect. With numerous Illustrations. Demy 8vo, price 15s., cloth.

* * A volume of specifications of a practical character being greatly required, and the old standard work of Alfred Bartholomew being out of print, the author, on the basis of that work, has produced the above. Some of the specifications he has so altered as to bring in the now universal use of concrete, the improvements in drainage, the use of iron, glass, asphalt, and other material. He has also inserted specifications of works that have been erected in his own practice.

Grantham's Iron Ship-Building, enlarged.

ON IRON SHIP-BUILDING ; with Practical Examples and Details. Fifth Edition. Imp. 4to, boards, enlarged from 24 to 40 Plates (21 quite new), including the latest Examples. Together with separate Text, 12mo, cloth limp, also considerably enlarged, By JOHN GRANTHAM, M. Inst. C.E., &c. Price 2*l.* 2*s.* complete.

Description of Plates.

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Hollow and Bar Keels, Stem and Stern Posts. [Pieces.] 2. Side Frames, Floorings, and Bilge 3. Floorings <i>continued</i>—Keelsons, Deck Beams, Gunwales, and Stringers. 4. Gunwales <i>continued</i>—Lower Decks, and Orlop Beams. 4<i>a</i>. Gunwales and Deck Beam Iron. 5. Angle-Iron, T Iron, Z Iron, Bulb Iron, as Rolled for Building. 6. Rivets, shown in section, natural size ; Flush and Lapped Joints, with Single and Double Riveting. 7. Plating, three plans ; Bulkheads and Modes of Securing them. 8. Iron Masts, with Longitudinal and Transverse Sections. 9. Sliding Keel, Water Ballast, Moulding the Frames in Iron Ship Building, Levelling Plates. 10. Longitudinal Section, and Half-breadth Deck Plan of Large Vessels on a reduced Scale. 11. Midship Sections of Three Vessels. 12. <i>Large Vessel</i>, showing Details—<i>Fore End</i> in Section, and End View, with Stern Post, Crutches, &c. 13. <i>Large Vessel</i>, showing Details—<i>After End</i> in Section, with End View, Stern Frame for Screw, and Rudder. 14. <i>Large Vessel</i>, showing Details—<i>Midship Section</i>, half breadth. 15. <i>Machines</i> for Punching and Shearing Plates and Angle-Iron, and for Bending Plates ; Rivet Hearth. 15<i>a</i>. Beam-Bending Machine, Independent Shearing, Punching and Angle-Iron Machine. | <ol style="list-style-type: none"> 15<i>b</i>. Double Lever Punching and Shearing Machine, arranged for cutting Angle and T Iron, with Dividing Table and Engine. 16. <i>Machines</i>.—Garforth's Riveting Machine, Drilling and Counter-Sinking Machine. 16<i>a</i>. Plate Planing Machine. 17. <i>Air Furnace</i> for Heating Plates and Angle-Iron ; Various Tools used in Riveting and Plating. 18. <i>Gunwale</i> ; Keel and Flooring ; Plan for Sheathing with Copper. 18<i>a</i>. Grantham's Improved Plan of Sheathing Iron Ships with Copper. 19. Illustrations of the Magnetic Condition of various Iron Ships. 20. Gray's Floating Compass and Binnacle, with Adjusting Magnets, &c. 21. Corroded Iron Bolt in Frame of Wooden Ship ; Jointing Plates. 22-4. <i>Great Eastern</i>—Longitudinal Sections and Half-breadth Plans—Midship Section, with Details—Section in Engine Room, and Paddle Boxes. 25-6. Paddle Steam Vessel of Steel. 27. <i>Scarborough</i>—Paddle Vessel of Steel. 28-9. Proposed Passenger Steamer. 30. <i>Persian</i>—Iron Screw Steamer. 31. Midship Section of H.M. Steam Frigate, <i>Warrior</i>. 32. Midship Section of H.M. Steam Frigate, <i>Hercules</i>. 33. Stem, Stern, and Rudder of H.M. Steam Frigate, <i>Bellerophon</i>. 34. Midship Section of H.M. Troop Ship, <i>Serapis</i>. 35. Iron Floating Dock. |
|---|--|

"An enlarged edition of an elaborately illustrated work."—*Builder*.

"This edition of Mr. Grantham's work has been enlarged and improved, both with respect to the text and the engravings being brought down to the present period. . . . The practical operations required in producing a ship are described and illustrated with care and precision."—*Mechanics' Magazine*.

"A thoroughly practical work, and every question of the many in relation to iron shipping which admit of diversity of opinion, or have various and conflicting personal interests attached to them, is treated with sober and impartial wisdom and good sense. . . . As good a volume for the instruction of the pupil or student of iron naval architecture as can be found in any language."—*Practical Mechanics' Journal*.

"A very elaborate work. . . . It forms a most valuable addition to the history of iron shipbuilding, while its having been prepared by one who has made the subject his study for many years, and whose qualifications have been repeatedly recognised, will recommend it as one of practical utility to all interested in shipbuilding."—*Army and Navy Gazette*.

CARPENTRY, TIMBER, &c.

Tredgold's Carpentry, new, enlarged, and cheaper Edition.

THE ELEMENTARY PRINCIPLES OF CARPENTRY : a Treatise on the Pressure and Equilibrium of Timber Framing, the Resistance of Timber, and the Construction of Floors, Arches, Bridges, Roofs, Uniting Iron and Stone with Timber, &c. To which is added an Essay on the Nature and Properties of Timber, &c., with Descriptions of the Kinds of Wood used in Building ; also numerous Tables of the Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. By THOMAS TREDGOLD, C.E. Edited by PETER BARLOW, F.R.S. Fifth Edition, corrected and enlarged. With 64 Plates (11 of which now first appear in this edition), Portrait of the Author, and several Woodcuts. In 1 vol., 4to, published at 2*l.* 2*s.*, reduced to 1*l.* 5*s.*, cloth.

"'Tredgold's Carpentry' ought to be in every architect's and every builder's library, and those who do not already possess it ought to avail themselves of the new issue."—*Builder*.

"A work whose monumental excellence must commend it wherever skilful carpentry is concerned. The Author's principles are rather confirmed than impaired by time, and, as now presented, combine the surest base with the most interesting display of progressive science. The additional plates are of great intrinsic value."—*Building News*.

"'Tredgold's Carpentry' has ever held a high position, and the issue of the fifth edition, in a still more improved and enlarged form, will give satisfaction to a very large number of artisans who desire to raise themselves in their business, and who seek to do so by displaying a greater amount of knowledge and intelligence than their fellow-workmen. It is as complete a work as need be desired. To the superior workman the volume will prove invaluable ; it contains treatises written in language which he will readily comprehend."—*Mining Journal*.

Grandy's Timber Tables.

THE TIMBER IMPORTER'S, TIMBER MERCHANT'S, and BUILDER'S STANDARD GUIDE. By RICHARD E. GRANDY. Comprising :—An Analysis of Deal Standards, Home and Foreign, with comparative Values and Tabular Arrangements for Fixing Nett Landed Cost on Baltic and North American Deals, including all intermediate Expenses, Freight, Insurance, Duty, &c., &c. ; together with Copious Information for the Retailer and builder. 12mo, price 7*s.* 6*d.* cloth.

Everything it pretends to be : built up gradually, it leads one from a forest to a mill, and throws in, as a makeweight, a host of material concerning bricks, columns, gables, &c.—all that the class to whom it appeals requires."—*English Mechanic*.

"The only difficulty we have is as to what is NOT in its pages. What we have tested of the contents, taken at random, is invariably correct."—*Illustrated Builder's Journal*.

Tables for Packing-Case Makers.

PACKING-CASE TABLES ; showing the number of Superficial Feet in Boxes or Packing-Cases, from six inches square and upwards. Compiled by WILLIAM RICHARDSON, Accountant. Oblong 4to, cloth, price 3*s.* 6*d.*

"Will save much labour and calculation to packing-case makers and those who use packing-cases."—*Grocer*. "Invaluable labour-saving tables."—*Ironmonger*.

Nicholson's Carpenter's Guide.

THE CARPENTER'S NEW GUIDE; or, BOOK of LINES for CARPENTERS: comprising all the Elementary Principles essential for acquiring a knowledge of Carpentry. Founded on the late PETER NICHOLSON'S standard work. A new Edition, revised by ARTHUR ASHPITEL, F.S.A., together with Practical Rules on Drawing, by GEORGE PYNE. With 74 Plates, 4to, 1*l.* 1*s.* cloth.

Dowsing's Timber Merchant's Companion.

THE TIMBER MERCHANT'S AND BUILDER'S COMPANION; containing New and Copious Tables of the Reduced Weight and Measurement of Deals and Battens, of all sizes, from One to a Thousand Pieces, and the relative Price that each size bears per Lineal Foot to any given Price per Petersburg Standard Hundred; the Price per Cube Foot of Square Timber to any given Price per Load of 50 Feet; the proportionate Value of Deals and Battens by the Standard, to Square Timber by the Load of 50 Feet; the readiest mode of ascertaining the Price of Scantling per Lineal Foot of any size, to any given Figure per Cube Foot. Also a variety of other valuable information. By WILLIAM DOWSING, Timber Merchant. Second Edition. Crown 8vo, 3*s.* cloth.

"Everything is as concise and clear as it can possibly be made. There can be no doubt that every timber merchant and builder ought to possess it."—*Hull Advertiser.*

Timber Freight Book.

THE TIMBER IMPORTERS' AND SHIPOWNERS' FREIGHT BOOK: Being a Comprehensive Series of Tables for the Use of Timber Importers, Captains of Ships, Shipbrokers, Builders, and all Dealers in Wood whatsoever. By WILLIAM RICHARDSON, Timber Broker, author of "Packing Case Tables," &c. Crown 8vo, cloth, price 6*s.*

MECHANICS, &c.

Mechanic's Workshop Companion.

THE OPERATIVE MECHANIC'S WORKSHOP COMPANION, AND THE SCIENTIFIC GENTLEMAN'S PRACTICAL ASSISTANT; comprising a great variety of the most useful Rules in Mechanical Science; with numerous Tables of Practical Data and Calculated Results. By W. TEMPLETON, Author of "The Engineer's, Millwright's, and Machinist's Practical Assistant." Eleventh Edition. with Mechanical Tables for Operative Smiths, Millwrights, Engineers, &c.; together with several Useful and Practical Rules in Hydraulics and Hydrodynamics, a variety of Experimental Results, and an Extensive Table of Powers and Roots. 11 Plates. 12mo, 5*s.* bound. [Recently published.]

"As a text-book of reference, in which mechanical and commercial demands are judiciously met, TEMPLETON'S COMPANION stands unrivalled."—*Mechanics' Magazine.*

"Admirably adapted to the wants of a very large class. It has met with great success in the engineering workshop, as we can testify; and there are a great many men who, in a great measure, owe their rise in life to this little work."—*Building News.*

Engineer's Assistant.

THE ENGINEER'S, MILLWRIGHT'S, and MACHINIST'S PRACTICAL ASSISTANT ; comprising a Collection of Useful Tables, Rules, and Data. Compiled and Arranged, with Original Matter, by W. TEMPLETON. 5th Edition. 18mo, 2s. 6d. cloth.

"So much varied information compressed into so small a space, and published at a price which places it within the reach of the humblest mechanic, cannot fail to command the sale which it deserves. With the utmost confidence we commend this book to the attention of our readers."—*Mechanics' Magazine*.

"Every mechanic should become the possessor of the volume, and a more suitable present to an apprentice to any of the mechanical trades could not possibly be made."—*Building News*.

Designing, Measuring, and Valuing.

THE STUDENT'S GUIDE to the PRACTICE of MEASURING, and VALUING ARTIFICERS' WORKS ; containing Directions for taking Dimensions, Abstracting the same, and bringing the Quantities into Bill, with Tables of Constants, and copious Memoranda for the Valuation of Labour and Materials in the respective Trades of Bricklayer and Slater, Carpenter and Joiner, Painter and Glazier, Paperhanger, &c. With 43 Plates and Woodcuts. Originally edited by EDWARD DOBSON, Architect. New Edition, re-written, with Additions on Mensuration and Construction, and several useful Tables for facilitating Calculations and Measurements. By E. WYNDHAM TARN, M.A., Architect. 8vo, 10s. 6d. cloth. [*Recently published.*]

"This useful book should be in every architect's and builder's office. It contains a vast amount of information absolutely necessary to be known."—*The Irish Builder*.

"The book is well worthy the attention of the student in architecture and surveying, as by the careful study of it his progress in his profession will be much facilitated."—*Mining Journal*.

"We have failed to discover anything connected with the building trade, from excavating foundations to bell-hanging, that is not fully treated upon in this valuable work."—*The Artisan*.

"Mr. Tarn has well performed the task imposed upon him, and has made many further and valuable additions, embodying a large amount of information relating to the technicalities and modes of construction employed in the several branches of the building trade. . . . From the extent of the information which the volume embodies, and the care taken to secure accuracy in every detail, it cannot fail to prove of the highest value to students, whether training in the offices of provincial surveyors, or in those of London practitioners."—*Colliery Guardian*.

"Altogether the book is one which well fulfils the promise of its title-page, and we can thoroughly recommend it to the class for whose use it has been compiled. Mr. Tarn's additions and revisions have much increased the usefulness of the work, and have especially augmented its value to students. Finally, it is only just to the publishers to add that the book has been got up in excellent style, the typography being bold and clear, and the plates very well executed."—*Engineering*.

Superficial Measurement.

THE TRADESMAN'S GUIDE TO SUPERFICIAL MEASUREMENT. Tables calculated from 1 to 200 inches in length, by 1 to 108 inches in breadth. For the use of Architects, Surveyors, Engineers, Timber Merchants, Builders, &c. By JAMES HAWKINGS. Fcp. 3s. 6d. cloth.

MATHEMATICS, &c.

Gregory's Practical Mathematics.

MATHEMATICS for PRACTICAL MEN ; being a Common-place Book of Pure and Mixed Mathematics. Designed chiefly for the Use of Civil Engineers, Architects, and Surveyors. Part I. PURE MATHEMATICS—comprising Arithmetic, Algebra, Geometry, Mensuration, Trigonometry, Conic Sections, Properties of Curves. Part II. MIXED MATHEMATICS—comprising Mechanics in general, Statics, Dynamics, Hydrostatics, Hydrodynamics, Pneumatics, Mechanical Agents, Strength of Materials. With an Appendix of copious Logarithmic and other Tables. By OLINTHUS GREGORY, LL.D., F.R.A.S. Enlarged by HENRY LAW, C.E. 4th Edition, carefully revised and corrected by J. R. YOUNG, formerly Professor of Mathematics, Belfast College ; Author of "A Course of Mathematics," &c. With 13 Plates. Medium 8vo, 1*l.* 1*s.* cloth.

"As a standard work on mathematics it has not been excelled."—*Artisan*.

"The engineer or architect will here find ready to his hand, rules for solving nearly every mathematical difficulty that may arise in his practice. As a moderate acquaintance with arithmetic, algebra, and elementary geometry is absolutely necessary to the proper understanding of the most useful portions of this book, the author very wisely has devoted the first three chapters to those subjects, so that the most ignorant may be enabled to master the whole of the book, without aid from any other. The rules are in all cases explained by means of examples, in which every step of the process is clearly worked out."—*Builder*.

"One of the most serviceable books to the practical mechanics of the country. . . . The edition of 1847 was fortunately entrusted to the able hands of Mr. Law, who revised it thoroughly, re-wrote many chapters, and added several sections to those which had been rendered imperfect by advanced knowledge. On examining the various and many improvements which he introduced into the work, they seem almost like a new structure on an old plan, or rather like the restoration of an old ruin, not only to its former substance, but to an extent which meets the larger requirements of modern times. . . . In the edition just brought out, the work has again been revised by Professor Young. He has modernised the notation throughout, introduced a few paragraphs here and there, and corrected the numerous typographical errors which have escaped the eyes of the former Editor. The book is now as complete as it is possible to make it. . . . We have carried our notice of this book to a greater length than the space allowed us justified, but the experiments it contains are so interesting, and the method of describing them so clear, that we may be excused for overstepping our limit. It is an instructive book for the student, and a Text-book for him who having once mastered the subjects it treats of, needs occasionally to refresh his memory upon them."—*Building News*.

The Metric System.

A SERIES OF METRIC TABLES, in which the British Standard Measures and Weights are compared with those of the Metric System at present in use on the Continent. By C. H. DOWLING, C. E. Second Edition, revised and enlarged. 8vo, 10*s.* 6*d.* strongly bound.

"Mr. Dowling's Tables, which are well put together, come just in time as a ready reckoner for the conversion of one system into the other."—*Athenæum*.

"Their accuracy has been certified by Professor Airy, the Astronomer-Royal."—*Builder*.

"Resolution 8.—That advantage will be derived from the recent publication of Metric Tables, by C. H. Dowling, C.E."—*Report of Section F, British Association, Bath*.

Inwood's Tables, greatly enlarged and improved.

TABLES FOR THE PURCHASING of ESTATES, Freehold, Copyhold, or Leasehold; Annuities, Advowsons, &c., and for the Renewing of Leases held under Cathedral Churches, Colleges, or other corporate bodies; for Terms of Years certain, and for Lives; also for Valuing Reversionary Estates, Deferred Annuities, Next Presentations, &c., together with Smart's Five Tables of Compound Interest, and an Extension of the same to Lower and Intermediate Rates. By WILLIAM INWOOD, Architect. The 19th edition, with considerable additions, and new and valuable Tables of Logarithms for the more Difficult Computations of the Interest of Money, Discount, Annuities, &c., by M. FÉDOR THOMAN, of the Société Crédit Mobilier of Paris. 12mo, 8s. cloth.

* * *This edition (the 19th) differs in many important particulars from former ones. The changes consist, first, in a more convenient and systematic arrangement of the original Tables, and in the removal of certain numerical errors which a very careful revision of the whole has enabled the present editor to discover; and secondly, in the extension of practical utility conferred on the work by the introduction of Tables now inserted for the first time. This new and important matter is all so much actually added to INWOOD'S TABLES; nothing has been abstracted from the original collection: so that those who have been long in the habit of consulting INWOOD for any special professional purpose will, as heretofore, find the information sought still in its pages.*

"Those interested in the purchase and sale of estates, and in the adjustment of compensation cases, as well as in transactions in annuities, life insurances, &c., will find the present edition of eminent service."—*Engineering*.

Geometry for the Architect, Engineer, &c.

PRACTICAL GEOMETRY, for the Architect, Engineer, and Mechanic; giving Rules for the Delineation and Application of various Geometrical Lines, Figures and Curves. By E. W. TARN, M.A., Architect, Author of "The Science of Building," &c. With 164 Illustrations. Demy 8vo. 12s. 6d.

"No book with the same objects in view has ever been published in which the clearness of the rules laid down and the illustrative diagrams have been so satisfactory."—*Scotsman*.

Compound Interest and Annuities.

THEORY of COMPOUND INTEREST and ANNUITIES; with Tables of Logarithms for the more Difficult Computations of Interest, Discount, Annuities, &c., in all their Applications and Uses for Mercantile and State Purposes. With an elaborate Introduction. By FÉDOR THOMAN, of the Société Crédit Mobilier, Paris. 12mo, cloth, 5s.

"A very powerful work, and the Author has a very remarkable command of his subject."—*Professor A. de Morgan*.

"We recommend it to the notice of actuaries and accountants."—*Athenæum*.

SCIENCE AND ART.

The Military Sciences.

AIDE-MÉMOIRE to the MILITARY SCIENCES. Framed from Contributions of Officers and others connected with the different Services. Originally edited by a Committee of the Corps of Royal Engineers. Second Edition, most carefully revised by an Officer of the Corps, with many additions; containing nearly 350 Engravings and many hundred Woodcuts. 3 vols. royal 8vo, extra cloth boards, and lettered, price 4*l.* 10*s.*

"A compendious encyclopædia of military knowledge, to which we are greatly indebted."—*Edinburgh Review*.

"The most comprehensive work of reference to the military and collateral sciences. Among the list of contributors, some seventy-seven in number, will be found names of the highest distinction in the services."—*Volunteer Service Gazette*.

Field Fortification.

A TREATISE on FIELD FORTIFICATION, the ATTACK of FORTRESSES, MILITARY, MINING, and RECONNOITRING. By Colonel I. S. MACAULAY, late Professor of Fortification in the R. M. A., Woolwich. Sixth Edition, crown 8vo, cloth, with separate Atlas of 12 Plates, price 12*s.* complete.

Naval Science. Edited by E. J. Reed, C.B.

NAVAL SCIENCE: a Quarterly Magazine for Promoting the Improvement of Naval Architecture, Marine Engineering, Steam Navigation, and Seamanship. Edited by E. J. REED, C.B., late Chief Constructor of the Navy. Copiously illustrated. Price 2*s.* 6*d.* No. 7, October, 1873, now ready. (Vol. I., containing Nos. 1 to 3, may also be had, cloth boards, price 10*s.* 6*d.*)

* * * *The Contributors include the most Eminent Authorities in the several branches of the above subjects.*

Dye-Wares and Colours.

THE MANUAL of COLOURS and DYE-WARES: their Properties, Applications, Valuation, Impurities, and Sophistications. For the Use of Dyers, Printers, Dry Salters, Brokers, &c. By J. W. SLATER. Post 8vo, cloth, price 7*s.* 6*d.*

"A complete encyclopædia of the *materia tinctoria*. The information given respecting each article is full and precise, and the methods of determining the value of articles such as these, so liable to sophistication, are given with clearness, and are practical as well as valuable."—*Chemist and Druggist*.

Electricity.

A MANUAL of ELECTRICITY; including Galvanism, Magnetism, Diamagnetism, Electro-Dynamics, Magneto-Electricity, and the Electric Telegraph. By HENRY M. NOAD, Ph.D., F.C.S., Lecturer on Chemistry at St. George's Hospital. Fourth Edition, entirely rewritten. Illustrated by 500 Woodcuts. 8vo, 1*l.* 4*s.* cloth.

"The commendations already bestowed in the pages of the *Lancet* on the former editions of this work are more than ever merited by the present. The accounts given of electricity and galvanism are not only complete in a scientific sense, but, which is a rarer thing, are popular and interesting."—*Lancet*.

Text-Book of Electricity.

THE STUDENT'S TEXT-BOOK OF ELECTRICITY: including Magnetism, Voltaic Electricity, Electro-Magnetism, Diamagnetism, Magneto-Electricity, Thermo-Electricity, and Electric Telegraphy. Being a Condensed Résumé of the Theory and Application of Electrical Science, including its latest Practical Developments, particularly as relating to Aërial and Submarine Telegraphy. By HENRY M. NOAD, Ph.D., Lecturer on Chemistry at St. George's Hospital. Post 8vo, 400 Illustrations, 12s. 6d. cloth.

"We can recommend Dr. Noad's book for clear style, great range of subject, a good index, and a plethora of woodcuts."—*Athenæum*.

"A most elaborate compilation of the facts of electricity and magnetism, and of the theories which have been advanced concerning them."—*Popular Science Review*.

"Clear, compendious, compact, well illustrated, and well printed."—*Lancet*.

"We can strongly recommend the work, as an admirable text-book, to every student—beginner or advanced—of electricity."—*Engineering*.

"Nothing of value has been passed over, and nothing given but what will lead to a correct, and even an exact, knowledge of the present state of electrical science."—*Mechanics' Magazine*.

"We know of no book on electricity containing so much information on experimental facts as this does, for the size of it, and no book of any size that contains so complete a range of facts."—*English Mechanic*.

Rudimentary Magnetism.

RUDIMENTARY MAGNETISM: being a concise exposition of the general principles of Magnetical Science, and the purposes to which it has been applied. By Sir W. SNOW HARRIS, F.R.S. New and enlarged Edition, with considerable additions by Dr. NOAD, Ph.D. With 165 Woodcuts. 12mo, cloth, 4s. 6d.

"There is a good index, and this volume of 412 pages may be considered the best possible manual on the subject of magnetism."—*Mechanics' Magazine*.

"As concise and lucid an exposition of the phenomena of magnetism as we believe it is possible to write."—*English Mechanic*.

"Not only will the scientific student find this volume an invaluable book of reference, but the general reader will find in it as much to interest as to inform his mind. Though a strictly scientific work, its subject is handled in a simple and readable style."—*Illustrated Review*.

Chemical Analysis.

THE COMMERCIAL HANDBOOK of CHEMICAL ANALYSIS; or Practical Instructions for the determination of the Intrinsic or Commercial Value of Substances used in Manufactures, in Trades, and in the Arts. By A. NORMANDY, Author of "Practical Introduction to Rose's Chemistry," and Editor of Rose's "Treatise of Chemical Analysis." Illustrated with Woodcuts. (A new Edition of this work, revised by Dr. Noad, is in preparation.)

We recommend this book to the careful perusal of every one; it may be truly termed to be of universal interest, and we strongly recommend it to our readers as a guide, alike indispensable to the housewife as to the pharmaceutical practitioner."—*Medical Times*.

"The very best work on the subject the English press has yet produced."—*Mechanics' Magazine*.

Science and Art.

THE YEAR-BOOK of FACTS in SCIENCE and ART; exhibiting the most important Improvements and Discoveries of the Past Year in Mechanics and the Useful Arts, Natural Philosophy, Electricity, Chemistry, Zoology and Botany, Geology and Mineralogy, Meteorology and Astronomy. By JOHN TIMBS, F.S.A., Author of "Curiosities of Science," "Things not Generally Known," &c. With Steel Portrait and Vignette. Fcap. 5s. cloth.

* * *This work, published annually, records the proceedings of the principal scientific societies, and is indispensable to all who wish to possess a faithful record of the latest novelties in science and the arts.*

The back Volumes, from 1861 to 1874, each containing a Steel Portrait, and an extra Volume for 1862, with Photograph, may still be had, price 5s. each.

"Persons who wish for a concise annual summary of important scientific events will find their desire in the 'Year Book of Facts.'—*Athenæum*.

"The standard work of its class. Mr. Timbs's 'Year Book' is always full of suggestive and interesting matter, and is an excellent *résumé* of the year's progress in the sciences and the arts."—*Builder*.

"A correct exponent of scientific progress . . . a record of abiding interest. If anyone wishes to know what progress science has made, or what has been done in any branch of art during the past year, he has only to turn to Mr. Timbs's pages, and is sure to obtain the required information."—*Mechanics' Magazine*.

"There is not a more useful or more interesting compilation than the 'Year Book of Facts.' . . . The discrimination with which Mr. Timbs selects his facts, and the admirable manner in which he condenses into a comparatively short space all the salient features of the matters which he places on record, are deserving of great praise."—*Railway News*.

Science and Scripture.

SCIENCE ELUCIDATIVE OF SCRIPTURE, AND NOT ANTAGONISTIC TO IT; being a Series of Essays on—1. Alleged Discrepancies; 2. The Theory of the Geologists and Figure of the Earth; 3. The Mosaic Cosmogony; 4. Miracles in general—Views of Hume and Powell; 5. The Miracle of Joshua—Views of Dr. Colenso: The Supernaturally Impossible; 6. The Age of the Fixed Stars—their Distances and Masses. By Professor J. R. YOUNG, Author of "A Course of Elementary Mathematics," &c. &c. Fcap. 8vo, price 5s. cloth lettered.

"Professor Young's examination of the early verses of Genesis, in connection with modern scientific hypotheses, is excellent."—*English Churchman*.

"Distinguished by the true spirit of scientific inquiry, by great knowledge, by keen logical ability, and by a style peculiarly clear, easy, and energetic."—*Nonconformist*.

"No one can rise from its perusal without being impressed with a sense of the singular weakness of modern scepticism."—*Baptist Magazine*.

"A valuable contribution to controversial theological literature."—*City Press*.

Practical Philosophy.

A SYNOPSIS of PRACTICAL PHILOSOPHY. By the R. JOHN CARR, M.A., late Fellow of Trin. Coll., Cambridge. Second Edition. 18mo, 5s. cloth.

Dr. Lardner's Museum of Science and Art.

THE MUSEUM OF SCIENCE AND ART. Edited by DIONYSIUS LARDNER, D.C.L., formerly Professor of Natural Philosophy and Astronomy in University College, London. CONTENTS: The Planets; are they inhabited Worlds?—Weather Prognostics—Popular Fallacies in Questions of Physical Science—Latitudes and Longitudes—Lunar Influences—Meteoric Stones and Shooting Stars—Railway Accidents—Light—Common Things:—Air—Locomotion in the United States—Cometary Influences—Common Things: Water—The Potter's Art—Common Things: Fire—Locomotion and Transport, their Influence and Progress—The Moon—Common Things: The Earth—The Electric Telegraph—Terrestrial Heat—The Sun—Earthquakes and Volcanoes—Barometer, Safety Lamp, and Whitworth's Micrometric Apparatus—Steam—The Steam Engine—The Eye—The Atmosphere—Time—Common Things: Pumps—Common Things: Spectacles, the Kaleidoscope—Clocks and Watches—Microscopic Drawing and Engraving—Locomotive—Thermometer—New Planets: Leverrier and Adams's Planet—Magnitude and Minuteness—Common Things: The Almanack—Optical Images—How to observe [the Heavens—Common Things: the Looking-glass—Stellar Universe—The Tides—Colour—Common Things: Man—Magnifying Glasses—Instinct and Intelligence—The Solar Microscope—The Camera Lucida—The Magic Lantern—The Camera Obscura—The Microscope—The White Ants: their Manners and Habits—The Surface of the Earth, or First Notions of Geography—Science and Poetry—The Bee—Steam Navigation—Electro-Motive Power—Thunder, Lightning, and the Aurora Borealis—The Printing Press—The Crust of the Earth—Comets—The Stereoscope—The Pre-Adamite Earth—Eclipses—Sound. With upwards of 1200 Engravings on Wood. In 6 Double Volumes, handsomely bound in cloth, gilt, red edges, price £1 1s.

"The 'Museum of Science and Art' is the most valuable contribution that has ever been made to the Scientific Instruction of every class of society."—*Sir David Brewster in the North British Review.*

"Whether we consider the liberality and beauty of the illustrations, the charm of the writing, or the durable interest of the matter, we must express our belief that there is hardly to be found among the new books, one that would be welcomed by people of so many ages and classes as a valuable present."—*Examiner.*

* * *Separate books formed from the above, suitable for Workmen's Libraries, Science Classes, &c.*

COMMON THINGS EXPLAINED. With 233 Illustrations, 5s. cloth.

THE ELECTRIC TELEGRAPH POPULARIZED. 100 Illustrations, 1s. 6d. cloth.

THE MICROSCOPE. With 147 Illustrations, 2s. cloth.

POPULAR GEOLOGY. With 201 Illustrations, 2s. 6d. cloth.

POPULAR PHYSICS. With 85 Illustrations. 2s. 6d. cloth.

POPULAR ASTRONOMY. With 182 Illustrations, 4s. 6d. cloth.

STEAM AND ITS USES. With 89 Illustrations, 2s. cloth.

THE BEE AND WHITE ANTS. With 135 Illustrations, cloth.

DR. LARDNER'S SCIENTIFIC HANDBOOKS.

Astronomy.

THE HANDBOOK OF ASTRONOMY. By DIONYSIUS LARDNER, D.C.L., formerly Professor of Natural Philosophy and Astronomy in University College, London. Third Edition. Revised and Edited by EDWIN DUNKEN, F.R.A.S., Superintendent of the Altazimuth Department, Royal Observatory, Greenwich. With 37 plates and upwards of 100 Woodcuts. In 1 vol., small 8vo, cloth, 550 pages, price 7s. 6d.

"We can cordially recommend it to all those who desire to possess a complete manual of the science and practice of astronomy."—*Astronomical Reporter*.

Optics.

THE HANDBOOK OF OPTICS. New Edition. Edited by T. OLVER HARDING, B.A. Lond., of University College, London. With 298 Illustrations. Small 8vo, cloth, 448 pages, price 5s.

Electricity.

THE HANDBOOK of ELECTRICITY, MAGNETISM, and ACOUSTICS. New Edition. Edited by GEO. CAREY FOSTER, B.A., F.C.S. With 400 Illustrations. Small 8vo, cloth, price 5s.

"The book could not have been entrusted to any one better calculated to preserve the terse and lucid style of Lardner, while correcting his errors and bringing up his work to the present state of scientific knowledge."—*Popular Science Review*.

Mechanics.

THE HANDBOOK OF MECHANICS. [Reprinting.]

Hydrostatics.

THE HANDBOOK of HYDROSTATICS and PNEUMATICS. New Edition, Revised, and Enlarged by BENJAMIN LOEWY, F.R.A.S. With numerous Illustrations. 5s. [Just published.]

Heat.

THE HANDBOOK OF HEAT. New Edition, Re-written and Enlarged. By BENJAMIN LOEWY, F.R.A.S. [Preparing]

Animal Physics.

THE HANDBOOK OF ANIMAL PHYSICS. With 520 Illustrations. New edition, small 8vo, cloth, 7s. 6d. 732 pages. [Just published.]

Electric Telegraph.

THE ELECTRIC TELEGRAPH. New Edition. Revised and Re-written by E. B. BRIGHT, F.R.A.S. 140 Illustrations. Small 8vo, 3s. 6d. cloth.

"One of the most readable books extant on the Electric Telegraph."—*Eng. Mechanic*.

NATURAL PHILOSOPHY FOR SCHOOLS. By DR. LARDNER. 328 Illustrations. Fifth Edition. 1 vol. 3s. 6d. cloth.

"A very convenient class-book for junior students in private schools. It is intended to convey, in clear and precise terms, general notions of all the principal divisions of Physical Science."—*British Quarterly Review*.

ANIMAL PHYSIOLOGY FOR SCHOOLS. By DR. LARDNER.

With 190 Illustrations. Second Edition. 1 vol. 3s. 6d. cloth.

"Clearly written, well arranged, and excellently illustrated."—*Gardener's Chronicle*.

Geology and Genesis Harmonised.

THE TWIN RECORDS of CREATION; or, Geology and Genesis, their Perfect Harmony and Wonderful Concord. By GEORGE W. VICTOR LE VAUX. With numerous Illustrations. Fcap. 8vo, price 5s. cloth.

"We can recommend Mr. Le Vaux as an able and interesting guide to a popular appreciation of geological science."—*Spectator*.

"The author combines an unbounded admiration of science with an unbounded admiration of the Written Record. The two impulses are balanced to a nicety; and the consequence is, that difficulties, which to minds less evenly poised, would be serious, find immediate solutions of the happiest kinds."—*London Review*.

"Vigorously written, reverent in spirit, stored with instructive geological facts, and designed to show that there is no discrepancy or inconsistency between the Word and the works of the Creator. The future of Nature, in connexion with the glorious destiny of man, is vividly conceived."—*Watchman*.

"No real difficulty is shirked, and no sophistry is left unexposed."—*The Rock*.

Geology, Physical.

PHYSICAL GEOLOGY. (Partly based on Major-General Portlock's Rudiments of Geology.) By RALPH TATE, A.L.S., F.G.S. Numerous Woodcuts. 12mo, 2s. [Ready.]

Geology, Historical.

HISTORICAL GEOLOGY. (Partly based on Major-General Portlock's Rudiments of Geology.) By RALPH TATE, A.L.S., F.G.S. Numerous Woodcuts. 12mo, 2s. 6d. [Ready.]

** Or PHYSICAL and HISTORICAL GEOLOGY, bound in One Volume, price 5s.

Wood-Carving.

INSTRUCTIONS in WOOD-CARVING, for Amateurs; with Hints on Design. By A LADY. In emblematic wrapper, handsomely printed, with Ten large Plates, price 2s. 6d.

"The handicraft of the wood-carver, so well as a book can impart it, may be learnt from 'A Lady's' publication."—*Athenæum*.

"A real practical guide. It is very complete."—*Literary Churchman*.

"The directions given are plain and easily understood, and it forms a very good introduction to the practical part of the carver's art."—*English Mechanic*.

Popular Work on Painting.

PAINTING POPULARLY EXPLAINED; with Historical Sketches of the Progress of the Art. By THOMAS JOHN GULLICK, Painter, and JOHN TIMBS, F.S.A. Second Edition, revised and enlarged. With Frontispiece and Vignette. In small 8vo, 6s. cloth.

** This Work has been adopted as a Prize-book in the Schools of Art at South Kensington.

"A work that may be advantageously consulted. Much may be learned, even by those who fancy they do not require to be taught, from the careful perusal of this pretending but comprehensive treatise."—*Art Journal*.

"A valuable book, which supplies a want. It contains a large amount of original matter, agreeably conveyed, and will be found of value, as well by the young artist seeking information as by the general reader. We give a cordial welcome to the book, and augur for it an increasing reputation."—*Builder*.

"This volume is one that we can heartily recommend to all who are desirous of understanding what they admire in a good painting."—*Daily News*.

Delamotte's Works on Illumination & Alphabets.

A PRIMER OF THE ART OF ILLUMINATION ; for the use of Beginners : with a Rudimentary Treatise on the Art, Practical Directions for its Exercise, and numerous Examples taken from Illuminated MSS., printed in Gold and Colours. By F. DELAMOTTE. Small 4to, price 9s. Elegantly bound, cloth antique.

"A handy book, beautifully illustrated ; the text of which is well written, and calculated to be useful. . . . The examples of ancient MSS. recommended to the student, which, with much good sense, the author chooses from collections accessible to all, are selected with judgment and knowledge, as well as taste!"—*Athenæum*.

ORNAMENTAL ALPHABETS, ANCIENT and MEDIÆVAL ; from the Eighth Century, with Numerals ; including Gothic, Church-Text, large and small, German, Italian, Arabesque, Initials for Illumination, Monograms, Crosses, &c. &c., for the use of Architectural and Engineering Draughtsmen, Missal Painters, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. &c. &c. Collected and engraved by F. DELAMOTTE, and printed in Colours. Royal 8vo, oblong, price 4s. cloth.

"A well-known engraver and draughtsman has enrolled in this useful book the result of many years' study and research. For those who insert enamelled sentences round gilded chalices, who blazon shop legends over shop-doors, who letter church walls with pithy sentences from the Decalogue, this book will be useful."—*Athenæum*.

EXAMPLES OF MODERN ALPHABETS, PLAIN and ORNAMENTAL ; including German, Old English, Saxon, Italic, Perspective, Greek, Hebrew, Court Hand, Engrossing, Tuscan, Riband, Gothic, Rustic, and Arabesque ; with several Original Designs, and an Analysis of the Roman and Old English Alphabets, large and small, and Numerals, for the use of Draughtsmen, Surveyors, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. Collected and engraved by F. DELAMOTTE, and printed in Colours. Royal 8vo, oblong, price 4s. cloth.

"To artists of all classes, but more especially to architects and engravers, this very handsome book will be invaluable. There is comprised in it every possible shape into which the letters of the alphabet and numerals can be formed, and the talent which has been expended in the conception of the various plain and ornamental letters is wonderful."—*Standard*.

MEDIÆVAL ALPHABETS AND INITIALS FOR ILLUMINATORS. By F. DELAMOTTE, Illuminator, Designer, and Engraver on Wood. Containing 21 Plates, and Illuminated Title, printed in Gold and Colours. With an Introduction by J. WILLIS BROOKS. Small 4to, 6s. cloth gilt.

"A volume in which the letters of the alphabet come forth glorified in gilding and all the colours of the prism interwoven and intertwined and intermingled, sometimes with a sort of rainbow arabesque. A poem emblazoned in these characters would be only comparable to one of those delicious love letters symbolized in a bunch of flowers well selected and cleverly arranged."—*Sun*.

THE EMBROIDERER'S BOOK OF DESIGN ; containing Initials, Emblems, Cyphers, Monograms, Ornamental Borders, Ecclesiastical Devices, Mediæval and Modern Alphabets, and Nation Emblems. Collected and engraved by F. DELAMOTTE, and printed in Colours. Oblong royal 8vo, 2s. 6d. in ornamental board

AGRICULTURE, &c.

Youatt and Burn's Complete Grazier.

THE COMPLETE GRAZIER, and FARMER'S and CATTLE-BREEDER'S ASSISTANT. A Compendium of Husbandry. By WILLIAM YOUATT, ESQ., V.S. 11th Edition, enlarged by ROBERT SCOTT BURN, Author of "The Lessons of My Farm," &c. One large 8vo volume, 784 pp. with 215 Illustrations. 1*l*. 1*s*. half-bd.

CONTENTS.

On the Breeding, Rearing, Fattening, and General Management of Neat Cattle.—Introductory View of the different Breeds of Neat Cattle in Great Britain.—Comparative View of the different Breeds of Neat Cattle.—General Observations on Buying and Stocking a Farm with Cattle.—The Bull.—The Cow.—Treatment and Rearing of Calves.—Feeding of Calves for Veal.—Steers and Draught Oxen.—Grazing Cattle.—Summer Soiling Cattle.—Winter Box and Stall-feeding Cattle.—Artificial Food for Cattle.—Preparation of Food.—Sale of Cattle.

On the Economy and Management of the Dairy.—Milch Kine.—Pasture and other Food best calculated for Cows, as it regards their Milk.—Situation and Buildings proper for a Dairy, and the proper Dairy Utensils.—Management of Milk and Cream, and the Making and Preservation of Butter.—Making and Preservation of Cheese.—Produce of a Dairy.

On the Breeding, Rearing, and Management of Farm-horses.—Introductory and Comparative View of the different Breeds of Farm-horses.—Breeding Horses, Cart Stallions and Mares.—Rearing and Training of Colts.—Age, Qualifications, and Sale of Horses.—Maintenance and Labour of Farm-horses.—Comparative Merits of Draught Oxen and Horses.—Asses and Mules.

On the Breeding, Rearing, and Fattening of Sheep.—Introductory and Comparative View of the different Breeds.—Merino, or Spanish Sheep.—Breeding and Management of Sheep.—Treatment and Rearing of House-lambs, Feeding of Sheep, Folding Sheep, Shearing of Sheep, &c.

On the Breeding, Rearing, and Fattening of Swine.—Introductory and Comparative View of the different Breeds of Swine.—Breeding and Rearing of Pigs.—Feeding and Fattening of Swine.—Curing Pork and Bacon.

On the Diseases of Cattle.—Diseases Incident to Cattle.—Diseases of Calves.—Diseases of Horses.—Diseases of Sheep.—Diseases of Lambs.—Diseases Incident to Swine.—Breeding and Rearing of Domestic Fowls, Pigeons, &c.—Palmipedes, or Web-footed kinds.—Diseases of Fowls.

On Farm Offices and Implements of Husbandry.—The Farm-house, the Farm-yard, and its Offices.—Construction of Ponds.—Farm Cottages.—Farm Implements.—Steam Cultivation.—Sowing Machines, and Manure Distributors.—Steam Engines, Thrashing Machines, Corn-dressing Machines, Mills, Bruising Machines.

On the Culture and Management of Grass Land.—Size and Shape of Fields.—Fences.—Pasture Land.—Meadow Land.—Culture of Grass Land.—Hay-making.—Stacking Hay.—Impediments to the Scythe and the Eradication of Weeds.—Faring and Burning.—Draining. Irrigation.—Warping.

On the Cultivation and Application of Grasses, Pulse, and Roots.—Natural Grasses usually cultivated.—Artificial Grasses or Green Crops.—Grain and Pulse commonly cultivated for their Seeds, for their Straw, or for Green Forage.—Vegetables best calculated for Animal Food.—Qualities and Comparative Value of some Grasses and Roots as Food for Cattle.

On Manures in General, and their Application to Grass Land.—Vegetable Manures.—Animal Manures.—Fossil and Mineral Manures.—Liquid or Fluid Manures.—Composts.—Preservation of Manures.—Application of Manures.—Flemish System of Manuring.—Farm Accounts, and Tables for Calculating Labour by the Acre, Rood, &c., and by the Day, Week, Month, &c.—Monthly Calendar of Work to be done throughout the Year.—Observations on the Weather.—INDEX.

"The standard and text-book, with the farmer and grazier."—*Farmer's Magazine.*

"A valuable repertory of intelligence for all who make agriculture a pursuit, and specially for those who aim at keeping pace with the improvements of the age."—*Bell's Messenger.*

"A treatise which will remain a standard work on the subject as long as British agriculture endures."—*Mark Lane Express.*

Scott Burn's System of Modern Farming.

OUTLINE OF MODERN FARMING. By R. SCOTT BURN. Soils, Manures, and Crops—Farming and Farming Economy, Historical and Practical—Cattle, Sheep, and Horses—Management of the Dairy, Pigs, and Poultry, with Notes on the Diseases of Stock—Utilisation of Town-Sewage, Irrigation, and Reclamation of Waste Land. New Edition. In 1 vol. 1250 pp., half-bound, profusely Illustrated, price 12s.

"There is sufficient stated within the limits of this treatise to prevent a farmer from going far wrong in any of his operations. . . . The author has had great personal experience, and his opinions are entitled to every respect."—*Observer*.

Scott Burn's Introduction to Farming.

THE LESSONS OF MY FARM: a Book for Amateur Agriculturists, being an Introduction to Farm Practice, in the Culture of Crops, the Feeding of Cattle, Management of the Dairy, Poultry, and Pigs, and in the Keeping of Farm-work Records. By ROBERT SCOTT BURN, Editor of "The Year-Book of Agricultural Facts," &c. With numerous Illustrations. Fcp. 6s. cloth.

"A most complete introduction to the whole round of farming practice."—*John Bull*.

"There are many hints in it which even old farmers need not be ashamed to accept."—*Morning Herald*.

Tables for Land Valuers.

THE LAND VALUER'S BEST ASSISTANT: being Tables, on a very much improved Plan, for Calculating the Value of Estates. To which are added, Tables for reducing Scotch, Irish, and Provincial Customary Acres to Statute Measure; also, Tables of Square Measure, and of the various Dimensions of an Acre in Perches and Yards, by which the Contents of any Plot of Ground may be ascertained without the expense of a regular Survey; &c. By R. HUDSON, C.E. New Edition, price 4s. strongly bound.

"This new edition includes tables for ascertaining the value of leases for any term of years; and for showing how to lay out plots of ground of certain acres in forms, square, round, &c., with valuable rules for ascertaining the probable worth of standing timber to any amount; and is of incalculable value to the country gentleman and professional man."—*Farmer's Journal*.

Auctioneer's Assistant.

THE APPRAISER, AUCTIONEER, BROKER, HOUSE AND ESTATE AGENT, AND VALUER'S POCKET ASSISTANT, for the Valuation for Purchase, Sale, or Renewal of Leases, Annuities, and Reversions, and of property generally; with Prices for Inventories, &c. By JOHN WHEELER, Valuer, &c. Third Edition, enlarged, by C. NORRIS. Royal 32mo, strongly bound, price 5s. [Recently published.]

"A neat and concise book of reference, containing an admirable and clearly arranged list of prices for inventories, and a very practical guide to determine value of furniture, &c."—*Standard*.

The Civil Service Book-keeping.

BOOK-KEEPING NO MYSTERY: its Principles popularly explained, and the Theory of Double Entry analysed. By an EXPERIENCED BOOK-KEEPER, late of H.M. Civil Service. Second Edition. Fcp. 8vo. price 2s. cloth.

"A book which brings the so-called mysteries within the comprehension of the simplest capacity."—*Sunday Times*.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

89078549706



B89078549706A

K.F. WENDT LIBRARY
UW COLLEGE OF ENGR.
215 N. RANDALL AVENUE
MADISON, WI 53706

SP

· H88

K.F. WENDT LIBRARY
UW COLLEGE
215 N. RANDA
MADISON, WI

E

